

# **Standard Surface Mounted 4C Horizontal Mailbox Configurations**



DOUBLE COLUMN WIDTH: 31-3/4" W SINGLE COLUMN WIDTH: 17-3/4" W

MAILBOX DOOR SIZES: MB1 - 12-3/4" W x 3-1/4" H MB2 - 12-3/4" W x 6-3/4" H

MB3 - 12-3/4" W x 10-1/4" H

MB4 - 12-3/4" W x 13-3/4" H

PARCEL LOCKER DOOR SIZES: PL3 - 12-3/4" W x 10-1/4" H

PL4 - 12-3/4" W x 13-3/4" H


PL4.5 - 12-3/4" W x 15-1/2" H

PL5 - 12-3/4" W x 17-1/4" H


PL6 - 12-3/4" W x 20-3/4" H

(Revised 11/1/21


#### **MAXIMUM HEIGHT UNITS - STANDARD HEIGHT**




3816D-20 (20 MB1, 2 PL4.5, OM2)




3816D-15 (15 MB1, 2 PL4.5, 1 PL5, OM2)




(10 MB1, 2 PL4,5, 2 PL5, OM2)




3816D-6P (2 PL4.5, 2 PL5, 2 PL6)




3816D-8P (2 PL3, 4 PL4, 2 PL4,5)



3816D-291 (29 MB1, OM1,5)



3816S-09 (9 MB1, 1 PL4.5, OM2)













3816S-141 (14 MB1, OM1.5)


### 11 DOOR HIGH UNITS- STANDARD HEIGHT




3811D-20 (20 MB1, OM2)



3811D-15 (15 MB1, 1 PL5, OM2)



3811D-10 (10 MB1, 2 PL5, OM2)



3811D-4P (2 PL5, 2 PL6)









⊕ □

3811S-2P

3811S-04 (4 MB1, 1 PL5, OM2) (1 PL5, 1 PL6)

# collection.

#### OUTGOING MAIL COMPARTMENT (OM2)

Units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail



### **OUTGOING MAIL** COMPARTMENT (OM3)

Note: Units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection. The OM3 adds a fixed panel door directly below the OM2, but does not add extra capacity for mail collection.



# OUTGOING MAIL COMPARTMENT (OM 1.5)

Note: Both front loading and rear loading units include a one and a half (1.5) door high compartment for outgoing mail collection.



### CARRIER ACCESS (CA)

Note: Carrier Access (CA) doors are only available for stand-alone parcel lockers and private use mailboxes.

Note: Salsbury Surface Mounted 4C Horizontal Mailboxes include a U.S.P.S. approved 4C horizontal mailbox unit and a matching enclosure. For delivery of U.S. mail, contact your local postmaster for approval.


<sup>1</sup>These units do not meet U.S.P.S. installation requirements and are for private delivery only unless approved by local postal authorities.




# **Standard Surface Mounted 4C Horizontal Mailbox Configurations**



(Revised 11/1/21

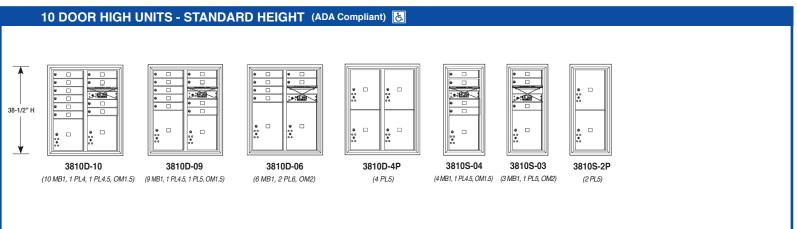

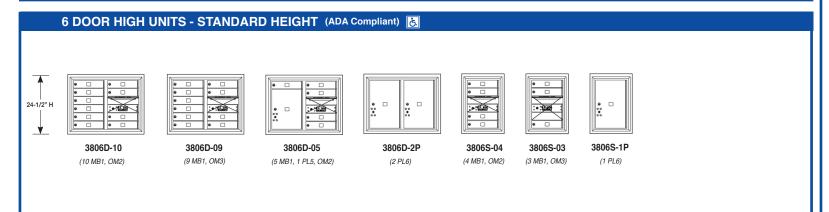

DOUBLE COLUMN WIDTH: 31-3/4" W SINGLE COLUMN WIDTH: 17-3/4" W

#### MAILBOX DOOR SIZES:

MB1 - 12-3/4" W x 3-1/4" H MB2 - 12-3/4" W x 6-3/4" H

MB3 - 12-3/4" W x 10-1/4" H MB4 - 12-3/4" W x 13-3/4" H

#### PARCEL LOCKER DOOR SIZES:

PL3 - 12-3/4" W x 10-1/4" H PL4 - 12-3/4" W x 13-3/4" H PL4.5 - 12-3/4" W x 15-1/2" H PL5 - 12-3/4" W x 17-1/4" H

PL6 - 12-3/4" W x 20-3/4" H



#### OUTGOING MAIL COMPARTMENT (OM2)

Note: Units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection.



#### **OUTGOING MAIL** COMPARTMENT (OM3)

Note: Units (excluding stand-alone parcel lockers) include a two (2) door high compartment for outgoing mail collection. The OM3 adds a fixed panel door directly below the OM2, but does not add extra capacity for mail collection.



### OUTGOING MAIL COMPARTMENT (OM1.5)

Note: Both front loading and rear loading units include a one and a half (1.5) door high compartment for outgoing mail collection.



### CARRIER ACCESS (CA)

Note: Carrier Access (CA) doors are only available for stand-alone parcel lockers and private use mailboxes.

Note: Salsbury Surface Mounted 4C Horizontal Mailboxes include a U.S.P.S. approved 4C horizontal mailbox unit and a matching enclosure. For delivery of U.S. mail, contact your local postmaster for approval.

<sup>1</sup>These units do not meet U.S.P.S. installation requirements and are for private delivery only unless approved by local postal authorities.