



Rev.	Description	Date
A		05-2020

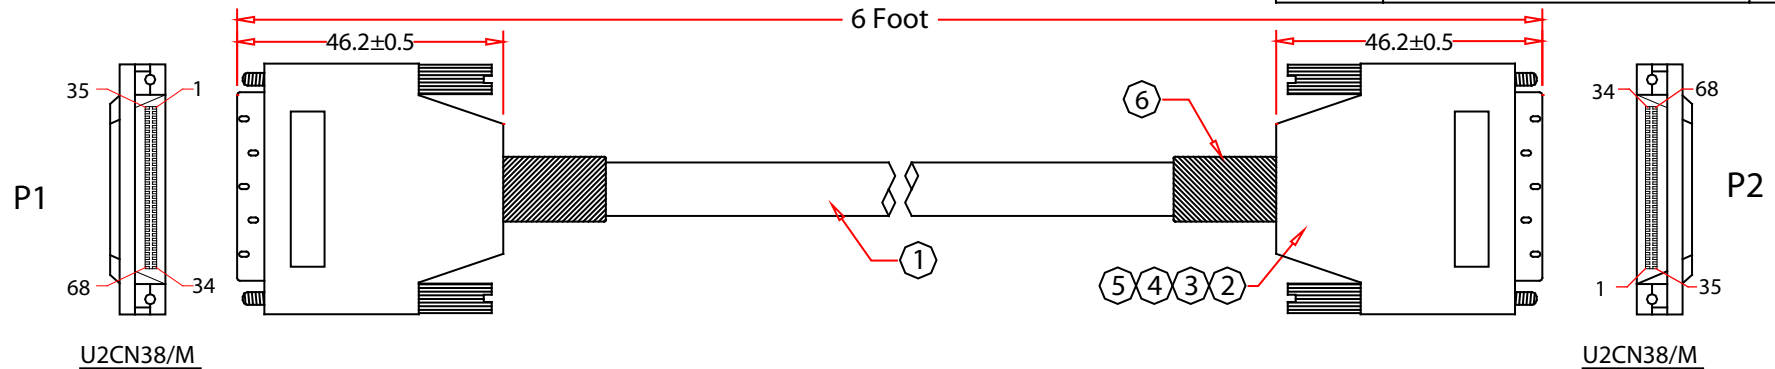

Pin Assignment

P1	P2	P1	P2	P1	P2	P1	P2	P1	P2
Brown 1	1	Orange/Green 10	10	Green/Yellow 19	19	Grey/Red 28	28		
Brown/White 35	35	Orange/Brown 44	44	Green/Black 53	53	Grey/Blue 62	62		
Brown/Red 2	2	Orange/Blue 11	11	Blue 20	20	Grey/Yellow 29	29		
Brown/Blue 36	36	Blue/Red 45	45	Blue/White 54	54	Grey/Black 63	63		
Brown/Black 3	3	Yellow 12	12	Blue/Yellow 21	21	White/Red 30	30		
Brown/Yellow 37	37	Yellow/White 46	46	Blue/Black 55	55	White/Blue 64	64		
Red 4	4	Yellow/Red 13	13	Blue/Green 22	22	White/Yellow 31	31		
Red/White 38	38	Yellow/Blue 47	47	Blue/Brown 56	56	White/Black 65	65		
Red/Yellow 5	5	Yellow/Green 14	14	Purple 23	23	Black 32	32		
Red/Black 39	39	Green/Brown 48	48	Purple/White 57	57	Black/White 66	66		
Red/Green 6	6	Yellow/Brown 15	15	Purple/Red 24	24	Black/Red 33	33		
Red/Brown 40	40	Brown/Green 49	49	Purple/Blue 58	58	Black/Blue 67	67		
Red/Blue 7	7	Yellow/Black 16	16	Purple/Yellow 25	25	Black/Green 34	34		
Orange/Red 41	41	Brown/Yellow 50	50	Purple/Black 59	59	Black/Brown 68	68		
Orange 8	8	Green 17	17	Purple/Green 26	26	Shield	Shield		
Orange/White 42	42	Green/White 51	51	Purple/Brown 60	60				
Orange/Yellow 9	9	Green/Red 18	18	Grey 27	27				
Orange/Black 43	43	Green/Blue 52	52	Grey/Brown 61	61				



RoHS

6	Black Heat Shrink Tube	<table border="1"> <tr> <td>Item Number:</td> <td>10N3-14106</td> </tr> <tr> <td>Title:</td> <td>SCSI III Cable, VHDCI 68 (0.8mm) Male, Offset Orientation, 6 foot</td> </tr> <tr> <td>Drawn by:</td> <td>JL</td> </tr> <tr> <td>Approved by:</td> <td>MAC</td> </tr> <tr> <td>ID:</td> <td>1</td> </tr> </table>	Item Number:	10N3-14106	Title:	SCSI III Cable, VHDCI 68 (0.8mm) Male, Offset Orientation, 6 foot	Drawn by:	JL	Approved by:	MAC	ID:	1
Item Number:	10N3-14106											
Title:	SCSI III Cable, VHDCI 68 (0.8mm) Male, Offset Orientation, 6 foot											
Drawn by:	JL											
Approved by:	MAC											
ID:	1											
5	U2CN68P Male, Metal Hood											
4	Copper Foil											
3	Screw 5*44.84mm,#2-56											
2	U2CN68P Male, Gold Flash on Contacts, Black Insulator, Assembly Type											
1	UL20276, 34 Twisted Pairs 30AWG, Alum-Mylar Foil and Copper Braid Shielding with Drain Wire, OD:9.8mm, Black Outer PVC Jacket											
No.	Specifications											

