



| REV. | DESCRIPTION | DATE |
|------|-------------|---------|
| A | | 03-2016 |
| | | |

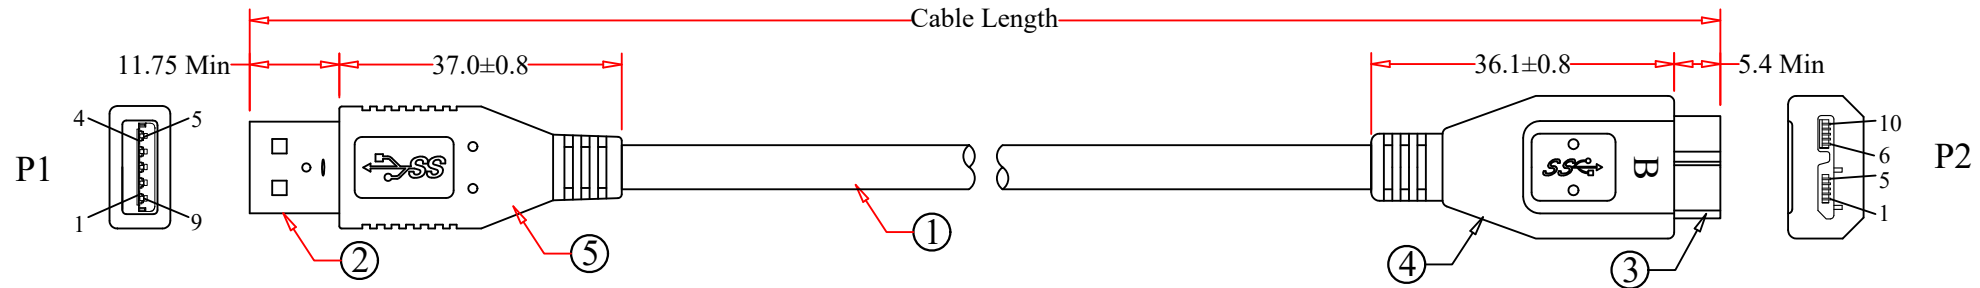

| Pin Assignment | | |
|----------------|---------------|-------|
| P1 | | P2 |
| 1 | Red | 1 |
| 2 | Green | 2 |
| 3 | White | 3 |
| 4 | Black | 5 |
| 5 | Blue(Yellow) | 6 |
| 6 | White(Blue) | 7 |
| 7 | Drain | 8 |
| 8 | Red(Orange) | 9 |
| 9 | White(Purple) | 10 |
| Shell | Braid+Drain | Shell |

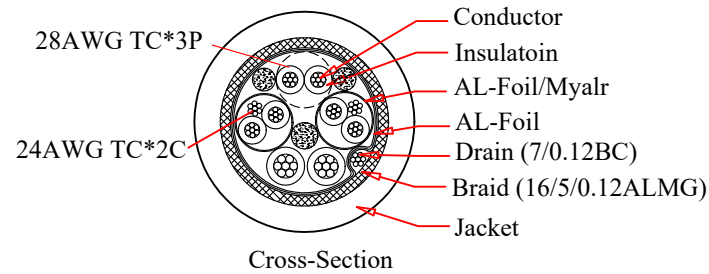

RoHS

| PART NO. | CABLE LENGTH | |
|--------------|--------------|---------|
| | L | ±T(mm) |
| 10U3-03101BK | 1 FT | -10/+50 |
| 10U3-03103BK | 3 FT | ±50 |
| 10U3-03106BK | 6 FT | ±50 |
| 10U3-03110BK | 10 FT | ±50 |

NOTES:

- 1.Electrical Test:
(1)100% Open Short & Miswire Test.
(2) Insulation Resistance 1 MΩ MIN.

| 4 | Black Molded PVC |
|-----|---|
| 3 | USB3.0 Micro B Male, Contact:Gold Flash, Shell: Nickel Plated, Insulation Black |
| 2 | USB3.0 Type A Male, Contact:Gold Flash, Shell: Nickel Plated, Insulation Blue |
| 1 | UL2725[28AWG(7/0.127TC)*1P+D(7/0.12TC)+AL-Foil+Mylar]*2C+28AWG(7/0.27TC)*1P+24AWG(7/0.20TC)*2C+AEB(16/5/0.12ALMG),OD: 5.5±0.2mm, Black Outer PVC Jacket |
| NO. | SPECIFICATIONS |

BOM LIST

| | | | | |
|-------------|--|------|---|----|
| ITEM NUMBER | 10U3-031xxBK | | DRAWER | JL |
| TITLE | USB 3.0 Cable,Black Type A Male /Micro B Male | | CHECKED | |
| MATERIAL | SCALE | | APPROVED | |
| REV. | A | UNIT | INCH | |
| DRAWING NO: | | | 888-212-8295.com CableWholesale.com | |
| ID(NO.) | 124 | | | |