


Rev.	Description	Date
A		03-2020

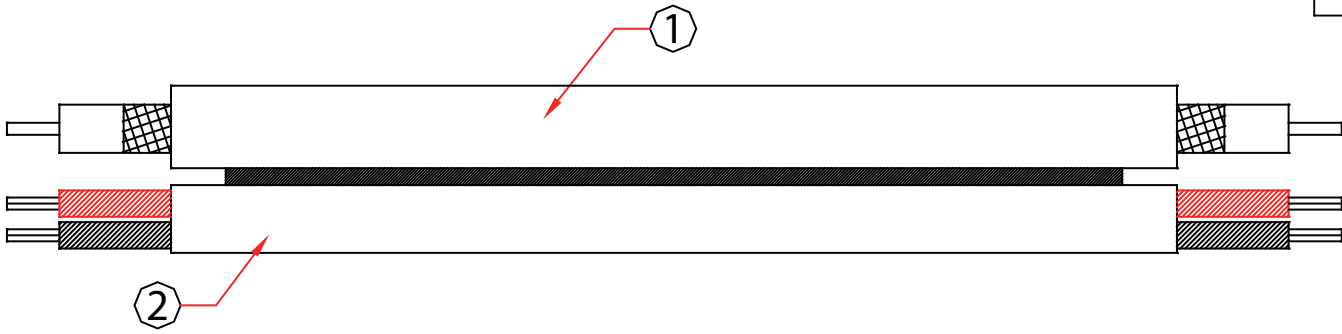


Attenuation	
MHz	dB/100ft
1	1.15
50	5.71
100	8.20
400	11.61
700	16.72
900	22.15
1000	28.87

Electricals	
Impedance	75 ±3 OHMS
Capacitance	15.5 pF/ft
Velocity of Propagation	84%
Conductor DC@20°C	28.6 OHMS/1000ft


Coaxial Cable Specifications:

RG59 75 Ohm Coaxial Cable
 20AWG(1/0.81mm) Solid Bare Copper Center Conductor
 AL-Mylar Foil Shield
 Bare Braid (95% Coverage)
 3.66mm OD Skin Foamed PE Dielectric
 6.0mm OD Black PVC Jacket

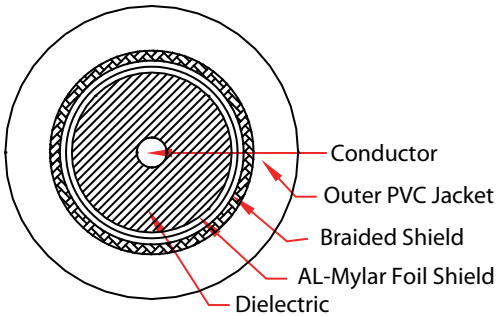

Power Cable Specifications:


2 x 18AWG Solid Bare Copper Center Conductor
 1 Pair Black and Red Wire, Material PVC
 4.5mm OD Black PVC Jacket

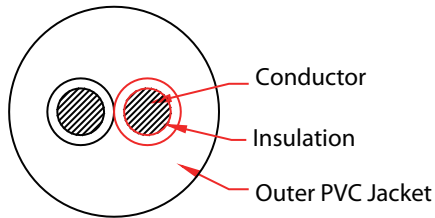

RoHS

PART NO.	COLOR	CABLE LENGTH	PACKING
10X3-18222TF	Black	500 FT	500 FT
10X3-18222NH	Black	1000 FT	Pullbox
10X3-18291TF	White	500 FT	500 FT
10X3-18291NH	White	1000 FT	Pullbox

2	2x18AWG Solid Copper, Black and Red Insulation,OD:4.5mm, CMR , Outer PVC Jacket
1	RG59 Cable, 75 Ohm with AL-Mylar and 95% CCA Braided Shield, OD6.0mm, CMR, Outer PVC Jacket
No.	Specifications

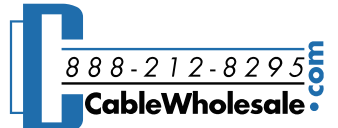Item Number:	10X3-182xxTx	
Title:	Bulk RG59 Siamese Coaxial/Power Cable, 95% Braid, 18/2(18AWG 2 Conductor) Copper Power	
Drawn by:	JL	
Approved by:	MAC	
ID:	125	