

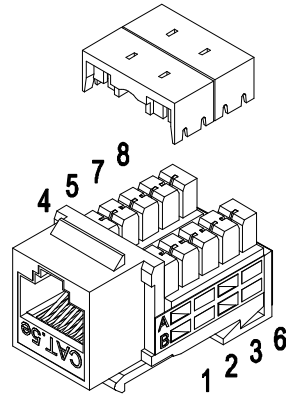
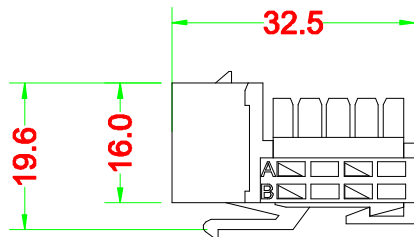


# Cat.5e RJ-45 Narrow Keystone Jack (UTP) / M Type (For 110)



## Dimensions : m/m



## Color coding information

T568B:	T568A:
1—WH/OR	1—WH/GN
2—OR	2—GN
3—WH/GN	3—WH/OR
4—BL	4—BL
5—WH/BL	5—WH/BL
6—GN	6—OR
7—WH/BR	7—WH/BR
8—BR	8—BR

## Performance:

Meets Cat.5e EIA/TIA 568B.1 Standard.

## Materials:

Plastic Body : Fireproof ABS UL-94V0  
 Plastic Cap : Fireproof PC  
 RJ-45 Jack : 8P8C 50 micro inches gold plated  
 PCB : FR-4 / 1.0mm UL-94V0  
 IDC Body : Fireproof ABS UL-94V0  
 IDC Cap : Fireproof PC  
 IDC Pin : Bronze & Tinned

Label Color Code : T568 A/B

IDC Description : For 22-26 AWG.

For 110 punch-down Tool

## Electrical Specifications:

Insulation Resistance : 500M ohms (min.)  
 Contact Resistance : 20m ohms (max.)  
 Current Rating : 1.5 Amps .  
 DC Resistance : 0.1 ohm (max.)  
 Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

## Mechanical Specifications:

IDC Punch Down Cycle : Over 25 Cycles (min.)  
 RJ-45 Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 ~ +70 degree / C

DRAW NO:		ITEM NO:	310-120
	APPR	CUSTOMER:	
UNIT:	m/m	DATE:	
SCALE:	DESIGN	TOLERANCE:	· ± 1 · X ± 0.2 · XX ± 0.15