


| REV. | DESCRIPTION | DATE |
|------|-------------|---------|
| A | | 12-2017 |
| | | |

End Cap Specifications

| General Specifications | |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Fungus Resistance | ASTM G21 Zero Rating Per GR 3126 Requirement |
| Crush Resistance | 300 lbs. per GR3126 Requirement |
| UOM | 10 / Pack |
| Warranty | 1 Year Defects In Workmanship / 10 Year Environmental |
| Installation Temperature Range | -18°C ro 45°C (0°F to 113°F) |
| Chemical Resistance | Retains a minimum of 50% of tensile strength after 30 day exposure to 3% H2SO4, .2N NaOH, NH3, 90% Alcohol, Kerosene, 10% Igepal |
| Physical Specifications | |
| Dimensions | .75" |
| Color | Ivory / White |
| Material | Rigid Flexible PVC |
| Environmental Specifications | |
| Operating Temperature | -18°C to 58°C (0°F to 136°F) |

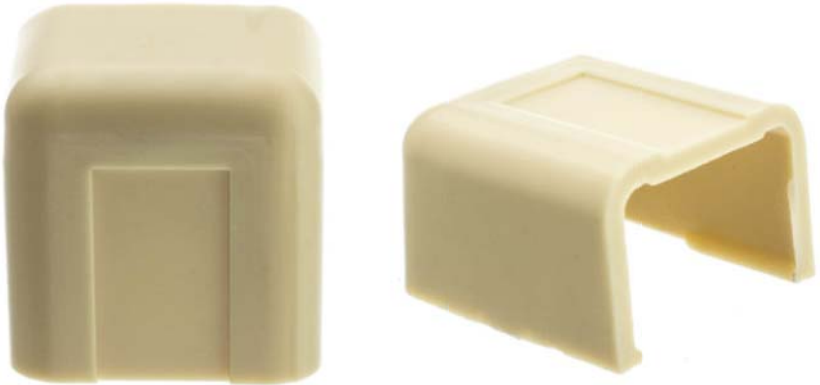

| PART NO. | COLOR |
|------------|-------|
| 31R1-005IV | Ivory |
| 31R1-005WH | White |

RoHS

| | | | | | |
|-------------|-----------------------------------------------|-------|------|----------|----|
| ITEM NUMBER | 31R1-005xx | | | DRAWER | JL |
| TITLE | 3/4 inch Surface Mount Cable Raceway, End Cap | | | CHECKED | |
| | | | | APPROVED | |
| MATERIAL | | SCALE | | | |
| REV. | A | UNIT | INCH | | |
| DRAWING NO: | | | | | |
| ID (NO.) | 271 | | | | |