

Neckloop

BE9159/BE9161



Features

- 1 **High output power**
Dual channel output
- 2 **Safety breakaway neck strap**
To avoid strangulation
- 3 **Replaceable soft fabric tube**
For comfort and hygiene
- 4 **Soft spray-coated housing**
For increased comfort
- 5 **Silicone cable material**
For easy handling
- 6 **Tie-clip**
For correct positioning
- 7 **Gold plated plugs**
To avoid corrosion

Boost your hearing aids.

The neckloop from Bellman & Symfon works with sound sources that feature a 3.5 mm output. Connect it to your speech amplifier, mobile, tablet or computer and switch the hearing instruments to "T" position. The neckloop is lightweight and comfortable and can be worn under your shirt.

Technical specifications

- Neck strap length 70 cm, 2.3'
- Cable length BE9159 90 cm, 2.9'
- Cable length BE9161 15 cm, 0.5'
- Neckloop diameter 22 cm, 8.7"

Size housing

- Width 3.4 cm, 1.3"
- Height 3.8 cm, 1.5"
- Thickness 1.4 cm, 0.5"
- Weight 60 g, 2.1 oz

Output

- ≥ 1700 mA/m @ 15 cm / 6" distance and 2 x 50 mW input signal

Input


- 3.5 mm tele plug (stereo) gold plated connector, 90 degrees angle
- Impedance: 2 x 5 ohm







Technical specifications

Frequency response (Scale reference: -20 dB ~ 0.1 A/m)

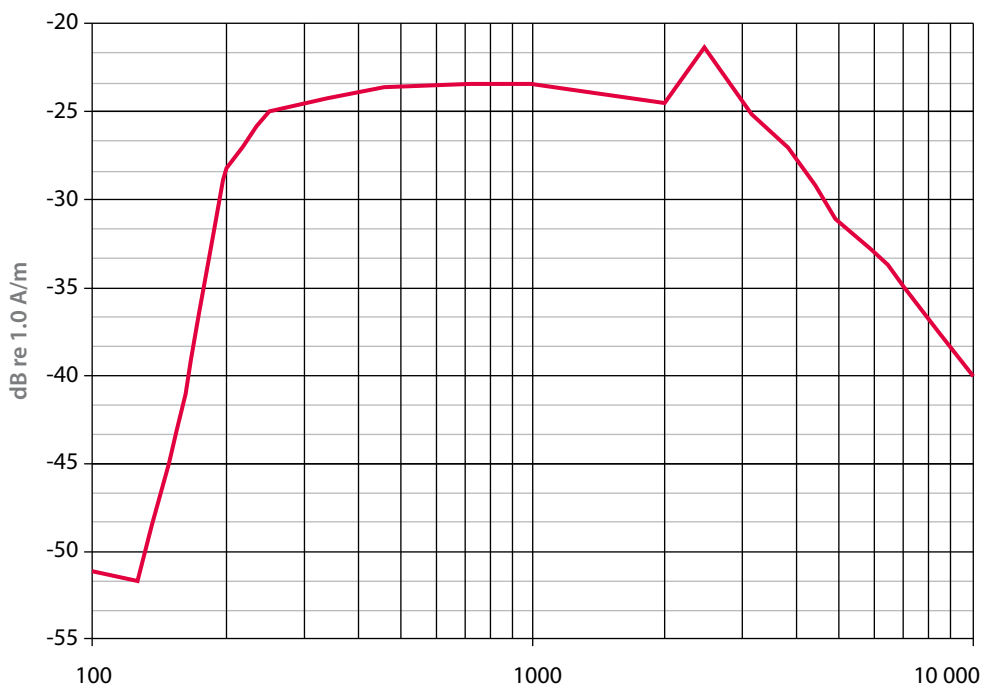

Using BE9161 with Domino and Mino

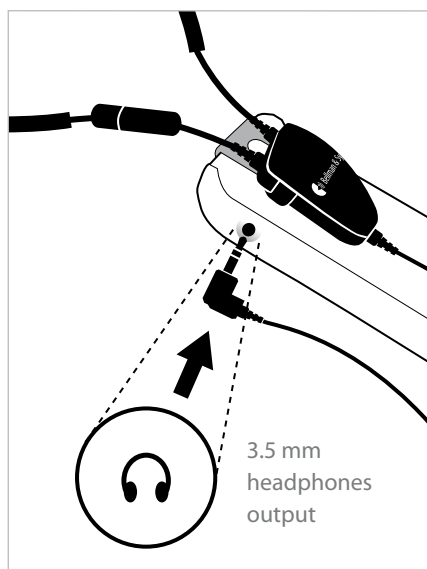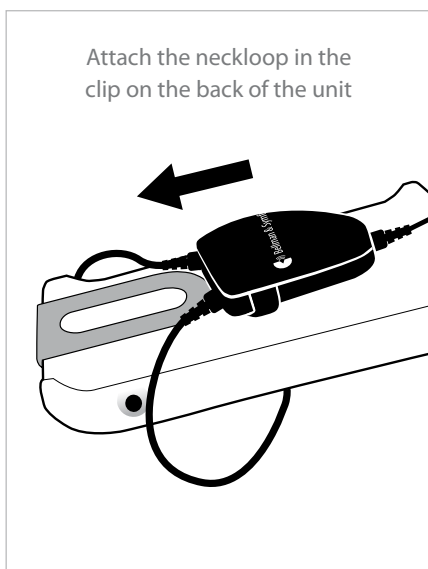

© 2016, Bellman & Symfon AB. All rights reserved.

Bellman, Bellman & Symfon and the Bellman & Symfon logo are registered trademarks of Bellman & Symfon AB. This leaflet is subject to change without prior notice.

BE9159_BE9161_001DAS008

bellman.com