



Features

- Low torque
- Carbon element
- Plain or knurled shaft option
- Metal bushing
- Metal shaft
- Rear solder lugs
- Audio or linear taper options



- Variety of resistance values
- RoHS compliant*

PDB241-GTR Series - 24 mm Guitar Potentiometer

Electrical Characteristics

Taper..... Audio, linear
 Standard Resistance 10K to 1M ohms
 Standard Resistance Tolerance..... ±20 %


Environmental Characteristics

Operating Temperature -10 °C to +70 °C
 Power Rating 0.25 watt
 Maximum Operating Voltage 250 V
 Rotational Noise 150 mV max.




Mechanical Characteristics

Mechanical Angle 300 ° ±5 °
 Rotational Torque 10 to 45 g-cm
 Stop Strength..... 8 kg-cm min.
 Rotational Life..... 15,000 cycles min.
 Soldering Condition
 Manual Soldering 300 °C within 3 seconds
 Wave Soldering 260 °C within 3 seconds
 Hardware Two flat washers and two mounting nuts supplied per potentiometer

Derating Curve

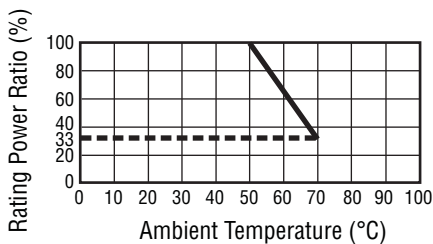


Product Dimensions

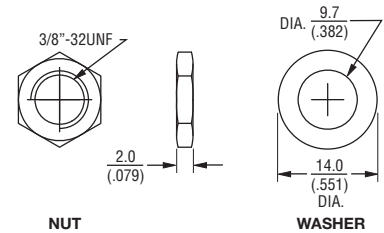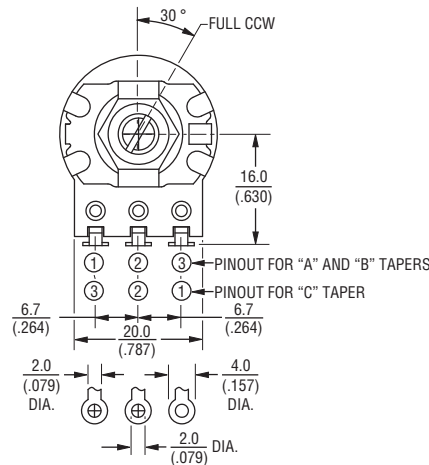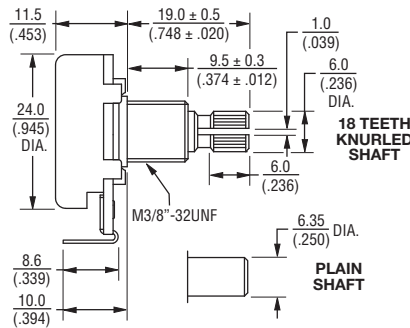


TOLERANCES:
 UNDER $\frac{10.0}{(.394)} = \frac{\pm 0.3}{(\pm 0.012)}$ $\frac{10.0 \sim 100}{(.394 \sim 3.937)} = \frac{\pm 0.5}{(\pm 0.020)}$

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$



Circuit




*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011. Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

PDB241-GTR Series - 24 mm Guitar Potentiometer

BOURNS®

Taper Charts

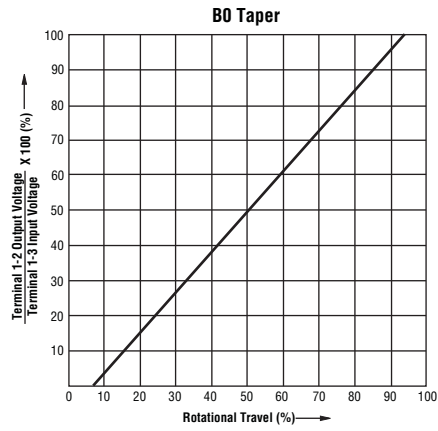

Specifications are subject to change without notice.
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
Users should verify actual device performance in their specific applications.