

FEATURES

- Small size; just under 1-1/2" diameter, about 3/8" high
- Pre-applied 3M™ VHB™ adhesive for quick, durable installation
- Rare-earth neodymium motor with cooling vents for higher power handling
- 4 ohms impedance for use with small, Class D amplifiers
- Strategically-placed vent holes cool this exciter's voice coil for higher power handling


APPLICATIONS

- Invisible home theater and multi-room audio
- Electronic gaming machines
- Advertising signage
- Point-of-purchase displays
- Multimedia exhibits
- Commercial distributed audio
- Kiosks
- Automotive audio
- Bathroom tubs and showers

PARAMETERS


| | |
|-----------------------------|-----------------|
| Impedance | 4 ohms |
| Re | 3.8 ohms |
| Le | 0.04 mH @ 1 kHz |
| Fs | 637 Hz |
| Qms | N/A |
| Qes | N/A |
| Qts | 2.34 |
| Mms | 0.58 g |
| Cms | 0.0001 mm/N |
| Sd | N/A |
| Vd | N/A |
| BL | 1.78 Tm |
| Vas | N/A |
| Xmax | N/A |
| VC Diameter | 19 mm |
| SPL | N/A |
| RMS Power Handling | 5 watts |
| Usable Frequency Range (Hz) | N/A |

IMPEDANCE/PHASE

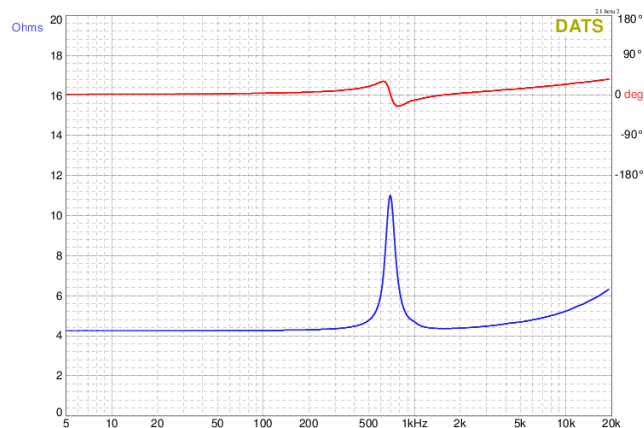

Measurement taken with transducer uncoupled facing upward.

FREQUENCY RESPONSE

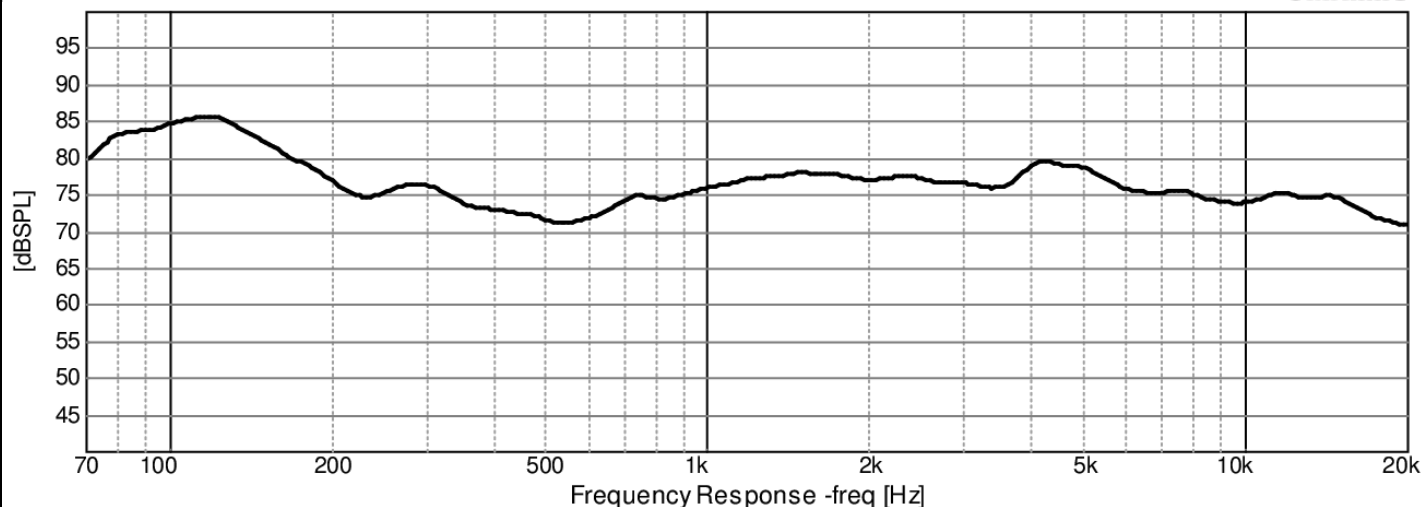

OmniMic

1/3rd octave smoothing - measurement taken with transducer adhered off-center on a 12" x 12" x 1/2" foam core board in an infinite baffle setup.

Note: This information is for comparison purposes only, the actual frequency response will depend on many factors of which the diaphragm being the greatest contributor.