



FiP18Mg's magnesium body delivers an ultra light tool with Senco dependability. The oil free design, selective trigger, rear exhaust and rotating belt hook combine to provide a tool that will perform the toughest jobs while delivering professional results and comfortable operation.

## Applications:

Chair Rail, Baseboards, Ornamentals, Case Backs, Cabinetry, Furniture Repair, Small Trim and Craft Assembly

## FinishPro® 18Mg Features and Benefits:


- Magnesium mainbody provides a durable and ultra light tool for comfortable extended use.
- Oil free motor eliminates oil carryover onto the work surface, protecting your hard work.
- Metal cylinder for increased durability.
- Selectable trigger lets you control the fastening method with the flip of a switch.
- Rotatable rear exhaust and belt hook keeps dust and debris off the work surface while keeping your tool at the ready.
- Over-molded rubber grip, swivel plug and reload indicator will keep you working comfortably and efficiently through out the day.
- Includes case, swivel plug and wrench.

## Specifications:

Item#: 1U0021N  
 Reg. Operating Pressure: 70-120 psi (4.8 - 8.3 bar)  
 Air Consumption (60 cycles per min.): 0.84 scfm  
 Air Inlet: 1/4" NPT  
 Tool Weight: 2.48 lbs (1.12 kg)  
 Height: 9 3/4" (247.7 mm)  
 Length: 10 1/2" (266.7 mm)  
 Width: 2 1/2" (63.5 mm)  
 Fastener Capacity: 110

## Fastener Specifications:

Gauge: 18  
 Fastener Range: 5/8" – 2 1/8" (15.9 mm - 53.9 mm)




## Genuine Senco Fasteners Available:

Length	Item Code	Carton Count	Finish
5/8"	AX10EAA	5M	Galv
1"	AX13EAA	5M	Galv
1"	A201009	1M	Galv
1 1/4"	AX15EAA	5M	Galv
1 1/4"	A201259	1M	Galv
1 1/2"	AX17EAA	5M	Galv
1 1/2"	A201509	0.8M	Galv
1 5/8"	AX18EAA	5M	Galv
1 3/4"	AX19EAA	5M	Galv
2"	AX21EAA	5M	Galv
2"	A202009	0.8M	Galv
2 1/8"	AX22EAA	5M	Galv

## Variety Packs:

5/8" - 1 1/4"	A209809	1.2M	Galv
1" - 2"	A209909	1.2M	Galv

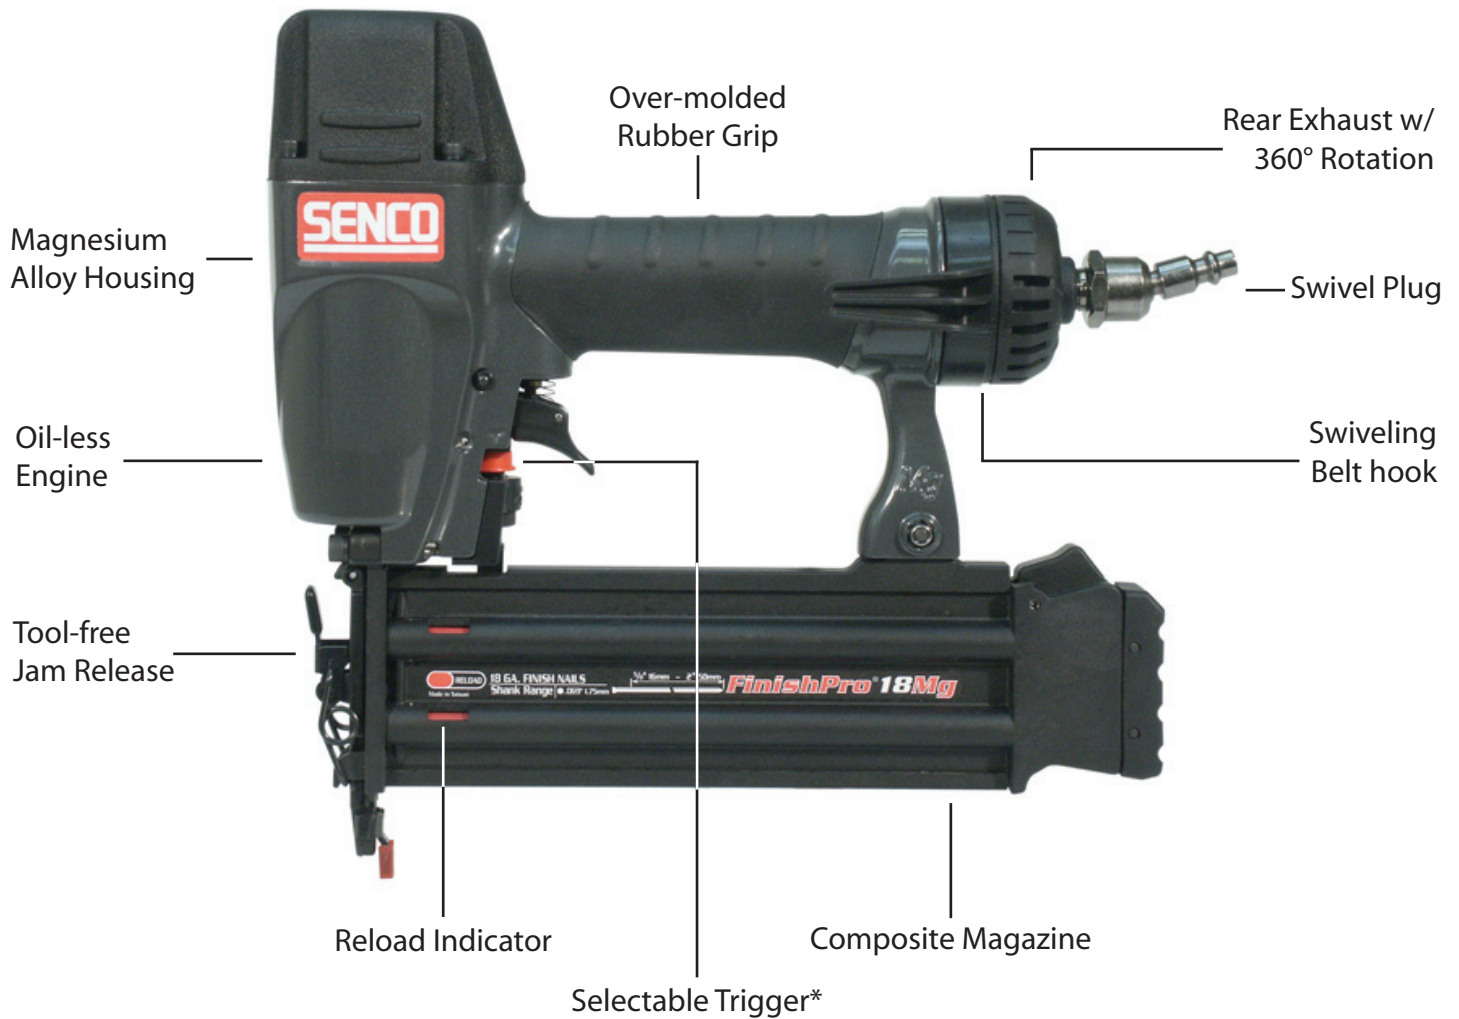

**\*Choose the right actuation mode!**

**Sequential Actuation** (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

**Contact Actuation** (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tool to ensure proper use and safety precautions. For additional information on trigger systems and how SENCO will save you time, reduce costs and increase quality, call our toll-free Action Line: 800-543-4596, or visit our website at: [www.senco.com](http://www.senco.com)