


SALICE

e●centra

With integrated soft close

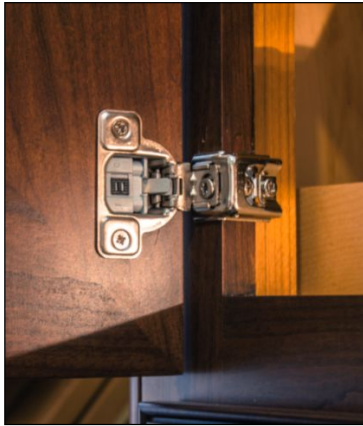

Silentia Series U




Set dampening effect to "OFF"
by sliding the switch to **0**




Set dampening effect to "ON"
by sliding the switch to **I**


Featuring
motion control
switch



Cam depth Adjustment
- 0.5 mm, + 2.5 mm



Cam Side adjustment
Type 37 - 1.8 mm, + 2.5mm
Type 3A - 2.0mm, + 3.0 mm




Height adjustment
-3.0mm, +3.0mm

- LIFETIME WARRANTY -

Type 37: Overlay (D)				
K	2.5mm	4mm	5mm	6mm
D	12.7mm	14.2mm	15.2mm	16.2mm

Type 3A: Overlay (D)				
K	2.5mm	4mm	5mm	6mm
D	31.7mm	33.2mm	34.2mm	35.2mm

* K = 6mm possible with radius door edge only.

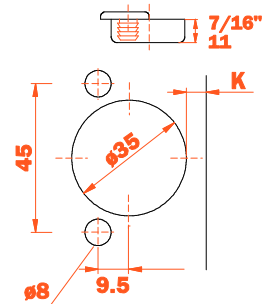

Features & Benefits

- ✓ Technology that delivers soft closing doors that respond with a smooth steady motion.
- ✓ Edge bore distance possible from **2.5 to 6mm** to accommodate profile edge doors and allowing overlay fine tuning.
- ✓ Perfect door alignment is simple to achieve with 2 automatic cam adjustments.
- ✓ Features an 11mm cup depth to accommodate deep edge profiles.
- ✓ Increased range of side adjustment (-2mm, +3mm) insures small, consistent gaps between doors.
- ✓ The easy to use activation switch allows for closing speed options.

ITEM NUMBER	DESCRIPTION	CUP DEPTH	BOX QUANTITY
CUP37D9	1/2" overlay, soft close, screw-on	11mm	300
CUR37D9	1/2" overlay, soft close, with dowels	11mm	300
CUP3AD9	1-1/4" overlay, soft close, screw-on	11mm	300
CUR3AD9	1-1/4" overlay, soft close, with dowels	11mm	300

**Required rams
to machine insert U Series**

Ram for Omal TOMINI110 and TOMICMAN & Blum machines:
Ram for Omal TOMIC116, TOMIC216, TOMIC236:

TKRAM110FF - New
TOMRAM