

The SENCOR SLP20 Brad Nailer drives both slight-headed and medium-headed brads in a wide range of lengths. As the result of extensive customer research, the SLP20 design ensures unmatched ease of use as well as superior precision and driving power, which makes the tool suitable for fastening a variety of material types and thicknesses.



Applications

Cabinets, decorative Trim, drawers, finishing apps in construction, furniture frames, furniture trim, mirror and picture frames, molding, nailable plastic parts, rattan furniture, upholstery trim panels, window beading and finish and trim.

Features and Benefits


- Five-year limited warranty
- Drives both slight-headed and medium-headed brads to give you two tools in one.
- Weighs only 2.3 lbs. – the lightest weight available in a brad nailer.
- Features easy side loading plus E-ZClear jam removal.
- Comfort-grip handle and the best balance and lowest recoil in the industry.
- Superior power (40% more than comparable tools) makes it suitable for use on hardwood, plastics, and particleboard.
- Oil-free design means no lubrication to stain fine woods.
- Rugged composition enables magazine to withstand on-the-job stress.
- Requires minimum maintenance, with only two movable O-rings for virtually trouble-free upkeep.
- Repair is easy, using only two Allen wrenches and the do-it-yourself SENCOParts Kit.
- Comes complete in its own heavy-duty plastic case.
- Muffler ensures quieter operation.

Specifications

Item#.....	430101N
Sequential actuation trigger	
Reg. Operating Pressure.....	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 cycles per min.) ...	1.92 scfm
Air Inlet.....	1/4" NPT
Tool Weight	2.3 lbs (1 kg)
Height.....	8.25" (210 mm)
Length	9.5" (50 mm)
Width	2" (50 mm)
Fastener Capacity.....	110

Fastener Specifications

Gauge.....	18
Fastener Range	5/8" – 1 5/8"
Finish.....	Galvanized
Collation.....	Straight glued strip

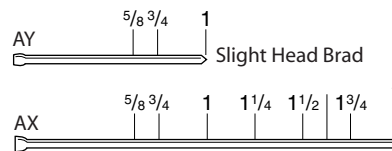

Available Genuine SENCOR Fasteners

Length	Item Code	Count	Finish	Package
5/8"	AY10EAA	5M	Galv	Box
3/4"	AY11EAA	5M	Galv	Box
1"	AY13EAA	5M	Galv	Box
5/8"	AX10EAA	5M	Galv	Box
1"	AX13EAA	5M	Galv	Box
1 1/4"	AX15EAA	5M	Galv	Box
1 1/2"	AX17EAA	5M	Galv	Box
1 5/8"	AX18EAA	5M	Galv	Box
1"	A201009	1M	Galv	Clamshell
1 1/4"	A201259	1M	Galv	Clamshell
1 1/2"	A201509	0.8M	Galv	Clamshell

Variety Packs:

5/8" - 1 1/4"	A209809	1.2M	Galv	Clamshell
1" - 2"	A209909	1.2M	Galv	Clamshell



Choose the right actuation model!

Sequential Actuation Trigger (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation Trigger (also known as dual action, bounce or bottom fire) operates in the following sequence - pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.



For additional information on how Senco will save you time, reduce costs, and increase quality, call us at 1-800-543-4596 to find your nearest Authorized Senco Dealer or Distributor or visit our web site at: www.senco.com