
## PLEASE NOTE:

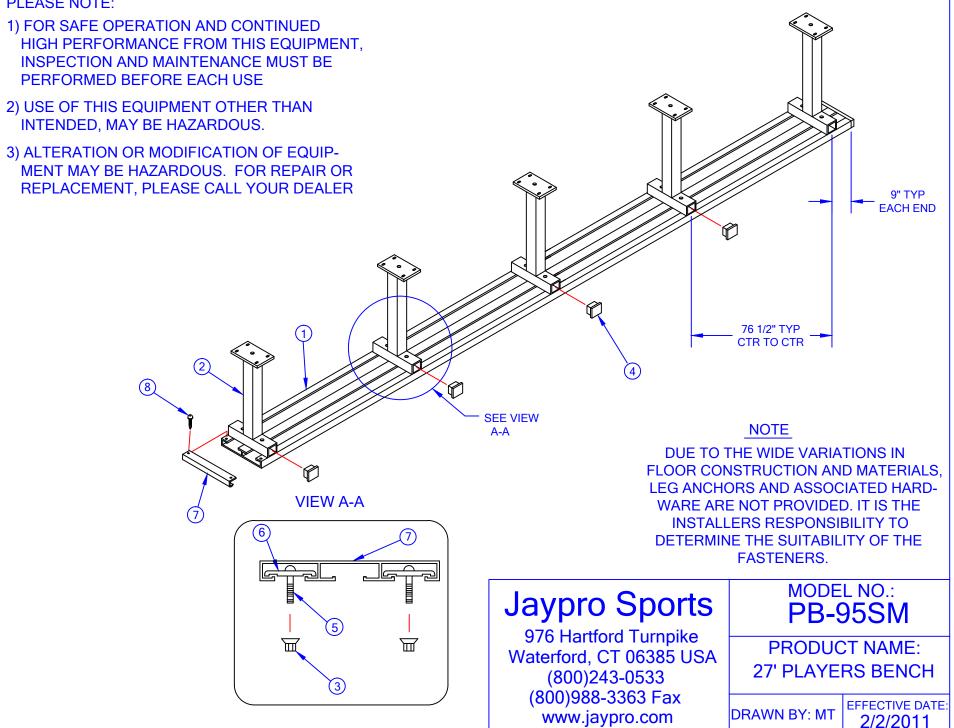

## **JAYPRO SPORTS**

## 27' PLAYER'S BENCH, PB-95SM LIST OF MATERIALS

<u> PART #</u>	DESCRIPTION	<u>QTY.</u>
AR5111	SEAT PLANK 27'	1
SML	BENCH LEG	5
HN5046	5/16" FLANGE NUT	10
EP0018	2" x 2" END CAP	10
HB5030	5/16"-18 x 3" CARRIAGE BOLT	10
AR5044	HOLD DOWN CLIP	10
AR5045A	END CAP	2
HS5035	#8 PAN HEAD SCREW x ½"	4
	AR5111 SML HN5046 EP0018 HB5030 AR5044 AR5045A	AR5111SEAT PLANK 27'SMLBENCH LEGHN50465/16" FLANGE NUTEP00182" x 2" END CAPHB50305/16"-18 x 3" CARRIAGE BOLTAR5044HOLD DOWN CLIPAR5045AEND CAP

## ASSEMBLY INSTRUCTIONS

TOOLS REQUIRED: PHILLIPS SCREWDRIVER BIT W/ ELECTRIC DRILL (1), 1/2" SOCKET WRENCH OR ADJUSTABLE WRENCH (1)

- Slip the end caps (7) snugly onto each end of the plank (1). Using the electric drill, assemble a self-drilling screw (8) through the cap and into the flange of the plank. Two screws are required per end cap.
- 2) For easiest assembly, position seat plank (1) on a level raised surface such as a desk top, bleacher seat or work bench. Place the carriage bolt (5) and bolt clips (6) approximately into place within the slots of the plank. Note that the legs should be no more than 8" from the plank edge or 9" from edge to center leg.
- 3) Position the legs as shown and loosely assemble the hardware illustrated in detail 'a-a'. Do not fully tighten the hardware at this time. Level the bench and make sure the legs are adequately spaced apart. Tighten all fasteners fully.
- 4) Locate assembled bench into position and carefully mark the hole locations for each mounting plate. Use fasteners (minimum 3/8" diameter) appropriate for your surface material. Follow manufacturer's instructions fully.