

# OIL FILTER WRENCHES & LUBRICATION

## 2505 H.D. SPIDER TYPE WRENCH

Three clamping legs are driven a by gear-mechanism for maximum range and superior gripping. 3/8" drive. 61-121mm range.



## 2508 H.D. BI-DIRECTIONAL SPIDER TYPE WRENCH

Internal gear to remove & install oil filters. 3/8" square drive & 1/2" square drive adapter w/ hex. 60-120mm range.



## H.D. SWIVEL TYPE WRENCH

Extra-thick yoke w/ expanding link mechanism, adjusting screw to tighten or loosen swivel & thick cushion grip.

No.	Range	Applications
2538	57-73mm	Sub-compact & Fuel Filters
2540	65-83mm	Small Filters
2545	75-95mm	Standard Filters
2548	92-111mm	Large Filters
2551	120-146mm	Caterpillar/John Deere
2552	100-120mm	Cummins/Detroit Diesel



## H.D. SWIVEL TYPE WRENCH SET WITH STAND

Four piece oil filter wrench set with rubber-coated stand with flanged and magnetic base.

No.	Description	Includes
4325	Standard	2538, 2540, 2545, 2548
4325T	Large/Truck	2545, 2548, 2551, 2552
4325X50	Stand Only	



## 2535 H.D. SLOTTED/SWIVEL TYPE OIL FILTER WRENCH

3-step slotted link and heavy duty design. 73-111mm range.



**NARROW BAND SWIVEL TYPE WRENCH**  
16mm wide band for hard to reach filters. Swivel design, locking nut, heavy-duty yoke, comfort grip and link mechanism.

No.	Range	Application
2587	65-83mm	Compact filters
2588	75-95mm	Standard filters



**BAND TYPE WRENCH**  
Comfort grip handle with dimpled band.

No.	Range	Application
2515	64-83mm	Compact filters
2516	83-95mm	Standard filters



## A280 SLOTTED BAND TYPE WRENCH

Adjusts for wide application range. 76-102mm range.



## 2594 CHAIN BAND TYPE WRENCH

Chain allows for adjustment and better gripping. 9" (228mm) chain. 70-115mm range.



## SQUARE DRIVE - AUTO WRENCH

Narrow band for tight clearance. 3/8" square drive.

No.	Range	Application
2520	71-79mm	Compact filters
2525	87-95mm	Standard filters



## SQUARE DRIVE - TRUCK WRENCH

Heavy-duty for high torque requirements. 1/2" square drive.

No.	Range	Application
2565	104-118mm	Cummins/Detroit Diesel
2567	118-131mm	John Deere
2569	131-144mm	Caterpillar



## PLIERS TYPE WRENCH

Adjustable jaws w/ long, comfort grip handles.

No.	Range	Application
2532	48-89mm	Compact filters
2534	54-108mm	Standard filters
2536	92-152mm	Truck filters



## 2537 OFFSET PLIERS TYPE WRENCH

Angled head for greater access in tight areas. Adjustable jaws w/ long handles. 64-117mm range.



## 2530 RATCHETING PLIERS TYPE WRENCH

Self-adjusting ratchet for multiple settings. Extra-long handles. 50-125mm range.



## CAM-ACTION WRENCH

Two thick jaws slide using cam mechanism. 3/8" square & 7/8" hex drive.

No.	Range	Application
2550	48-89mm	Compact filters
2555	54-108mm	Standard filters



## 2595 STRAP TYPE WRENCH

2" wide band on 5-1/2" handle with 1/2" square drive. Up to 152mm range.




## 2596 H.D. STRAP TYPE WRENCH

2" wide band assembled on forged handle. 3/8" and 1/2" drive ends. Up to 229mm range.



## 8766 VW/AUDI HALDEX OIL FILTER WRENCH

Removes Haldex oil filter housings on rear differential on Audi TT & VW R32 AWD. Angled head with 48mm x 12 pt wrench end. 15" (38cm) handle with hang hole.

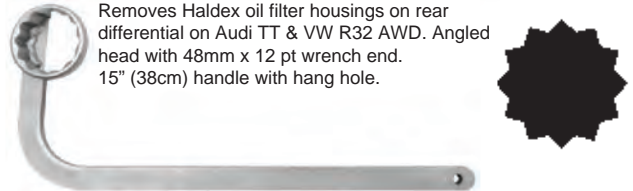

## 8-1 OIL & LUBE MULTI-WRENCHES

Fits most oil drain, transfer case, and differential plugs. Features offset head w/ yoke support for high torque applications, indexing feature to lock socket into position, nickle plating and magnet built into handle. OAL: 10-1/2" (27cm). Hang-tab packaging. Order without 'K' suffix for hanging card packaging.

No.	Description	Size
2495K	6-point Metric	12, 13, 14, 15, 16, 17, 18 & 19mm
2497K	Male Square & Hex	Square: 8mm, 10mm, 3/8" & 1/2" Hex: 10, 12, 14 & 17mm

