


With Dynabrade's Exclusive Single-Piece Hub Design!

- Exclusive single-piece hub design reduces pad vibration and ensures smooth performance.
- PREMIUM URETHANE Sanding Pads are perfectly weight-mated to Dynabrade tools, for achieving consistent **swirl-free finishes**.

Ask for the **ORANGE!**



Vinyl-Face Pads

Ideal for PSA-type disc adhesion. Remove abrasive adhesive paper liner and press abrasive to vinyl-face sanding pad. Quick disc removal.



Non-Vacuum Pads

High quality backup pad. Weight-mated for smooth running and minimal tool vibration.



Vacuum Pads

Holes are precisely located to achieve proper alignment with abrasive discs, for optimum vacuum capabilities.



Channel Vacuum Pads

1/8" (3 mm) deep recessed channel. No need to align abrasive holes with pad holes!

AIR TOOL ACCESSORIES

Non-Vacuum Pads

| Pad Diameter | Part Number | Thickness | Density |
|----------------|-------------|--------------|------------|
| 3" (76 mm) | 56084 | 5/8" (16 mm) | Medium |
| | 56086 | 5/8" (16 mm) | Soft |
| 3-1/2" (89 mm) | 56097 | 5/8" (16 mm) | Soft |
| | 56098 | 5/8" (16 mm) | Medium |
| 5" (127 mm) | 56102 | 3/8" (10 mm) | Soft |
| | 56106 | 3/8" (10 mm) | Medium |
| | 56175 | 5/8" (16 mm) | Medium |
| | 56185 | 5/8" (16 mm) | Soft |
| | 56273 | 1/2" (13 mm) | Extra Soft |
| 6" (152 mm) | 56103 | 3/8" (10 mm) | Soft |
| | 56107 | 3/8" (10 mm) | Medium |
| | 56177 | 5/8" (16 mm) | Medium |
| 8" (203 mm) | 56187 | 5/8" (16 mm) | Soft |
| | 56234 | 3/8" (10 mm) | Medium |

All Pads: 13,000 RPM maximum operating speed; 5/16"-24 male thread. (8" dia. pad mounts with 5 screws. 10,000 RPM max.)



See Sanding Pad Display Packs on Page 233

Vacuum Pads

| Pad Diameter | Part Number | Holes | Thickness | Density |
|-----------------|-------------|-------|--------------|------------|
| 3" (76 mm)* | 56084 | 0 | 5/8" (16 mm) | Medium |
| | 56086 | 0 | 5/8" (16 mm) | Soft |
| 3-1/2" (89 mm)* | 56097 | 0 | 5/8" (16 mm) | Soft |
| | 56098 | 0 | 5/8" (16 mm) | Medium |
| 5" (127 mm) | 56100 | 5 | 3/8" (10 mm) | Soft |
| | 56104 | 5 | 3/8" (10 mm) | Medium |
| | 56176 | 5 | 5/8" (16 mm) | Medium |
| | 56186 | 5 | 5/8" (16 mm) | Soft |
| | 56241 | 6 | 3/8" (10 mm) | Medium |
| | 56274 | 5 | 1/2" (13 mm) | Extra Soft |
| | 56101 | 6 | 3/8" (10 mm) | Soft |
| 6" (152 mm) | 56105 | 6 | 3/8" (10 mm) | Medium |
| | 56178 | 6 | 5/8" (16 mm) | Medium |
| | 56188 | 6 | 5/8" (16 mm) | Soft |
| | 56235 | 5 | 3/8" (10 mm) | Medium |

All Pads: 13,000 RPM maximum operating speed; 5/16"-24 male thread. (8" dia. pad mounts with 5 screws. 10,000 RPM max.)

*NOTE: Our 3" (76 mm) and 3-1/2" (89 mm) pads, without holes, can be used for vacuum sanding. Vacuum pick-up is around periphery of pad.

Exclusive Single-Piece Hub Design

- All Dynabrade Sanding Pads feature our exclusive single-piece hub design, which reduces pad vibration and ensures smooth performance!
- Competitive pads have a hub assembled from three separate pieces, which can contribute to pad "wobbling" and uneven sanding – meaning lost time and lost profits!
- "Face Run-Out" of Dynabrade Pads measures only .002 - .005. Competitive pads measure as high as .015 - .040!



Channel Vacuum Pads


| Pad Diameter | Part Number | Holes | Thickness | Density |
|--------------|-------------|-------|--------------|---------|
| 5" (127 mm) | 56251 | 5 | 3/8" (10 mm) | Soft |
| | 56252 | 5 | 3/8" (10 mm) | Medium |
| | 56254 | 5 | 5/8" (16 mm) | Medium |
| | 56256 | 5 | 5/8" (16 mm) | Soft |
| 6" (152 mm) | 56261 | 6 | 3/8" (10 mm) | Soft |
| | 56262 | 6 | 3/8" (10 mm) | Medium |
| | 56264 | 6 | 5/8" (16 mm) | Medium |
| | 56266 | 6 | 5/8" (16 mm) | Soft |

ADDITIONAL RANDOM ORBITAL SANDING PADS

Rubber Random Orbital Sanding Pads

Rubber Sanding Pads for the Economy-Minded Professional

12,000 RPM Maximum Operating Speed • 5/16"-24 Male Thread • Medium Density

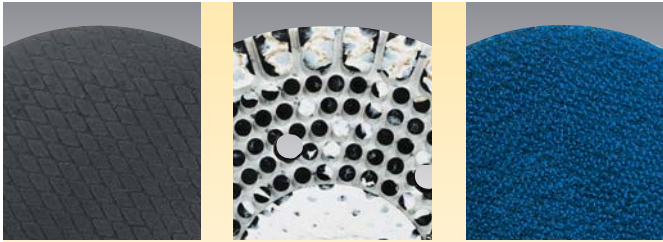

Diamond Pattern

Low-cost alternative to premium urethane pads for the economy-minded professional. Use with PSA-type abrasives.

Post Pattern

Grooves in bottom of pad allow for enhanced vacuum pick-up. No need to align vacuum holes with abrasive holes. Use with PSA-type abrasives.

Long Nap Hook-Face

Use with non-woven nylon discs.

Non-Vacuum Pads

| Pad Diameter | Part Number | Face | Nap | Thickness |
|--------------|-------------|---------|------|--------------|
| 5" (127 mm) | 50630 | Diamond | – | 1/2" (13 mm) |
| | 50605 | Hook | Long | 1/2" (13 mm) |
| 6" (152 mm) | 50632 | Diamond | – | 1/2" (13 mm) |
| | 50606 | Hook | Long | 1/2" (13 mm) |

Vacuum Pads

| Pad Diameter | Part Number | Face | Nap | Holes | Thickness |
|--------------|-------------|--------------|------|-------|--------------|
| 5" (127 mm) | 50631 | Diamond | – | 5 | 1/2" (13 mm) |
| | 50695 | Post Pattern | – | 5 | 1/2" (13 mm) |
| | 50607 | Hook | Long | 5 | 1/2" (13 mm) |
| 6" (152 mm) | 50633 | Diamond | – | 6 | 1/2" (13 mm) |
| | 50696 | Post Pattern | – | 6 | 1/2" (13 mm) |
| | 50610 | Hook | Long | 6 | 1/2" (13 mm) |

Value Pad

Quality Sanding Pad

- Vinyl-face.
- Medium density pad for use with Random Orbital Sanders.
- 5/16"-24 male thread.



Non-Vacuum Pads

| Pad Diameter | Part Number | Thickness | Density |
|--------------|-------------|--------------|---------|
| 5" (127 mm) | 56205 | 3/8" (10 mm) | Medium |
| 6" (152 mm) | 56206 | 3/8" (10 mm) | Medium |

Vacuum Pads

| Pad Diameter | Part Number | Holes | Thickness | Density |
|--------------|-------------|-------|--------------|---------|
| 5" (127 mm) | 56207 | 5 | 3/8" (10 mm) | Medium |
| 6" (152 mm) | 56208 | 6 | 3/8" (10 mm) | Medium |

Display Packs

Display Pads in Refillable Dynabrade Box

- Each display pack consists of ten Dynabrade Random Orbital Sanding Pads.
- Pads fit Dynabrade tools as well as other manufacturers' sanders.



| Pad Diameter | Pack Part No. | Pad Part No. | Vacuum Type | Holes |
|--------------|---------------|--------------|-------------|-------|
| 5" (127 mm) | 95994 | 56106 | Non-Vacuum | 0 |
| | 95995 | 56104 | Vacuum | 5 |
| 6" (152 mm) | 95996 | 56107 | Non-Vacuum | 0 |
| | 95997 | 56105 | Vacuum | 6 |