
## Fluke ac/dc current clamps







i310s, i30s and i30 Hall Effect AC/DC **Current Clamps** Especially useful for low current measurements down to 30 milliamps.

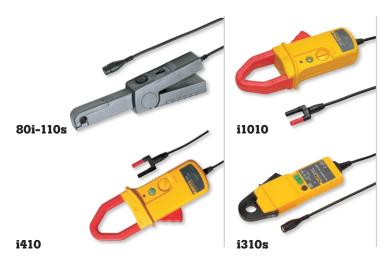

AC/DC current clamp specifications

no/bo turrent clamp specifications										
	80i-110s	i410	i1010	i30	i30s	i310s				
DC range	0.1 A to 100 A	1 A to 400 A	1 A to 1000 A	30 mA to 30 A	30 mA to 30 A	0.1 A to 450 A				
AC range	0.1 A to 70 A	1 A to 400 A	1 A to 600 A	30 mA to 20 A rms	30 mA to 20 A rms	0.1 A to 300 A				
Accuracy	0.1 A to 10 A; dc to 1 kHz: ± 3 % + 50 mA; up to 100 A add 15 %; up to 20 kHz add 12 %	3.5 % + 0.5 A for dc or ac (45 to 400 Hz)	2 % + 0.5 Å for dc or ac (45 to 400 Hz)	$\pm$ 1 % of reading, $\pm$ 2 mÅ	± 1% of reading, ± 2 mA	30 A range: 1 % + 50 mA 300 A range: 1 % + 300 mA				
Bandwidth (-3 dB)	100 kHZ	3 kHz	10 kHz	dc to 20 kHz (-0.5 dB)	dc to 100 kHz (-0.5 dB)	dc to 20 kHz				
Zero error adjustment	•	•	•	•	•	•				
Maximum conductor diameter	11.8 mm (0.46 in)	30 mm (1.18 in)	30 mm (1.18 in)	19 mm (0.75 in)	19 mm (0.75 in)	19 mm (0.75 in)				
Maximum conductor size	35 mm²	1x 400 mm <sup>2</sup> or 2x 240 mm <sup>2</sup>	1x 400 mm <sup>2</sup> or 2x 240 mm <sup>2</sup>	120 mm <sup>2</sup>	120 mm²	120 mm²				
Output levels	10 mV/A, 100 mV/A	1 mV/A	1 mV/A	100 mV/A	100 mV/A	1 mV/A, 10 mV/A				
Output cable	1.6 meter with BNC termination	1.2 meter with shrouded banana plugs	1.2 meter with shrouded banana plugs	1.5 meter with shrouded dual banana plugs	2 meter with BNC termination	2 meters with BNC termination and a BNC to safety shrouded banana adapter				
Battery life	40 hours	60 hours	60 hours	30 hours	30 hours	30 hours				
Warranty	One-year	One-year	One-year	One-year	One-year	One-year				
Safety	CAT II 600 V; CAT III 300 V	CAT III 600 V	CAT III 600 V	CAT III 300 V	CAT III 300 V	CAT III 300 V				

## AC/DC current clamp selection guide

	80i-110s	i410	i1010	i30	i30s	i310s
114/115/116/117	0.1 A to 100 A dc/	1.4 Å to 400 Å dc/	1.4 Å to 1000 Å dc/	30 mÅ to 30 Å dc/	30 mÅ to 30 Å dc/	0.1 A to 450 A dc/
	0.1 A to 70 A ac*	6 Å to 400 Å ac	6 Å to 600 Å ac	60 mÅ to 20 Å ac	60 mÅ to 20 Å ac	0.6 A to 300 A ac
233	0.1 Å to 100 Å dc/	1.4 Å to 400 Å dc/	1.4 Å to 1000 Å dc/	30 mA to 30 A dc/	30 mÅ to 30 Å dc/	0.1 Å to 450 Å dc/
	0.1 Å to 70 Å ac*	6 Å to 400 Å ac	6 Å to 600 Å ac	60 mA to 20 A ac	60 mÅ to 20 Å ac	0.6 Å to 300 Å ac
27II	0.1 A to 100 A dc/	1 A to 400 A dc/	1 A to 1000 A dc/	30 mÅ to 30 Å dc/	30 mÅ to 30 Å dc/	0.1 A to 450 A dc/
	0.1 A to 70 A ac*	1 A to 400 A ac	1 A to 600 A ac	30 mÅ to 20 Å ac	30 mÅ to 20 Å ac	0.1 A to 300 A ac
28II	0.1 A to 100 A dc/	1 A to 400 A dc/	1 A to 1000 A dc/	30 mA to 30 A dc/	30 mÅ to 30 Å dc/	0.1 A to 450 A dc/
	0.2 A to 70 A ac*	6 A to 400 A ac	6 A to 600 A ac	60 mA to 20 A ac	60 mÅ to 20 Å ac	2 A to 300 A ac
77-IV	0.1 A to 100 A dc/	1 A to 400 A dc/	1 A to 1000 A dc/	30 mA to 30 A dc/	30 mA to 30 A dc/	0.1 A to 450 A dc/
	0.1 A to 70 A ac*	5 A to 400 A ac	5 A to 600 A ac	40 mA to 20 A ac	40 mA to 20 A ac	0.4 A to 300 A ac
175/177/179	0.11 Å to 100 Å dc/	1.6 A to 400 A dc/	1.6 A to 1000 A dc/	30 mA to 30 A dc/	30 mÅ to 30 Å dc/	0.1 A to 450 A dc/
	0.3 Å to 70 Å ac*	30 A to 400 A ac	30 A to 600 A ac	300 mA to 20 A ac	300 mÅ to 20 Å ac	3 A to 300 A ac
1577/1587 FC	0.1 A to 100 A dc/	1.2 A to 400 A dc/	1.2 A to 1000 A dc/	30 mA to 30 A dc/	30 mA to 30 A dc/	0.1 A to 450 A dc/
Insulation Meter	0.3 A to 70 A ac*	30 A to 400 A ac	30 A to 600 A ac	300 mA to 20 A ac	300 mA to 20 A ac	3 A to 300 A ac
83V/88V	0.1 A to 100 A dc/	1 A to 400 A dc/	1 A to 1000 A dc/	30 mA to 30 A dc/	30 mA to 30 A dc/	0.1 A to 450 A dc/
	0.1 A to 70 A ac*	1 A to 400 A ac	1 A to 600 A ac	30 mA to 20 A ac	30 mA to 20 A ac	0.1 A to 300 A ac
87V	0.1 A to 100 A dc/	1 A to 400 A dc/	1 A to 1000 A dc/	30 mA to 30 A dc/	30 mA to 30 A dc/	0.1 A to 450 A dc/
	0.2 A to 70 A ac*	20 A to 400 A ac	20 A to 600 A ac	200 mA to 20 A ac	200 mA to 20 A ac	2 A to 300 A ac
287/289	0.1 A to 100 A dc/	1 A to 400 A dc/	1 A to 1000 A dc/	30 mA to 30 A dc/	30 mÅ to 30 Å dc/	0.1 A to 450 A dc/
	0.1 A to 70 A ac*	1 A to 400 A ac	1 A to 600 A ac	30 mA to 20 A ac	30 mÅ to 20 Å ac	0.1 A to 300 A ac
123/124 ScopeMeters	0.1 A to 100 A dc/ 0.25 A to 70 A ac	1 A to 400 A dc/ 25 A to 400 A ac**	1 A to 1000 A dc/ 25 A to 600 A ac**		30 mA to 30 A dc/ 250 mA to 20 A ac	0.1 A to 450 A dc/ 2.5 A to 300 A ac
190 Series ScopeMeters	0.1 A to 100 A dc/	1 A to 400 A dc/	1 A to 1000 A dc/	30 mA to 30 A dc/	30 mA to 30 A dc/	0.1 A to 450 A dc/
	0.1 A to 70 A ac	5 A to 400 A ac**	5 A to 600 A ac**	50 mA to 20 A ac**	50 mA to 20 A ac	0.5 A to 300 A ac
3808A	0.1 A to 100 A dc/	1 A to 400 A dc/	1 A to 1000 A dc/	30 mA to 30 A dc/	30 mA to 30 A dc/	0.1 A to 450 A dc/
	0.1 A to 70 A ac*	2 A to 400 A ac	2 A to 600 A ac	30 mA to 20 A ac	30 mA to 20 A ac	0.2 A to 300 A ac
3845A/8846A	0.1 A to 100 A dc/	1 A to 400 A dc/	1 A to 1000 A dc/	30 mA to 30 A dc/	30 mA to 30 A dc/	0.1 A to 450 A dc/
	0.1 A to 70 A ac*	1 A to 400 A ac	1 A to 600 A ac	30 mA to 20 A ac	30 mA to 20 A ac	0.1 A to 300 A ac
705/707	0.1 Å to 100 Å dc, no ac*	4 A to 400 A dc, no ac	4 A to 1000 A dc, No ac	40 mA to 30 A dc, no ac	40 mA to 30 A dc, no ac	0.4 A to 450 A dc, no ac
715	0.1 Å to 100 Å dc, no ac*	4 A to 400 A dc, no ac	4 A to 1000 A dc, No ac	40 mA to 30 A dc, no ac	40 mA to 30 A dc, no ac	0.1 A to 450 A dc, no ac
787/789 Process Meters	0.1 A to 100 A dc/	1 A to 400 A dc/	1 A to 1000 A dc/	30 mA to 30 A dc/	3 mA to 30 A dc/	0.1 A to 450 A dc/
	0.2 A to 70 A ac*	20 A to 400 A ac	20 A to 600 A ac	200 mA to 20 A ac	200 mA to 20 A ac	2 A to 300 A ac

<sup>\*</sup> Requires PM9081 Adapter \*\* Requires PM9082/001 Adapter