


# Magna-Grip® Data and Tooling

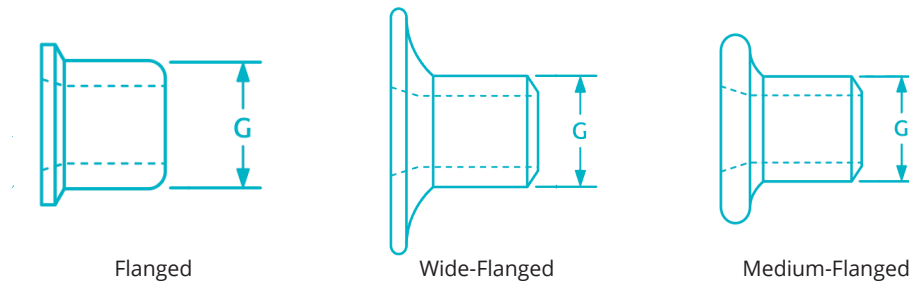


## Collars

	DIAMETER	PART NO.	WIDTH(G)
<b>Steel - Zinc Plated</b>			
Flanged	3/16"	MGC-R6U	.305-.315
	1/4"	MGC-R8U	.395-.405
	5/16"	MGC-R10U	.500-.510
	3/8"	MGC-R12U	.600-.612
Medium Flange	3/16"	MGCS-R6U	.305-.315
Wide Flange	3/16"	MGCW-R6U	.305-.315
	1/4"	MGCW-R8U	.395-.405
<b>Aluminum</b>			
Flanged	3/16"	MGC-F6	.305-.315
	1/4"	MGC-F8	.395-.405
	5/16"	MGC-F10	.500-.510
	3/8"	MGC-F12	.600-.612
Wide Flange	3/16"	MGCW-F6	.305-.315

### Tab-Lok™

The optional Tab-Lok feature makes sure the collar stays on the pin, before installation, in overhead and down slanted pin placements.



## Installation Tooling

DIAMETER	TOOL	NOSE ASSEMBLY	TYPE
3/16"	2025	99-3201	Pneudraulic
	256	99-3206	Pneudraulic
	2480	99-3201	Hydraulic
	2581	99-3206	Hydraulic
	BV4500-118	99-3201	Battery
1/4"	2025	99-3204	Pneudraulic
	256	99-3207	Pneudraulic
	2480	99-3204	Hydraulic
	2581	99-3207	Hydraulic
	BV4500-118	99-3204	Battery
5/16"	256	99-1439	Pneudraulic
	2581	99-1439	Pneudraulic
	2600	99-3217	Pneudraulic
3/8"	256	99-1440	Pneudraulic
	2581	99-1440	Hydraulic
	2600	99-3220	Hydraulic