

# OXYGEN SENSOR TOOLS

3



For 3/8" Ratchet

No. 755

## 2012 TWIN CAM O2 SENSOR WRENCHES

JIMS has just released two new 2012 oxygen sensor wrenches. You must have these to remove or install the O2 sensors without removing the exhaust pipes on the motorcycle. For more details see No. 755-IS & 756-IS Instructions.

No. 755 - Use on 2012 Dyna and V-Rod models also for the 2012 Softail front exhaust pipe sensor.

No. 756 - Use on 2012 Softail rear exhaust pipe sensor.

No. 756




For 3/8" Ratchet



## 14 MM OXYGEN SENSOR WRENCH TOOL

This tool is a must for removing and installing H-D's new 4 wire heated Oxygen Sensors. The new fragile O2 sensor must be torqued to 14 ft-lbs, lending to the design of this tool to be used with a 3/8" drive torque wrench. For more details see No. 784-IS Instructions.

No. 784 - Use on 2010-present FLH, Touring Models

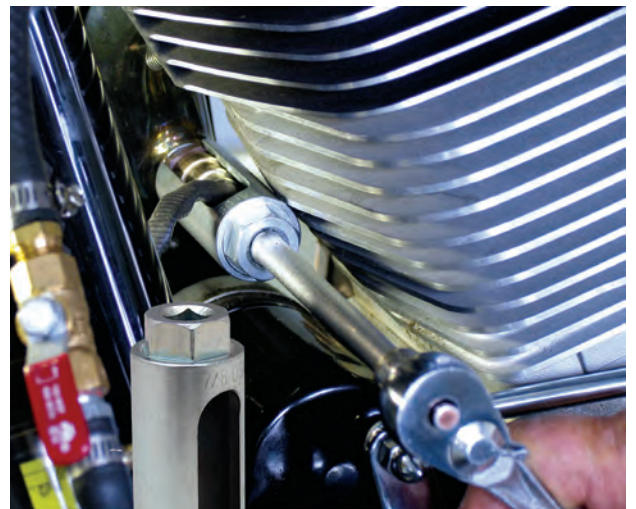

## OXYGEN SENSOR SOCKET TOOL

This tool is used to remove or install the oxygen sensor on all closed loop fuel injected H-D® models. Socket has a 3/8" drive receiver or can be used with a 7/8" wrench. Socket will withstand up to 125 ft/lbs of torque.

No. 969 - Use on 2006-present XL, 2006-2011 VRSC, FXD, and FXST also 2006-2009 FLH and trike.