


28500 STRAP WRENCH

Loosen or Tighten Cylindrical or Rectangular Objects.

Handy, self-tightening strap wrench won't slip. Works great for installing or removing timing belt sprockets or belt pulleys. Range from 1" to 6-5/8" round. Tensile strength of strap is 1350 P.S.I. Handle is made of glass-filled polypropylene which provides superior strength.

28500 Strap Wrench. Skin-packed. Shipping wt. 10 oz.

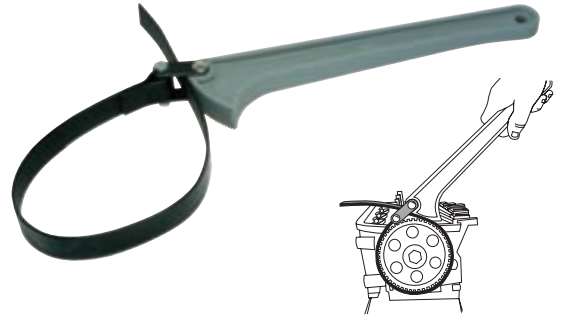

U.S. Pat No. 6,101,903

12290 NOX & SOOT SENSOR SOCKET SET


Designed for Easy Access on NOx and Soot Sensors.

Includes 24mm & 30mm offset sockets with 1/2" drive. Each socket has 6 and 12 point options. Works on 3.0L EcoDiesel V6 engines found in Jeep Grand Cherokee & Dodge Ram 1500 Trucks.

12290 NOx & Soot Sensor Socket Set. Skin-packed. Shipping wt. 1 lb. 5 oz.

12300 NOx Socket, 24mm

12310 NOx Socket, 30mm

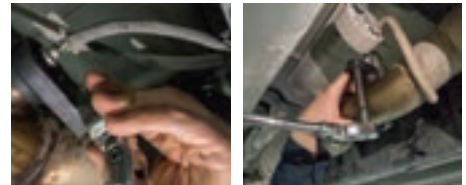

ENGINE

12220 NOX SENSOR THREAD CHASER M20

Cleans Threads in NOx Sensor Holes.

Use with 13/16" hex socket or 3/8" square drive to restore M20x1.5 NOx sensor threads.

12220 NOx Sensor Thread Chaser. Skin-packed. Shipping wt. 3 oz.



12230 OXYGEN SENSOR THREAD CHASER

Cleans Threads in Oxygen Sensor Holes.

Use with 3/4" hex socket or 3/8" square drive. Size: M18x1.5 Also works on M18x1.5 spark plug threads. IMPORTANT: Use anti-seize.

12230 Oxygen Sensor Thread Chaser. Skin-packed. Shipping wt. 3 oz.

