


3/8" Drive Socket Wrenches – Chrome

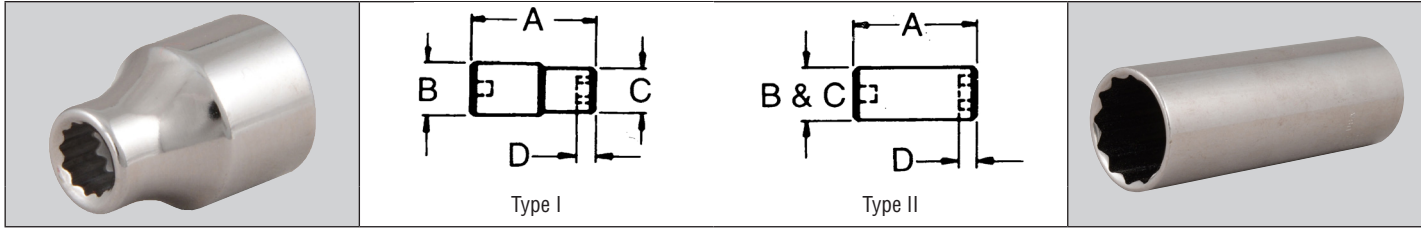


3/8" Square Drive 12 Point Standard

Opening	Type	Length	Drive End	Opening End	Minimum Depth	Weight Each (lb)	Part Number	Std. Pkg. Qty.	Opening
		A	B	C	D		Chrome		
1/4	I	1-1/8	5/8	25/64	1/8	.04	B1208	6	1/4
5/16	I	1-1/8	5/8	15/32	9/64	.05	B1210	6	5/16
3/8	I	1-1/8	5/8	35/64	5/32	.05	B1212	6	3/8
7/16	II	1-1/8	—	5/8	7/32	.05	B1214	6	7/16
1/2	II	1-1/8	—	23/32	17/64	.06	B1216	6	1/2
9/16	II	1-1/8	—	25/32	21/64	.08	B1218	6	9/16
5/8	II	1-1/8	—	7/8	3/8	.10	B1220	6	5/8
11/16	II	1-1/8	—	15/16	3/8	.12	B1222	6	11/16
3/4	II	1-1/8	—	1	7/16	.14	B1224	6	3/4
13/16	II	1-3/16	—	1-1/16	29/64	.15	B1226	6	13/16
7/8	II	1-1/4	—	1-9/64	1/2	.18	B1228	6	7/8
15/16	II	1-9/16	—	1-1/4	35/64	.18	B1230	6	15/16
1	II	1-5/8	—	1-5/16	35/64	.19	B1232	6	1

3/8" Square Drive 12 Point Deep

Opening	Type	Length	Drive End	Opening End	Minimum Depth	Weight Each (lb)	Part Number	Std. Pkg. Qty.	Opening
		A	B	C	D		Chrome		
3/8	I	2-7/32	5/8	35/64	5/32	.10	BD1212	6	3/8
7/16	II	2-7/32	—	5/8	7/32	.10	BD1214	6	7/16
1/2	II	2-7/32	—	23/32	17/64	.15	BD1216	6	1/2
9/16	II	2-7/32	—	25/32	21/64	.19	BD1218	6	9/16
5/8	II	2-7/32	—	7/8	3/8	.23	BD1220	6	5/8
11/16	II	2-1/2	—	59/64	3/8	.28	BD1222	6	11/16
3/4	II	2-1/2	—	63/64	7/16	.26	BD1224	6	3/4
13/16	II	2-25/32	—	1-1/16	29/64	.48	BD1226	6	13/16
7/8	II	2-7/8	—	1-5/32	1/2	.39	BD1228	6	7/8

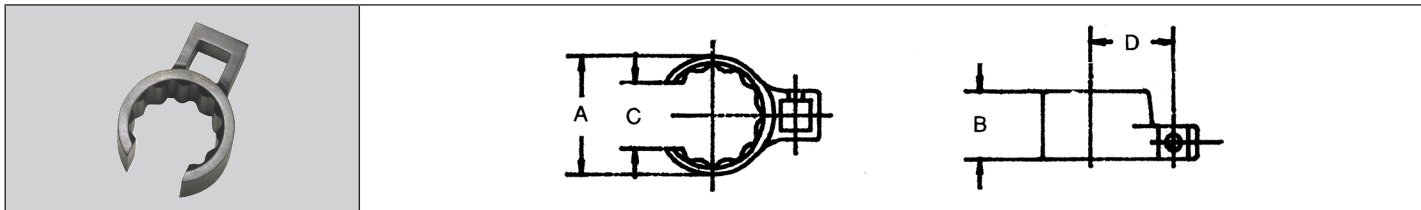

3/8" Drive Crowfoot Wrench — Flare Nut 12 Pt.

Opening	Diameter of Head	Thickness of Head	Width of Slot	Length of Centers	Weight Each (lb)	Part Number		Std. Pkg. Qty.	Opening
	A	B	C	D		Chrome	Industrial Black		
5/8	31/32	11/16	7/16	47/64	.06	BC20	BLKBC20	6	5/8
11/16	1-1/16	11/16	31/64	25/32	.06	BC22	BLKBC22	6	11/16
3/4	1-5/32	23/32	17/32	53/64	.06	BC24	BLKBC24	6	3/4
13/16	1-7/32	23/32	9/16	7/8	.06	BC26	BLKBC26	6	13/16
7/8	1-5/8	3/4	39/64	59/64	.06	BC28	BLKBC28	6	7/8
15/16	1-13/32	3/4	21/32	31/32	.06	BC30	BLKBC30	6	15/16
1	1-31/64	25/32	45/64	1-1/64	.13	BC32	BLKBC32	6	1
1-1/16	1-9/16	25/32	51/64	1-1/16	.13	BC34	BLKBC34	6	1-1/16