

AIR COUPLERS & PLUGS

COUPLER/PLUG STYLES

- Milton® offers 11 different automotive & industrial styles
- Most styles are not interchangeable. However, couplers & plugs within the same style, from most manufacturers, will work together
- Milton®'s "Match-Up System" ensures that all couplers and plugs with the same letter code can be used together regardless of thread size
- Milton®'s 3-way couplers (page 5) simplify the process by working with A, M® & T style plugs
- Milton®'s 5 in ONE™ universal couplers (page 4) are the ultimate in versatility. They securely connect with A, M®, T, V & L style plugs
- Couplers & plugs are not D.O.T. certified

MILTON® INDUSTRIAL PLUG IDENTIFIER

M-Style®
Milton/Industrial Interchange

$.211$ $\frac{1}{4}$ " FLOW SIZE

PAGE 6

V-Style
High Flow/European Interchange

$.185$ $\frac{1}{4}$ " FLOW SIZE

PAGE 9

A-Style
ARO "210" Interchange

$.325$ $\frac{1}{4}$ " FLOW SIZE

PAGE 10

NOTE: PLUG PROFILES ARE ACTUAL SIZE

T-Style
Tru-flate/Parker Interchange

$.085$ $\frac{1}{4}$ " FLOW SIZE

PAGE 11

L-Style
Lincoln Interchange

$.792$ $\frac{1}{4}$ " FLOW SIZE

PAGE 12

D-Style
Diamond-U Interchange

$.170$ $\frac{1}{4}$ " FLOW SIZE

PAGE 12

P-Style
Tru-flate/Parker Interchange

$.128$ $\frac{3}{8}$ " FLOW SIZE

PAGE 13

H-Style
Milton/Industrial Interchange

$.312$ $\frac{3}{8}$ " FLOW SIZE

PAGE 14

AA-Style
ARO "310" Interchange

$.589$ $\frac{3}{8}$ " FLOW SIZE

PAGE 14

G-Style (.125)
Tru-flate/Parker Interchange

$.125$ $\frac{1}{2}$ " FLOW SIZE

PAGE 15

G-Style (.375)
Milton/Industrial Interchange

$.375$ $\frac{1}{2}$ " FLOW SIZE


PAGE 15

WARNING: FOR USE WITH COMPRESSED SHOP AIR ONLY. NOT FOR BREATHABLE AIR USE



AIR HANDLING CAPACITY

- Basic Flow Size defines the air flow capacity
- Please do not confuse Basic Flow Size with Thread Size
- Thread Size is not directly related to air flow capacity in any way

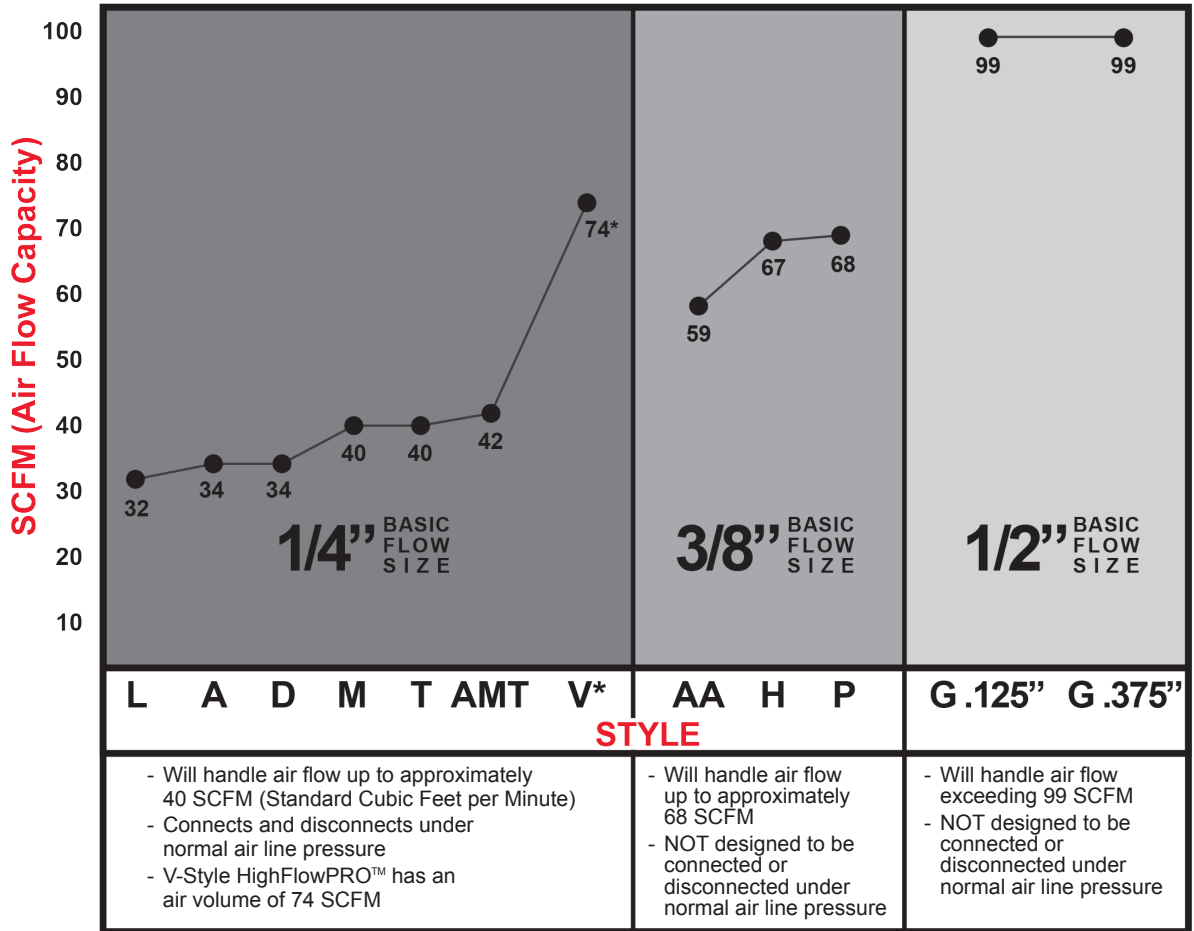

L A D M T AMT V*	AA H P	G.125" G.375"
STYLE		
<ul style="list-style-type: none"> - Will handle air flow up to approximately 40 SCFM (Standard Cubic Feet per Minute) - Connects and disconnects under normal air line pressure - V-Style HighFlowPRO™ has an air volume of 74 SCFM 	<ul style="list-style-type: none"> - Will handle air flow up to approximately 68 SCFM - NOT designed to be connected or disconnected under normal air line pressure 	<ul style="list-style-type: none"> - Will handle air flow exceeding 99 SCFM - NOT designed to be connected or disconnected under normal air line pressure

*Low Pressure, High Volume

DEFINITION OF TERMS

DRAG GUARD



Protects couplers from accidental disconnection

PUSH-TYPE



Eliminates need to retract coupler sleeve to connect. Convenient and time saving option

PUSH-ON & LOCK

Push cut hose onto hose barb. Locks hose in place. Only for use with Push-on & Lock hose on page 24

RE-CAP

Recap plugs screw directly onto tire valves to allow for direct coupler connection and faster pressurization

M-STYLE® INDUSTRIAL INTERCHANGE (cont)

5-pc M-Style® Coupler/Plug Kit w/ Variable Angle Swivel Plug



s-218

- Max inlet pressure: 300 PSI
- Air flow: 40 SCFM

1/4" NPT

s-218		
Part No.	Description	Ref Pg.
1	#715 M-Style® Female Brass Coupler	6
3	#727 M-Style® Male Steel Plugs	6
1	#728 M-Style® Female Steel Plug	6
1	#99681-4 Variable Angle Swivel Plug	24

5-pc M-Style® Safety Coupler/Plug Kit



s-219

- Max inlet pressure: 300 PSI
- Air flow: 40 SCFM

1/4" NPT

s-219		
Part No.	Description	Ref Pg.
3	#727 M-Style® Male Steel Plugs	6
1	#728 M-Style® Female Steel Plug	6
1	#99705 Female Button Safety Coupler	18

16-pc Compressor Accessory Starter Kit



s-220

- Complete starter kit of Milton® accessories needed for a multitude of compressed air functions
- Applications: Inflating and checking tire pressure, inflating sports equipment, blowing debris, mending and connecting hoses, quick connection of air tools
- Ideal for "Do-it-Yourself", small repair shop, mobile repair & maintenance

1/4" NPT

s-220			
Part No.	Description	Size	Ref Pg.
1	#148 Safety Blo Gun w/ Rubber & Venturi Tips	1/4" NPT	32
1	#600 Brass Male Hose End	1/4"NPT Barb x 1/4" Thread	27
1	#640 Brass Male Hose Mender	1/4" NPT x 1/4" NPT	28
1	#643 Brass Female Hex Coupling		28
1	#646 Brass Male Hex Nipple		28
1	#699 Female Single Head Air Chuck		31
2	#715 M-Style® Female Brass Couplers	1/4" NPT	6
3	#727 M-Style® Male Steel Plugs		6
2	#728 M-Style® Female Steel Plugs		6
1	#921 Tire Pressure Gage	5-50 PSI (40-350 kPa)	78
1	#P148-1 Inflator Needle	1/8" NPS	
1	#P148-2 Inflator Needle Adapter		

5-pc M-Style® Coupler/Plug Kit w/ 3-in-1 Manifold



s-221

- Max inlet pressure: 300 PSI
- Air flow: 40 SCFM

1/4" NPT

s-221		
Part No.	Description	Ref Pg.
1	#685-4 3-in-1 Air Manifold - (1)1/4" inlet, (3) 1/4" outlets	30
3	#716 M-Style® Male Brass Couplers	6
1	#727 M-Style® Male Steel Plug	6