

INFLATOR GAGES

COUPLERS
PLUGS
CAM/GROOVE

HOSE
REELS
HOSE FITTINGS

BLO-GUNS

FRLS

PUSH-TO-CONNECT

INFLATOR GAGES

PRESSURE &
SERVICE GAGES

GREASE GUNS

MERCHANDISERS

WINDOW INFLATOR GAGES

Heavy duty construction provides long service life even with constant use. Gage cartridge and valve cartridge replaceable. All window inflator gages equipped with magnifying lens for full view of scale.

- Meets ANSI/ASME B40.1 standards


"The Classic" s-506
The Milton® legacy gage that started it all



Replaceable pressure gage cartridge (Pg. 75)
- ease of field repair



Magnifying lens for full pressure scale view

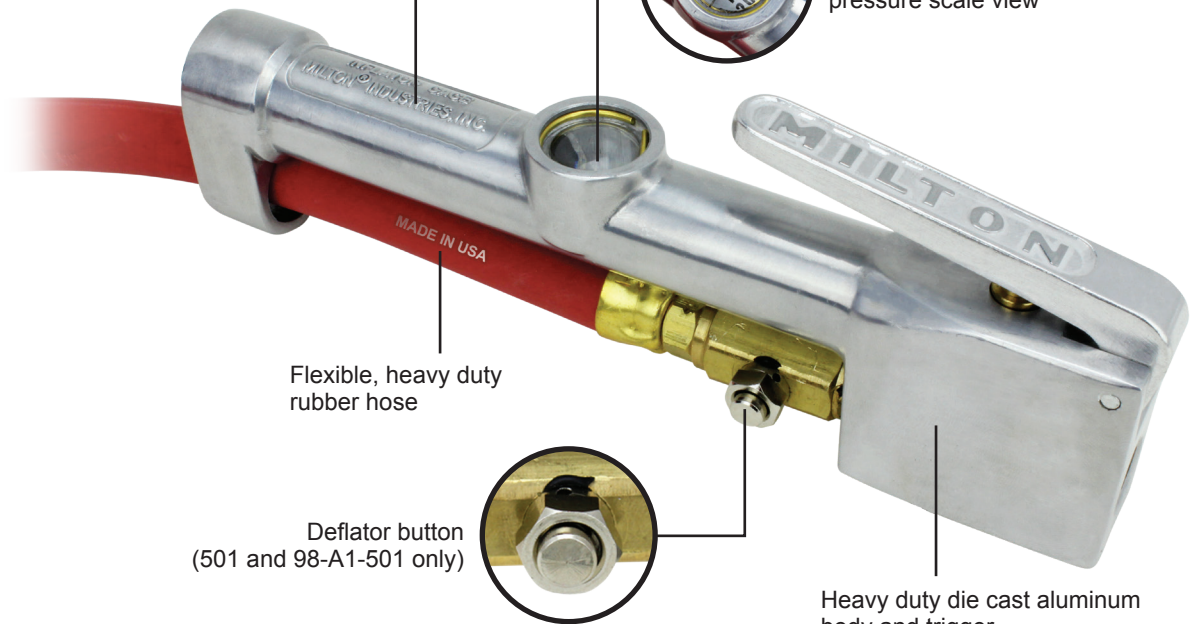


Flexible, heavy duty rubber hose

Deflator button
(501 and 98-A1-501 only)

Heavy duty die cast aluminum body and trigger
- durable, yet lightweight

Part No.	501	98-A1-501	502	503	08-A1-506	s-504	s-505	s-506	s-516	
Hose Length	5'	15'	3'	3'			15"			
OSHA Compliant	YES						No			
Deflator Button	YES						No			
Replacement Hose Whip	514	P98-A1-501	513	511	P08-A1-506	510	508	509	519	
Chuck Style	Dual Head Straight Foot		Kwik Grip Safety Lock-on	Ball Foot w/ Chuck Clip	Dual Foot Large Bore	Straight (for TPMS)	Ball Foot	Dual Head	Dual Head Straight Foot	
Full Swivel	YES	No		YES		No		YES		
Chuck Extension	YES		No		YES	No			YES	
Locking Chuck	Semi-Locking			YES		No			Semi-Locking	

WINDOW INFLATOR GAGES REPLACEMENT HOSE WHIPS



508 509

Part No.	Hose Length	Air Chuck Style		Thread Size	Replacement Hose Whip for
			Full Swivel		
508	15 Inches	Ball Foot	YES	3/8-24	505
509	15 Inches	Dual Head w/ Extension	YES	3/8-24	506
510	15 Inches	Straight	No	3/8-24	504
511	3 Feet	Ball Foot w/ Chuck Clip	YES	3/8-24	503
513	3 Feet	Kwik Grip Safety	No	3/8-24	502
514	5 Feet	Dual Head Straight Foot	YES	3/8-24	501
519	15 Inches	Dual Head Straight Foot	YES	3/8-24	516
P98-A1-501	15 Feet	Dual Head Straight Foot	YES	3/8-24	98-A1-501
P08-A1-506	15 Inches	Dual Head Large Bore	YES	3/8-24	08-A1-506



510 511 513 514 519 P98-A1-501

HEAVY DUTY TRUCK INFLATOR GAGES

- 10-160 PSI (80-840 kPa) pressure range
- For inflating and deflating truck tires



Part No.	Hose Length	Air Chuck Style		Deflator Button	Meets OSHA 1910.177
			Full Swivel		
517	2 Feet	12" Extended Reach Dual Head Straight Foot			No
518	5 Feet	Easy On Grip	YES	YES	YES
550	2 X 7 Feet	12" Extended Reach Dual Head Lock-On + Easy On Grip			
551		2 X 6" Extended Reach Dual Head Lock-On	No	No	
552	50 Feet	12" Extended Reach Dual Head Straight Foot			
553	5 Feet	6" Extended Reach Dual Head Lock-On	YES	YES	
556	6 Feet	Large Bore Secure Lock-On			