


## Caution Mat Pads #YPZ25S-BX - 5 boxes of 25 pads each

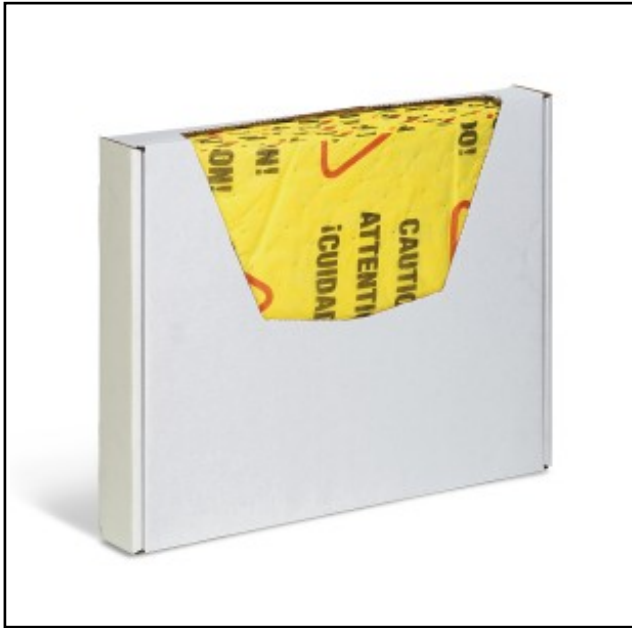

Alert workers to potential safety hazards and work in progress while keeping floors dry.

- High-visibility mat design features multilingual safety messages and symbols to alert workers about potential workplace hazards
- Abrasion-resistant top layer gives pads strength for everyday cleanup jobs
- Universal absorbency means one product for multiple liquids
- Quickly absorbs leaks, spills and overspray to keep floors dry
- Dispenser box makes it easy to carry, store or wall-mount your mat while protecting it from dirt and moisture.

### YPZ25S-BX Specifications

<b>Dimensions:</b>	15" W x 19" L
<b>Shipping Dimensions:</b>	16" W x 21" L x 14" H
<b>Sold as:</b>	125 pads (5 boxes of 25 each)
<b>Color:</b>	Yellow
<b>Composition:</b>	Polypropylene
<b>Absorbency:</b>	Up to 38.9 gal. per case
<b>Absorbency per:</b>	Up to 19.9 oz. per pad
<b>Weight:</b>	14.96 lbs.
<b># per Pallet:</b>	30
<b>Basis Weight:</b>	LightWeight
<b>Incinerable:</b>	Yes
<b>Ship Class:</b>	175

### Metric Equivalent Specifications

<b>Dimensions:</b>	38.1cm W x 48.3cm L
<b>Shipping Dimensions:</b>	40.6cm W x 53.3cm L x 35.6cm H
<b>Absorbency:</b>	Up to 147.2 L per case
<b>Absorbency per:</b>	Up to 588.4 mL per pad
<b>Weight:</b>	6.8 kg

## YPZ25S-BX Technical Information

### Warnings & Restrictions:

There are no known warnings and restrictions for this product.

### Regulations and Compliance:

49 CFR 173.3(c)(2) - The area between a container and a salvage drum used for overpacking must have "sufficient cushioning and absorption material to prevent excessive movement of the damaged package and to eliminate the presence of any free liquid at the time the salvage drum is closed."

40 CFR 263.31 - Transporters, "must clean up any hazardous waste discharge that occurs during transportation...so that the hazardous waste discharge no longer presents a hazard to human health or the environment."

29 CFR 1910.1450(e) - OSHA requires containment and cleanup materials for spills in laboratories to reduce occupational exposure to hazardous chemicals.

29 CFR 1910.120(j)(1) - Under an OSHA requirement, "DOT-specified salvage drums or containers and suitable quantities of proper absorbents shall be kept available and used in areas where spills, leaks, or ruptures may occur."

### Technical Documents:

(Available at [spilltech.com](http://spilltech.com))

Product Data Sheet (PDS)

Safety Data Sheet (SDS)

Chemical Compatibility (CCG)



**SpillTech**

Online:  
[spilltech.com](http://spilltech.com)

Phone:  
**1-800-228-3877 (N.Am.)**  
**1-770-475-3877 (Other)**

Fax:  
**1-800-872-3764 (N.Am.)**  
**1-770-410-1812 (Other)**

Email:  
[sales@spilltech.com](mailto:sales@spilltech.com)