

### D3. Declaration of Conformity

#### Declaration of Conformity to ANSI/ISEA 107-2015, High-Visibility Safety Apparel

Certificate Number: J53122-2015

Company Name: Tingley Rubber Corporation

Address: 1551 S. Washington Ave Suite 403 Piscataway NJ 08854

Product Description: Comfort-Brite Jacket, Fluorescent Yellow-Green

Model Number: J53122

Company declares that the above product meets all set requirements as stated in ANSI/ISEA 107-2015 as a compliant high-visibility safety item for Type R Performance Class 3. All relevant materials have been tested with documents referenced under this certificate number. This item meets all design requirements and has been measured for appropriate amount of visible reflective material and background materials for the smallest size offered for this product.

#### 1. VISIBLE BACKGROUND MATERIAL:

- Amount of visible background material (smallest size offered): >.80m<sup>2</sup> (1240 in.<sup>2</sup>)

Please list each material that contributes towards the amount **VISIBLE BACKGROUND MATERIAL** listed above.

#### Material 1 Test Data

Test Lab: Vartest Labs	Material Type: <input type="checkbox"/> Knitted <input checked="" type="checkbox"/> Woven <input type="checkbox"/> Other:	
Report #: TINGLE.020416J	Material Content (such as Polyester, Modacrylic, and others): FR PVC on Polyester	
Date: 6/17/16	Weight: 10.5 oz	Color: Fl. Yellow-Green
Description: Exterior coated 2 ply FR PVC on 150D Woven Polyester		

#### Material 2 Test Data

Test Lab:	Material Type: <input type="checkbox"/> Knitted <input type="checkbox"/> Woven <input type="checkbox"/> Other:	
Report #:	Material Content (such as Polyester, Modacrylic, and others):	
Date:	Weight:	Color:
Description:		

#### Material 3 Test Data

Test Lab:	Material Type: <input type="checkbox"/> Knitted <input type="checkbox"/> Woven <input type="checkbox"/> Other:	
Report #:	Material Content (such as Polyester, Modacrylic, and others):	
Date:	Weight:	Color:
Description:		

*\*Use separate sheet for additional materials*

**Declaration of Conformity (page 2 of 2)**

**2. VISIBLE RETROREFLECTIVE MATERIAL**

- Amount of visible retroreflective material (smallest size offered) .20m<sup>2</sup> (310 in.<sup>2</sup>)

Please list each type of material that contributes towards **VISIBLE RETROREFLECTIVE MATERIAL** listed above.

**Material 1 Test Data**

Test Lab: Calcoast – Test Report# 150123-02A	
Date: 2/20/2015	Style #: VSF621A
Description: 50mm wide heat seal silver reflective trim	

**Material 2 Test Data**

Test Lab:	
Date:	Style #:
Description:	

*\*Use separate sheet for additional materials*

The undersigned hereby warrants that he/she is authorized to legally bind the company identified above.

Signed: \_\_\_\_\_ Title: \_\_\_\_\_

Print Name: \_\_\_\_\_ Date: \_\_\_\_\_

**Third Party Certification**  
**(ANSI/ISEA 107-2015)**  
**HIGH VISIBILITY COMPLIANCE CERTIFICATE**

---

Submitted by: Tingley Rubber Corporation  
Name: ComfortBrite  
Color Hi Vis Fluorescent Yellow Green

Date: February 23, 2016


Report #: TINGLE.A020416J

The submitted fabric **MEETS** the requirements of ANSI/ISEA 107-2015 specification for the tests conducted in this report covering high visibility background material.

All of the above tests and evaluations were performed in accordance with ISO/IEC 17025 Quality Systems.

This certification applies to the background material only.

Certificate authorized by:



Adam R. Varley  
Technical Director



Serial 60085020416J.TINGLE

---

\*This certification applies to the particular sample tested and to the specific tests carried out as dated and detailed in the report referenced above. It does not signify any measure of approval, control, supervision, or surveillance by Vartest Laboratories Inc. to this or any related product.

## ISO/IEC 17025 Certified Third Party Test Report

**DATE:** February 26, 2016

**FILE:** TINGLE.A020416J  
**PO #:** 17125

**CLIENT:** Tingley Rubber Corporation  
1551 S Washington Ave, Suite 403  
Piscataway, NJ 08854

**ATTN:** Erika Puello

**SAMPLE IDENTIFIED BY CLIENT AS:**

Fabric Submitted  
Per ANSI/ISEA 107-2015 Specification  
Name: ComfortBrite  
Color Hi Vis Fluorescent Yellow Green

**EXECUTIVE SUMMARY:**

PASS

FAIL

X

The submitted fabric **MEETS** the requirements of ANSI/ISEA 107-2015 Specification for the applicable tests conducted in this report covering high visibility background material.

**REQUIRED TESTS:**

Test/Method	Section	ANSI/ISEA 107 REQUIREMENTS	TEST RESULT	PASS/FAIL/NA
Determination of Color ASTM E1164-12 (Single layer)	8.1.1 8.2.4 10.2	Test specimen must fulfill the colorimetric requirements of Table 3 for background material	As submitted: x = y = % Y =	N/A
			After 40x Xenon x = y = % Y =	N/A
Determination of Color ASTM E1164-12 (Two layers of the same material)	8.1.1 8.2.4 10.2	Test specimen must fulfill the colorimetric requirements of Table 3 for background material	As submitted: x = 0.386 y = 0.549 % Y = 111.17	PASS
			After 40x Xenon x = 0.360 y = 0.491 % Y = 93.32	PASS
Colorfastness Crocking AATCC 8-2013	8.2.1	Wet 3.0 Dry 3.0	Wet: 5.0 Dry: 5.0	PASS PASS
Colorfastness Perspiration AATCC 15-2013	8.2.2	Shade change 4.0 Staining 3.0	Shade Change: 4.5 Acetate: 5.0 Cotton: 5.0 Nylon: 5.0 Polyester: 5.0 Acrylic: 5.0 Wool: 5.0	PASS PASS

## ISO/IEC 17025 Certified Third Party Test Report

FILE: TINGLE.A020416J

PO #: 17125

**SAMPLE IDENTIFIED BY CLIENT AS:**

Fabric Submitted  
Per ANSI/ISEA 107-2015 Specification  
Name: ComfortBrite  
Color Hi Vis Fluorescent Yellow Green

**REQUIRED TESTS (Cont.):**

Test/Method	Section	ANSI/ISEA 107 REQUIREMENTS	TEST RESULT	PASS/FAIL/NA
Bursting Strength (Knitted or Other Nonwovens) ASTM D6797-07 (2011)	8.4.1	267 N (60 lbf) (27.2fkg)		N/A
Tear Resistance (Woven) ASTM D1424-09 (2013)	8.4.2	13 N (1326 gf) (2.92 lbf) Avg. force machine Avg. force cross-machine	4.28 lbs average 3.28 lbs average	PASS PASS

**TESTED AS CARE LABEL DICTATES:**

Test/Method	Section	ANSI/ISEA 107 REQUIREMENTS	TEST RESULT	PASS/FAIL/NA
Colorfastness Domestic Laundry AATCC 61-2013-2A 105°F (Modified)	8.2.3 Table 4	Shade Change 4.5 Staining 3.0	Shade Change: 4.5 Acetate: 5.0 Cotton: 5.0 Nylon: 5.0 Polyester: 5.0 Acrylic: 5.0 Wool: 5.0	PASS PASS
Colorfastness Commercial Laundry AATCC 61-2013-3A 145°F (Modified)	8.2.3 Table 4	Shade Change 4.5 Staining 3.0	Shade Change: Acetate: Cotton: Nylon: Polyester: Acrylic: Wool:	N/A N/A
Colorfastness Water AATCC 107-2013	8.2.3 Table 4	Shade Change 3.0 3.0	Shade Change: 5.0 Acetate: 5.0 Cotton: 5.0 Nylon: 5.0 Polyester: 5.0 Acrylic: 5.0 Wool: 5.0	PASS PASS
Colorfastness Hypochlorite Bleaching AATCC 61-2013-4A (Commercial)	8.2.3 Table 4	Fading 4.0		N/A
Colorfastness Hypochlorite Bleaching AATCC 61-2013-5A (Domestic)	8.2.3 Table 4	Fading 4.0		N/A

## ISO/IEC 17025 Certified Third Party Test Report

FILE: TINGLE.A020416J

PO #: 17125

**SAMPLE IDENTIFIED BY CLIENT AS:**

Fabric Submitted  
Per ANSI/ISEA 107-2015 Specification  
Name: ComfortBrite  
Color Hi Vis Fluorescent Yellow Green

**TESTED AS CARE LABEL DICTATES:**

Test/Method	Section	ANSI/ISEA 107 REQUIREMENTS	TEST RESULT	PASS/FAIL/NA
Colorfastness Hot-pressing AATCC 133-2013	8.2.3 Table 4	Shade Change: 4.5 Staining: 3.0	230°F Shade Change: Staining:	N/A
			300°F Shade Change: Staining:	N/A
			390°F Shade Change: Staining:	N/A
Colorfastness Dry Cleaning AATCC 132-2013	8.2.3 Table 4	Shade Change 4.0		N/A
Dimensional change Domestic AATCC 135-2012 (3)IIIA(ii) @ 105°F	8.3.1	Woven L +/- 4%    W +/-2%	5th Cycle Length= -2.3% Width = -0.8%	PASS
		Knit or Coated, Non-Woven	5th Cycle Length= Width =	N/A

**TESTED AS CARE LABEL DICTATES (cont.):**

Test/Method	Section	ANSI/ISEA 107 REQUIREMENTS	TEST RESULT	PASS/FAIL/NA
Dimensional change Commercial AATCC 96-2012 IIIC-A and/or E@145°F	8.3.1	Woven L +/- 4%    W +/-2%	5th Cycle Length= Width =	N/A
		Knit or Coated, Non-Woven L +/- 7%    W +/-5%	5th Cycle Length= Width =	N/A
Dimensional change Drycleaning AATCC 158-2011	8.3.1	Woven L +/- 4%    W +/-2%	5th Cycle Length= Width =	N/A
		Knit or Coated, Non-Woven L +/- 7%    W +/-5%	5th Cycle Length= Width =	N/A

**ISO/IEC 17025 Certified Third Party Test Report**

FILE: TINGLE.A020416J  
PO #: 17125

**SAMPLE IDENTIFIED BY CLIENT AS:**

Fabric Submitted  
Per ANSI/ISEA 107-2015 Specification  
Name: ComfortBrite  
Color Hi Vis Fluorescent Yellow Green

**TESTED AS CARE LABEL DICTATES (cont.):**

Test/Method	Section	ANSI/ISEA 107 REQUIREMENTS	TEST RESULT	PASS/FAIL/NA
Water Repellency AATCC 22-2010	8.5.1	90 New 70 After 5X Launderings	New: After:	N/A N/A
Water Resistance AATCC 35-2013	8.5.2	≤ 1 g of water penetration Level 1	New: After 5X Launderings:	N/A N/A
Waterproof AATCC 127-2013	8.5.3	200 cm New 200 cm After 5X Launderings	New: After:	N/A N/A
Breathability ASTM E96-2013 Procedure B or BW	8.6	Procedure B: 600 g/m <sup>2</sup> /24 hr microporous		N/A
		Procedure BW: 3600 g/m <sup>2</sup> /24 hr hydrophilic		N/A

Signed For The Company By

Adam R. Varley  
Technical Director


JG/02/209




*Stacy Sadowy*

Stacy Sadowy  
Quality Assurance Supervisor

**Chromaticity Coordinates**  
**TINGLE.A.020416J**  
**Fluorescent Yellow-Green**  
**ANSI 107-2015 Requirement:  $Y \geq 70$**   
**Test Performed with Double Layers of Fabric**

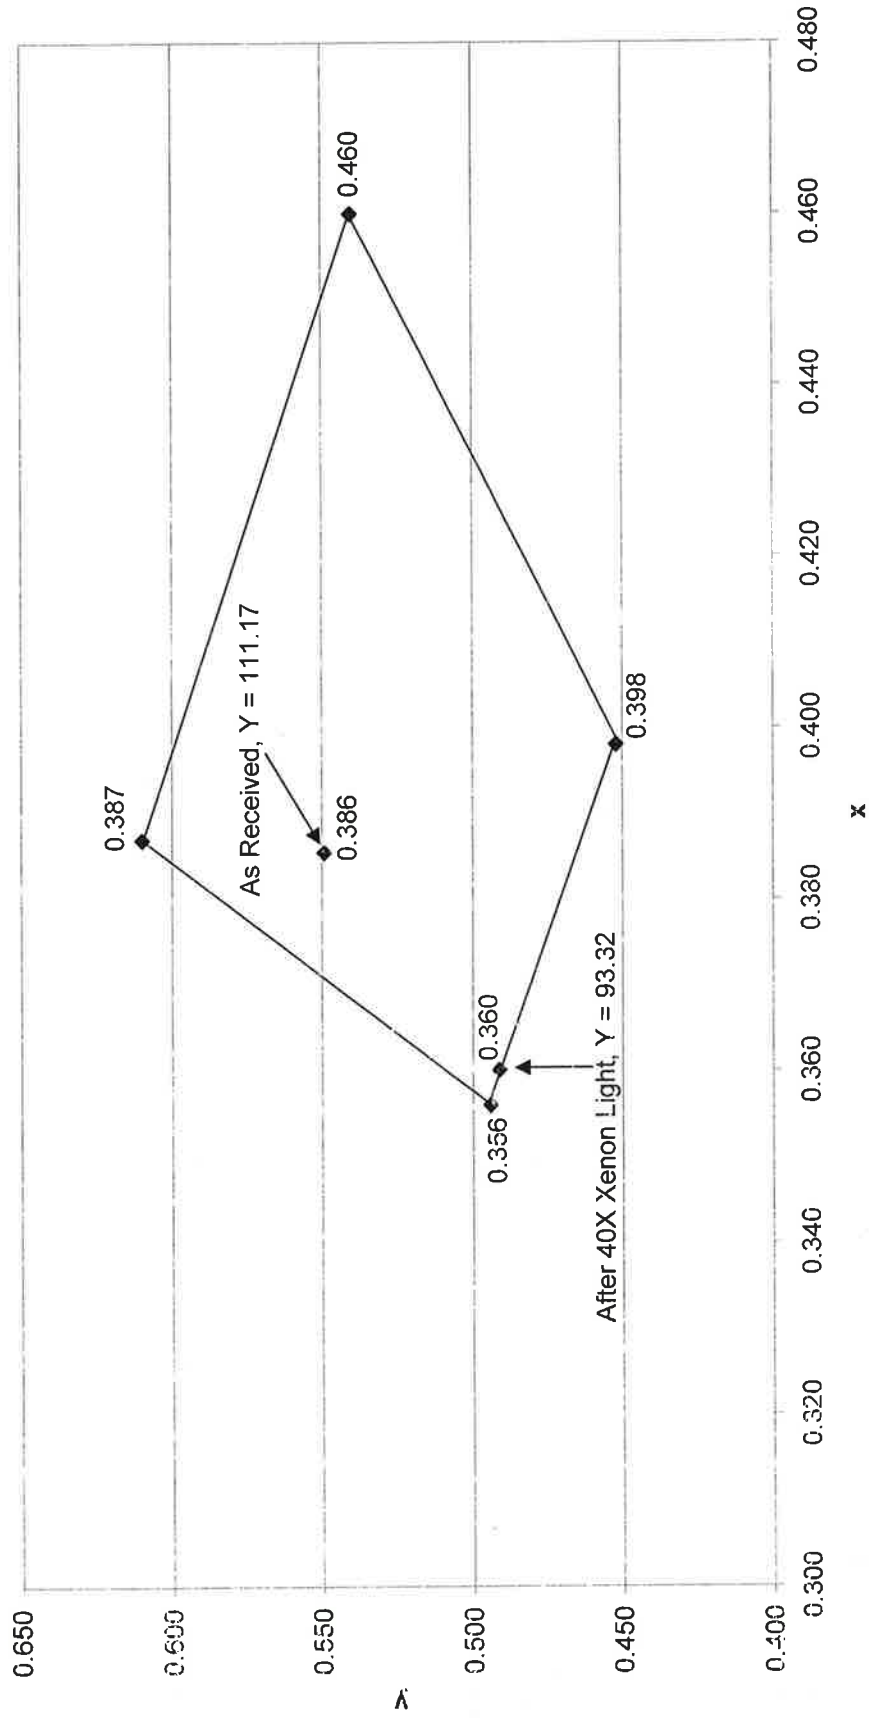



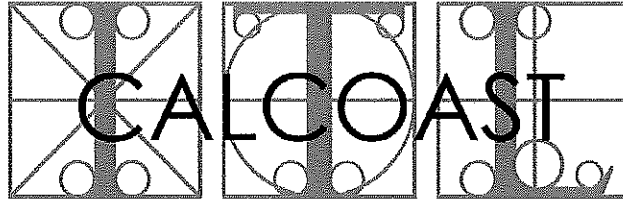

INDUSTRIAL TESTING LABORATORY

CERTIFICATE OF COMPLIANCE

Based on Report No. 150123-02A
Report Date: 20 February 2015
Project Name: Tingley N-FR Heat Seal Manunite VSF621A.05 500 CPL Silver Non-stretch Retroreflective Trim applied to Fl. Orange Background Fabric
Submitted by: Tingley Rubber Corporation South Plainfield, NJ 07080
Test Laboratory: Calcoast - ITL San Leandro, CA 94577
Product: 50 mm (2") wide retroreflective trim applied to Fl. Orange Background Fabric, submitted 23 Jan 2015

SUMMARY

Specification: ANSI/ISEA 107-2010
American National Standard for High-Visibility Safety Apparel
Retroreflective Material, Level 1 or 2

Color
Prior to Exposure..... Not Applicable
Colorfastness..... Not Applicable
Photometric Performance, Initial
Level 2..... Passed
Level 1..... Passed
Retroreflection after Test Exposure
Abrasion..... Passed
Flexing..... Passed
Folding at Cold Temperatures..... Passed
Exposure to Temperature Variation..... Passed
Washing (25X)..... Passed
Dry-cleaning (OX)..... Not Tested
Retroreflective Performance in Rainfall..... Passed
Flame Resistance..... Not Tested

Written by:
Douglas G. Cummins
Photometric Engineer

Approved by:
Mark A. Evans
Laboratory Director

This document may not be reproduced except in its entirety without the expressed consent of Calcoast - ITL.

Based on Report No. 150123-03A

**PHOTOGRAPH SHEET**

Project Name: Tingley N-FR Heat Seal Manunite VSF621A.05 500 CPL  
Silver Non-stretch Retroreflective Trim applied to  
Fl. Orange Background Fabric

