

QUIET ONE PRO SERIES AQUARIUM PUMPS



For Submersible or Dry Applications

FEATURES:

- ◆ Extremely quiet operation... so quiet you'll swear it's not running.
- ◆ Safe for Salt or Freshwater applications.
- ◆ Use with all types of filters.
- ◆ ECO-SAV™ generates more power with less energy consumption.
- ◆ Internal recirculation prevents overheating and ejects obstructing debris.
- ◆ Remarkable impeller technology provides combined rotors, improved shaft materials and corrosion resistant bearings.
- ◆ EZ Access Covers allow ease of maintenance of rotor, shaft and removable impellers.
- ◆ Innovative "cooling chambers" provide air-cooling during dry use and water-cooling in wet applications.
- ◆ Pre-filter Grill with Flow Control Valve in submersible applications.
- ◆ 115 Volt/60 Hz 220 Volt/50 Hz models available.




MODEL 200

Part No. **R440464**
 Model 200
 GPH 87
 Max Ht. Ft. 1.8
 Watt 2.9
 Amp 0.047
 Suction Screen
 Discharge 1/2" Tube
 120 Volt/60 Hz



MODEL 400


Part No. **R440465**
 Model 400
 GPH 103
 Max Ht. Ft. 2.1
 Watt 3.5
 Amp 0.047
 Suction Screen
 Discharge 1/2" Tube
 120 Volt/60 Hz

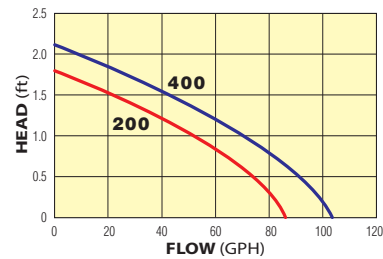

MODEL 800

Part No. **R440101**
 Model 800
 GPH 240
 Max Ht. Ft. 4.8
 Watt 10
 Amp 0.24
 Suction Screen
 Discharge 1/2" Tube
 120 Volt/60 Hz


FLOW RATE (gph)	HEAD (ft)
240	0.0
219	0.8
196	1.5
151	2.5
100	3.3
59	3.9
0	4.8



MODEL 1200

Part No. **R440102**
 Model 1200
 GPH 317
 Max Ht. Ft. 7.0
 Watt 17.5
 Amp 0.40
 Suction 1/2" MPT
 Discharge 1/2" MPT
 120 Volt/60 Hz


Flow Rate (gph)	Head (ft)
317	0.0
288	0.8
258	1.6
196	3.3
120	4.9
55	6.0
0	7.0



MODEL 4000

Part No. **R440104**
 Model 4000
 GPH 1022
 Max Ht. Ft. 10.2
 Watt 58
 Amp 0.60
 Suction 1" MPT
 Discharge 1" MPT
 120 Volt/60 Hz


HEAD (ft)	FLOWRATE (gph)
0.0	1022
0.8	938
1.6	859
3.3	713
4.9	587
6.6	420
8.2	254
9.8	53
10.2	0

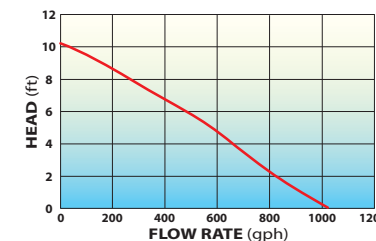

MODEL 2200

Part No. **R440110**
 Model 2200
 GPH 594
 Max Ht. Ft. 10.7
 Watt 38
 Amp 0.46
 Suction 1" MPT
 Discharge 1" MPT
 120 Volt/60 Hz


HEAD (ft)	FLOWRATE (gph)
0.0	594
0.8	544
1.6	505
3.3	436
4.9	367
6.6	296
8.2	206
9.5	102
10.7	0

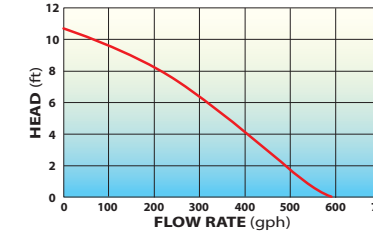

MODEL 5000

Part No. **R440106**
 Model 5000
 GPH 1458
 Max Ht. Ft. 11.8
 Watt 123
 Amp 1.20
 Suction 1" MPT
 Discharge 1" MPT
 120 Volt/60 Hz


HEAD (ft)	FLOWRATE (gph)
0.0	1458
0.3	1440
1.6	1347
3.3	1213
4.9	1070
6.6	925
8.2	769
9.8	555
10.7	420
11.8	0

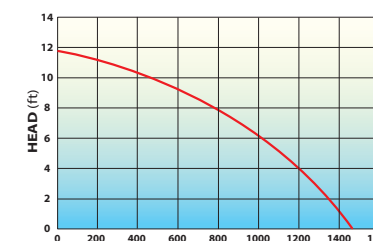

MODEL 3000

Part No. **R440103**
 Model 3000
 GPH 758
 Max Ht. Ft. 10.3
 Watt 49
 Amp 0.54
 Suction 1" MPT
 Discharge 1" MPT
 120 Volt/60 Hz

HEAD (ft)	FLOWRATE (gph)
0.0	758
0.7	721
1.3	690
3.3	587
4.9	496
6.6	380
8.2	245
9.8	92
10.3	0

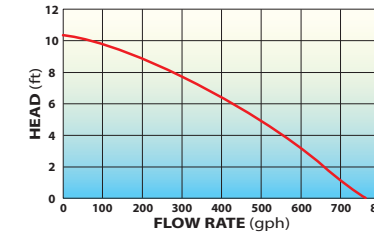

MODEL 6000

Part No. **R440107**
 Model 6000
 GPH 1876
 Max Ht. Ft. 12.0
 Watt 155
 Amp 1.50
 Suction 1" MPT
 Discharge 1" MPT
 120 Volt/60 Hz

HEAD (ft)	FLOWRATE (gph)
0.0	1876
0.8	1797
1.6	1704
3.3	1532
4.9	1361
6.6	1149
8.2	938
9.8	587
11.5	127
12.0	0

