
Measuring Guide: Fixed Awnings Charleston, Dallas Retro, New Yorker, San Francisco, Santa Fe, Savannah



Valance Height (Included in awning measurements) Residential = 6" & 7" Commercial = 8" & 10"

- ☐ F- 4" minimum mounting space required above window or in-swinging door
- □ A-
- o" maximum drop over out-swinging door (for awnings less than 3' deep).
- Except for entries with out-swinging doors, the drop is a personal preference. Hint: the greater the drop = more energy savings but less interior light.
- ☐ C- For entries with low overhead clearance (low roof lines) please see items designated "Low Roof Line Entry Awning"
- □ D- Every awning is 4.5" wider than the window/door size it is representing (B). This is for mounting purposes. (example: 3' San Francisco is actually 40.5" wide)
- □ **G**-Valance height (residential= 6" 7"/ Commercial= 8"/10")
- E- height measurements Include valance in the measurements for all awnings.

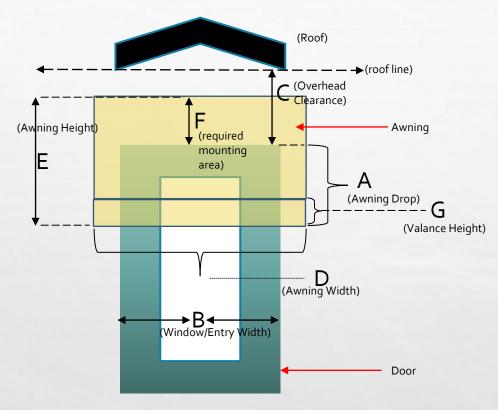