


REV.	DESCRIPTION	DATE
A		
B		02-2006



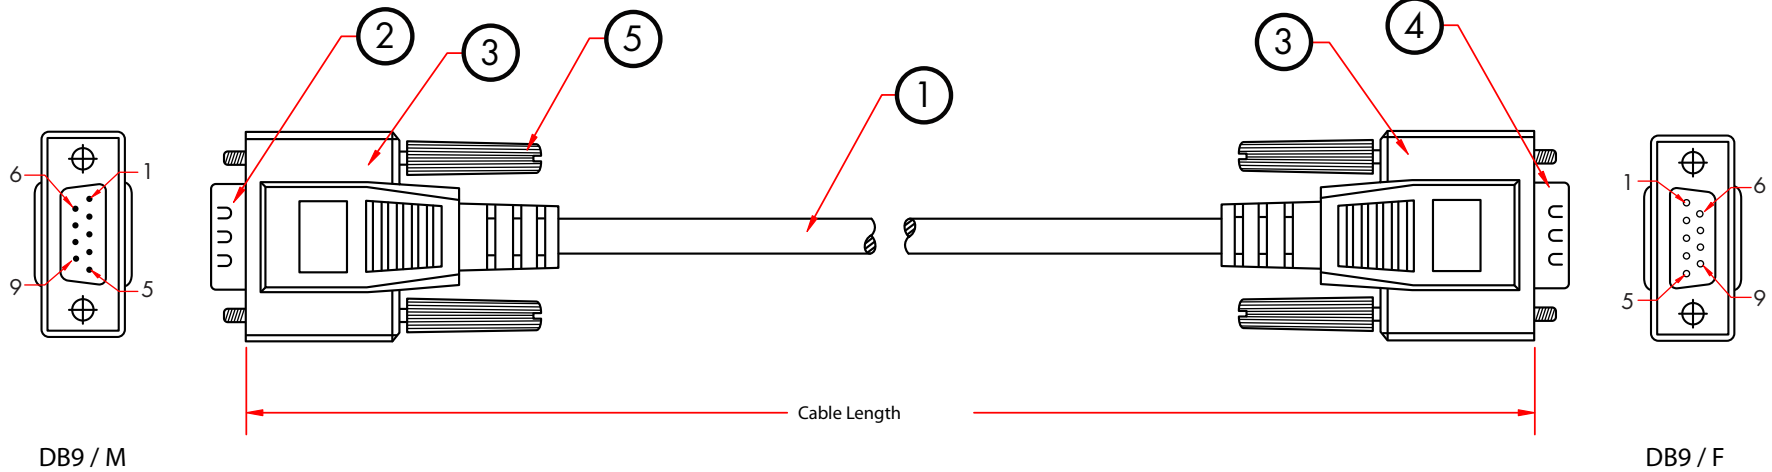


Pin Assignment			
DB9 Male		DB9 Female	
1	—————	1	Brown
2	—————	2	Red
3	—————	3	Orange
4	—————	4	Yellow
5	—————	5	Green
6	—————	6	Blue
7	—————	7	Purple
8	—————	8	Gray
9	—————	9	Black
G	—————	G	

RoHS
Compliant

PART NO.	CABLE LENGTH
10D1-03206BK	6 ft
10D1-03210BK	10 ft
10D1-03250BK	50 ft

NO.	SPECIFICATIONS
5	4-40 Molded Thumb Screw, Black
4	DB9 Female W/Gold Plating Contacts
3	Black Molded PVC Hood, Fully Shielded w/AL-Foil
2	DB9 Male W/Gold Plating Contacts
1	9C (28AWG/7*0.12) + Drain (26AWG/7*0.16) Wire, Single Shield w/AL-Foil, Black Outer PVC Jacket UL2464 Equivalent

ITEM NUMBER	10D1-032xxBK		DRAWER	MPD
TITLE	DB9 Male / DB9 Female, 1:1, Black Serial Cable		CHECKED	MAC
MATERIAL	SCALE		APPROVED	MAC
REV.	A	UNIT	INCH	 
DRAWING NO:				

BOM LIST	