


REV.	DESCRIPTION	DATE
A		
B		02-2006

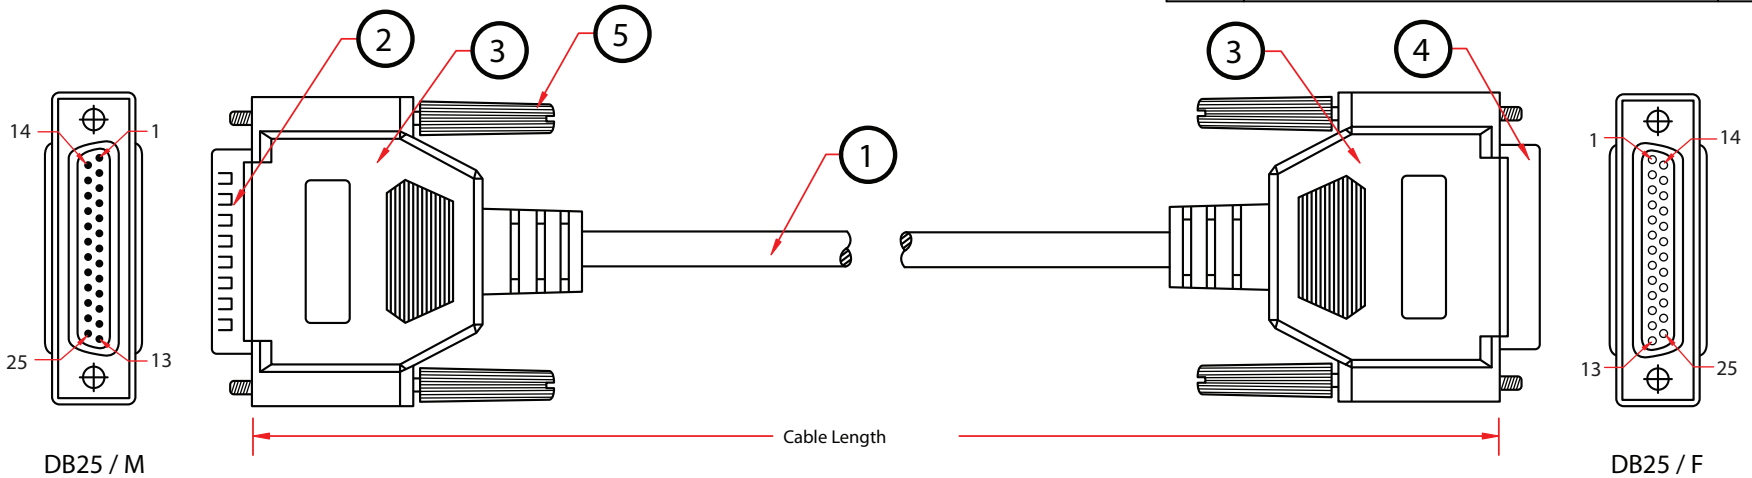

Pin Assignment					
DB25 Male	DB25 Female		DB25 Male	DB25 Female	
1	1	Brown	14	14	Brown / Black
2	2	Red	15	15	Red / Black
3	3	Orange	16	16	Orange / Black
4	4	Pink	17	17	Pink / Black
5	5	Yellow	18	18	Yellow / Black
6	6	Green	19	19	Green / Black
7	7	Light Green	20	20	Light Green / Black
8	8	Blue	21	21	Blue / Black
9	9	Light Blue	22	22	Light Blue / Black
10	10	Purple	23	23	Purple / Black
11	11	Gray	24	24	Gray / Black
12	12	White	25	25	White / Black
13	13	Black	G	G	

RoHS
Compliant

PART NO.	CABLE LENGTH
10D3-01203	3 ft
10D3-01206	6 ft
10D3-01210	10 ft
10D3-01215	15 ft
10D3-01225	25 ft
10D3-01250	50 ft
10D3-012HD	100 ft

5	4-40 Molded Thumb Screw, Beige	ITEM NUMBER	10D3-012xx		DRAWER	MPD
4	DB25 Female W/Gold Plating Contacts	TITLE	DB25 Male / DB25 Female, 1:1 Serial Cable		CHECKED	MAC
3	Beige Molded PVC Hood, Fully Shielded w/AL-Foil	MATERIAL		SCALE	APPROVED	MAC
2	DB25 Male W/Gold Plating Contacts	REV.	A	UNIT		
1	25C (28AWG/7*0.12) + Drain (26AWG/7*0.16) Wire, Single Shield w/AL-Foil, Beige Outer PVC Jacket UL2464 Equivalent	DRAWING NO:		INCH		
NO.	SPECIFICATIONS					
	BOM LIST					