


Rev.	Description	Date
A		02-2022

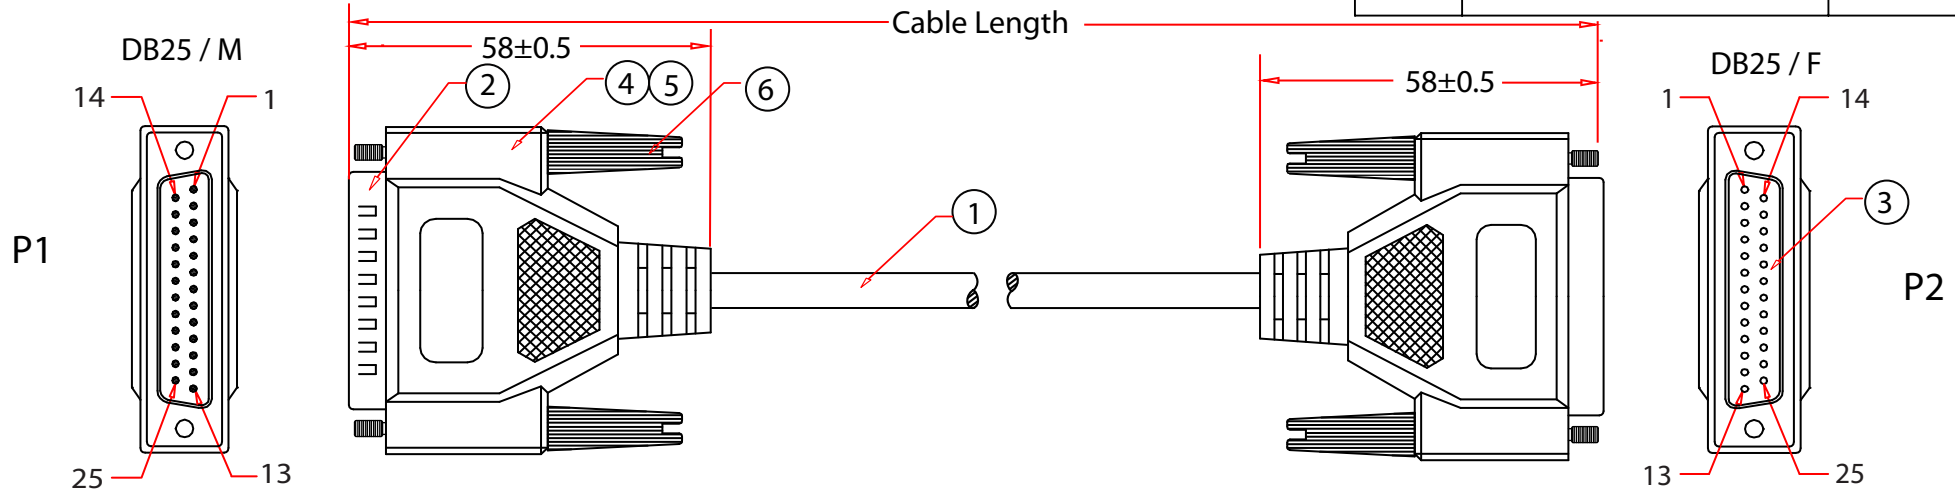


Pin Assignment

	P1	P2	P1	P2
	Black 1	1	Brown/Black 14	14
	Brown 2	2	Red/Black 15	15
	Red 3	3	Orange/Black 16	16
	Orange 4	4	Yellow/Black 17	17
	Yellow 5	5	Green/Black 18	18
	Green 6	6	Blue/Black 19	19
	Blue 7	7	Purple/Black 20	20
	Purple 8	8	Gray/Black 21	21
	Gray 9	9	White/Black 22	22
	White 10	10	Pink/Black 23	23
	Pink 11	11	Light Green/Black 24	24
	Light Green 12	12	Light Blue/Black 25	25
	Light Blue 13	13	Shell	Shell

RoHS

PART NO.	CABLE LENGTH
10D3-01203	3 ft
10D3-01206	6 ft
10D3-01210	10 ft
10D3-01215	15 ft
10D3-01225	25 ft
10D3-01250	50 ft
10D3-012HD	100 ft

6	Molded Thumbscrew, #4-40, Length 46.5mm, Beige
5	Outer Molding Beige PVC Hood, Fully Shielded w/AL-Foil
4	Inner Molding PE, Color Transparent
3	DB25 Female, Gold Flash on Contacts, Blue Insulator
2	DB25 Male, Gold Flash on Contacts, Blue Insulator
1	NON-UL 25C 28AWG+AL/MY+Drain Wire, OD:7.0mm, Beige Outer PVC Jacket
No.	Specifications

Item Number:	10D3-012xx	
Title:	Serial Extension Cable, DB25 Male to DB25 Female, RS-232, 1:1	
Drawn by:	JL	
Approved by:	MAC	
ID:	1	