


# RoHS

## Features and Benefits

- 900µm Tight Buffers
- Water blocking aramid yarn strength members
- UV resistant jacket, OFNR rated construction
- Exclusive use of Corning® optical fibers
- Jacket print ensures product identification and fiber compatibility
- Durable jacket offers added protection during installation and in rugged use applications

## Description

CableWholesale, Inc. Indoor/ Outdoor Cable is composed of 2 to 24 colored tight buffered optical fibers, water blocking aramid yarn, and a UV resistant black PVC outer jacket. All component materials meet the EU RoHS and REACH Directive standards. CWS Indoor/ Outdoor Cable is available in carbon black or special order colors(including 12 TIA standard colors). UL Listed OFNR cables are available, and unrated cables may be supplied to accommodate special needs. Standard surface print denotes construction, NEC rating, and fiber type, and includes footage markers. Custom print may also be accommodated.

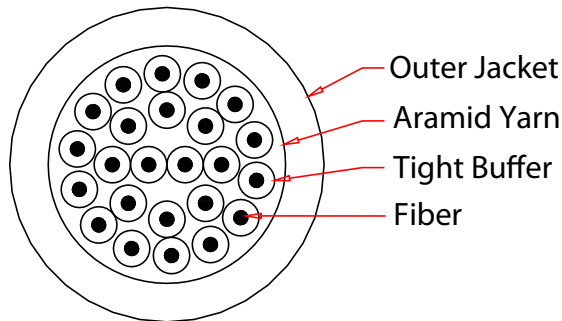

Cable Section

**Application**  
Riser  
Duct  
Indoor/Outdoor

**Flame Rating**  
UL1666  
UL1685 (FT4)

## Product Specifications

Construction & Material :

Item	Specifications
Product	Multimode, 62.5/125
Fiber Count	24
Outer Jacket Material	Flame Retardant PVC
Outer Jacket Color	Carbon Blackge
Strength Member	Aramid Yarn
Tight Buffer Material	Flame Retardant PVC
Tight Buffer Color	Available in 12 TIA/ EIA color standard

## Physical Characteristics

Value(24 Fiber Count)

Nominal Outer Diameter (mm)	7.8
Weight (lbs/ km)	115
Minimum Bend Radius, Installation (cm), of 2 (fiber count)	11.7
Minimum Bend Radius, Operation (cm), of 2 (fiber count)	7.8

## Optical Characteristics

Items	62.5/125
Core Size [µm]	62.5
Wavelength [nm]	850/ 1300
Max. Attenuation[dB/km]	3.5/ 1.5
Link Length[m]	300 (1Gb/s@850nm)
Bandwidth (EMB High Performance)[MHz.km]	220 @850nm

## Specifications

Temperature Range	Indoor
Storage Temperature	-40 °C / +70 °C
Operating Temperature	-40 °C / +70 °C

Item Number:	10F3-224NH	
Title:	24 Fiber Indoor/Outdoor Fiber Optic Cable, Multimode, 62.5/125, Black, Riser Rated, Spool, 1000 foot	
Drawn by:	JL	
Approved by:	MAC	
ID:	120	

No. Specifications