


RoHS

Rev.	Description	Date
A		05-2019

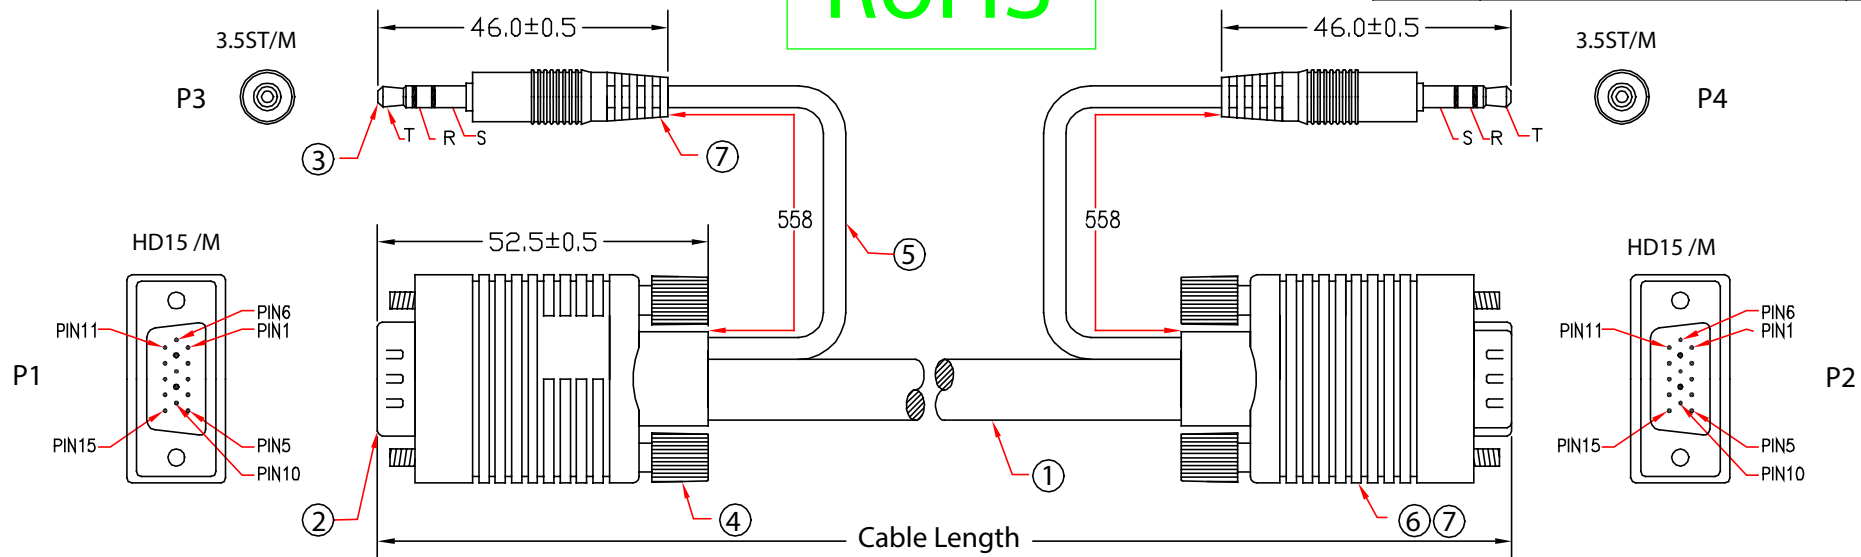

Pin Assignment					
HD15/M	HD15/M	HD15/M	HD15/M	3.5ST/M	3.5ST/M
P1	P2	P1	P2	P3	P4
1	1	9	9	T	7
6	6	5	5	R	3
2	2	12	12	S	8
7	7	10	10		
3	3	13	13		
8	8	11	11		
4	4	15	15		
14	14	Shell	Shell		

PART NO.	CABLE LENGTH
10H1-20103	3 ft
10H1-29115	15 ft
10H1-29125	25 ft
10H1-29150	50 ft
10H1-29175	75 ft

7	Black PVC Molded Hood
6	Transparent PE Molded Inner Hood
5	Non-UL 3C 28AWG, AL/Foil Shield with Drain Wire, OD3.5mm, Black PVC Jacket
4	#4-40 Molded Thumbscrew, Length 48mm, Color: Black
3	3.5mm Stereo Male
2	HD15 Male, Gold Flash on Contacts, Blue Insulator
1	UL2919, 3C Mini-Coaxial 28AWG Cable / 4.5 Twisted Pairs 28WG / 3C 28AWG, AL/Foil and Copper Braid Shielding with Drain Wire, OD 9.5mm, Black Outer PVC Jacket
No.	Specifications

Item Number:	10H1-291xx	
Title:	Shielded SVGA Cable with 3.5mm Audio, Black, HD15 Male, Coaxial Construction, Double Shielded	
Drawn by:	JL	
Approved by:	MAC	
ID:	1	