



REV.	DESCRIPTION	DATE
A		10-2017

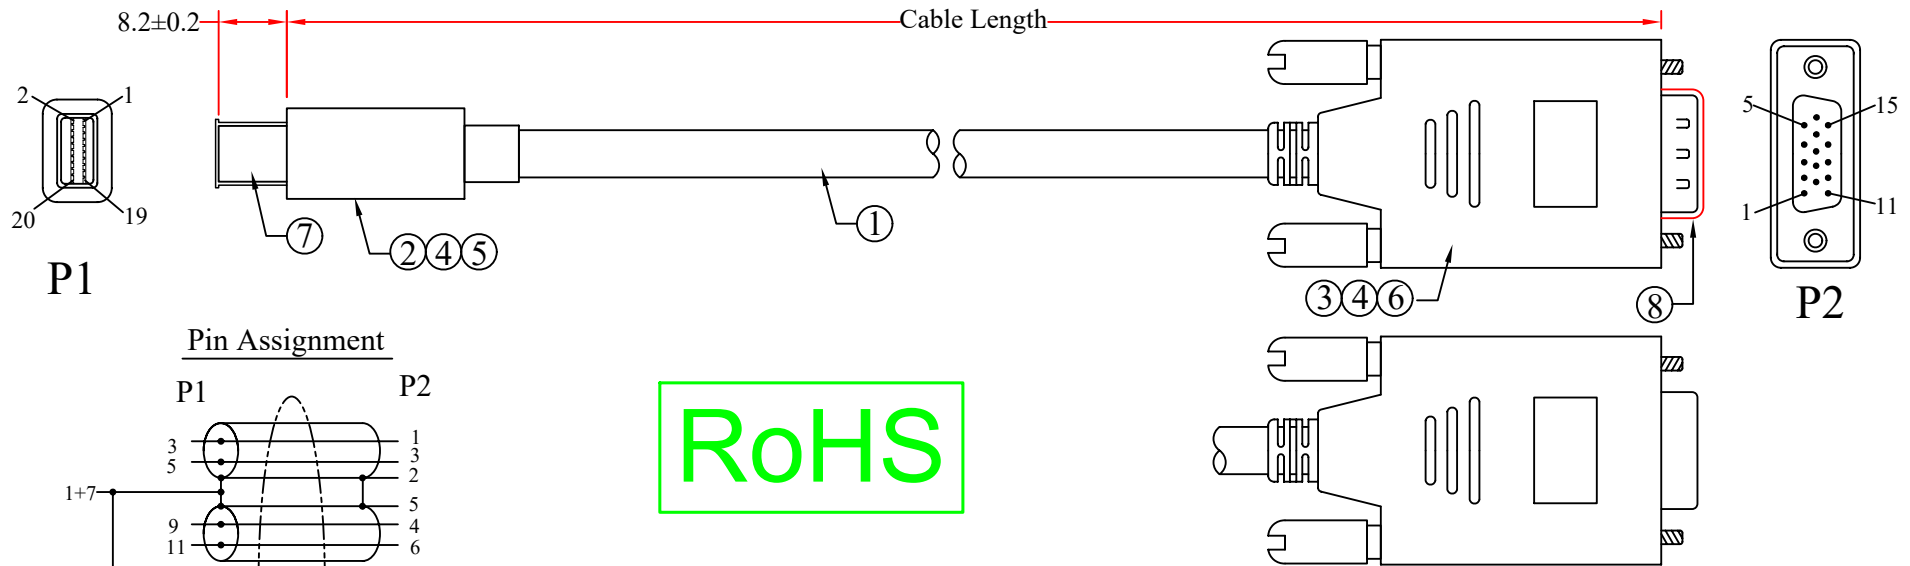

Pin Assignment

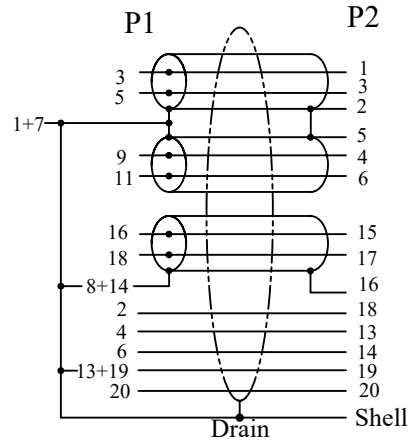

RoHS

NOTES:

- 1.Electrical Test:
 - <1>. 100% Open Short & Miss Wire Test.
 - <2>. Conductor Resistance:2 ohm Max
 - <3>. Insulation Resistance:10M ohm Min
 - <4>.Hi-Pot:100V DC/10ms

PART NO.	CABLE LENGTH
10H1-62403	3 FT
10H1-62406	6 FT
10H1-62410	10 FT
10H1-62415	15 FT

8	Dust Cover For VGA
7	Dust Cover For Mini DP
6	Screw #4-40UNC 2.8*58.25MM, Nickel Plated
5	Inside Molding:PE
4	S.R Molding PVC, Snow White
3	Mini DP to VGA Converter With VGA Male,PCB+SMT, VGA Pin Gold Flash, Shell Gold Plated Shell Gold Flash, With ABS Plastic Hood
2	Mini Display Port Male, Insulation White, Material LCP, Pin Gold Plated, Shell Gold Flash
1	UL20276 [32AWG(7/0.08TC)*1P+D.W+AL+Mylar]*3+32AWG(7/0.08TC)*5C+AL/MY+D.W+Braid, OD:4.8±0.2mm,Snow White PVC Jacket
NO.	SPECIFICATIONS
BOM LIST	

ITEM NUMBER	10H1-624xx			DRAWER	JL
TITLE	Mini DisplayPort to VGA Video Cable			CHECKED	
MATERIAL		SCALE		APPROVED	
REV.	A	UNIT	INCH		
DRAWING NO:				 888-212-8295.com	
ID(NO.)	1				