



| Rev. | Description | Date |
|------|-------------|---------|
| A | | 08-2020 |

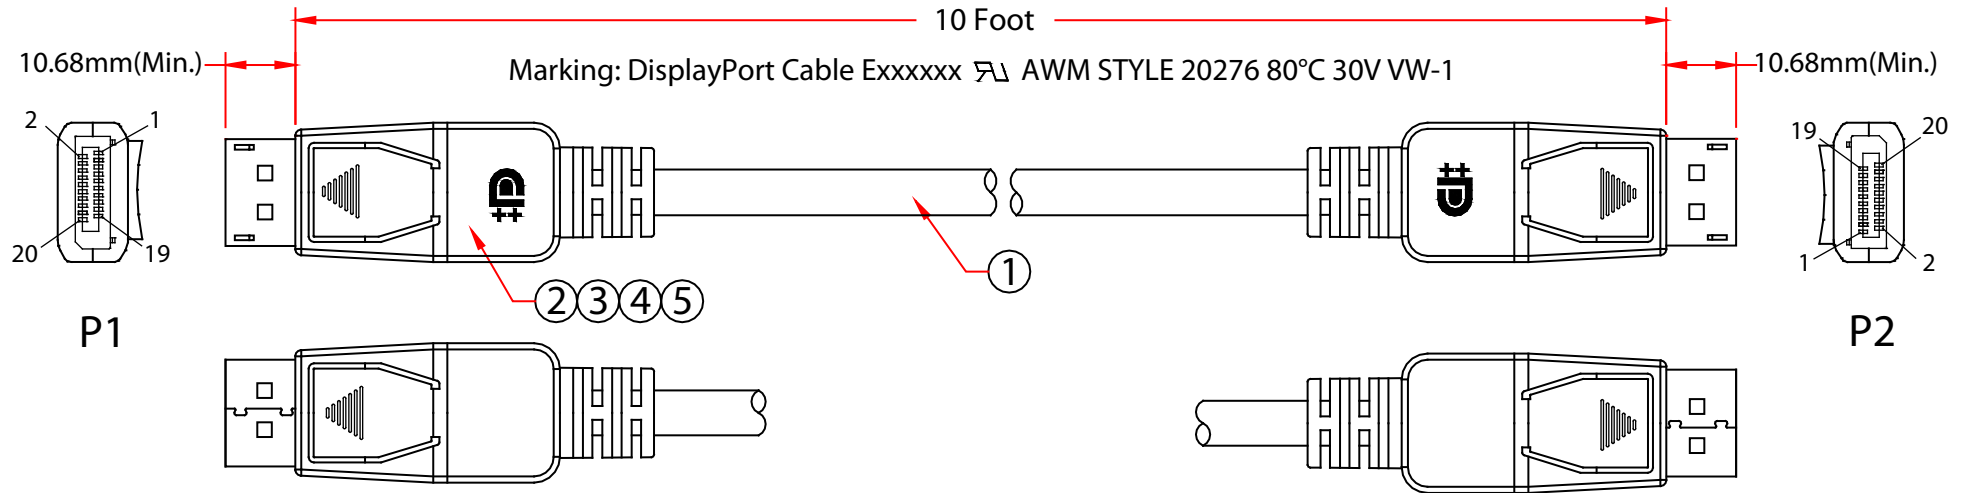

Pin Assignment

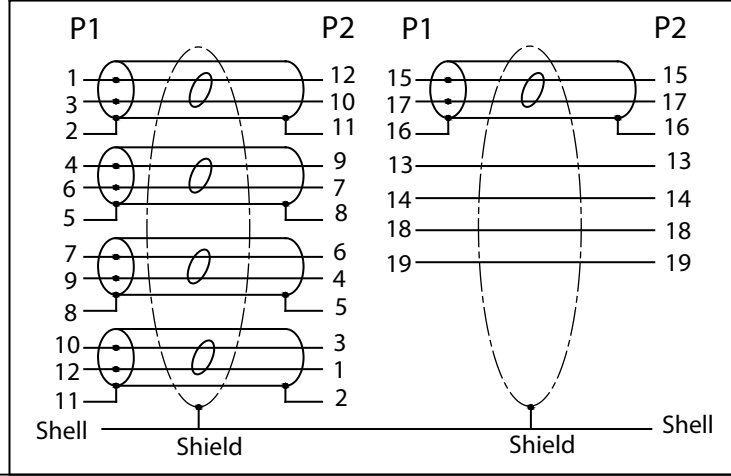


NOTES:

- 1. Electrical Test:
 - <1>. 100% Test (Open Short & Miss Wire)
 - <2>. Conductor Resistance: 3 ohm Max
 - <3>. Insulation Resistance: 10M ohm Min
 - <4>. Hi-Pot: 100V DC/10ms

RoHS

| | |
|-----|---|
| 4 | Inside Molding: LDPE |
| 3 | Outside Molding: Black PVC |
| 2 | DisplayPort Male, Insulation Black, Shell Gold Plated, the Tin, Black ABS Plastic Hood |
| 1 | DP1.4 [27AWG(7/0.14TC)+EAM]*5P+27AWG(7/0.14TC)*4C+AEB(16/10/0.12 85%AL), OD:7.3mm, Black PVC Jacket |
| No. | Specifications |

| | | |
|--------------|---|---|
| Item Number: | 10H1-70110 | |
| Title: | DisplayPort v1.4 Video Cable, 32.4 Gbit/s Data Rate for up to 8k@60Hz and 4k@120Hz, DisplayPort Male, 10 foot | |
| Drawn by: | JL |  |
| Approved by: | MAC | |
| ID: | 1 | |