


Rev.	Description	Date
A		01-2021

RoHS

Cross Section

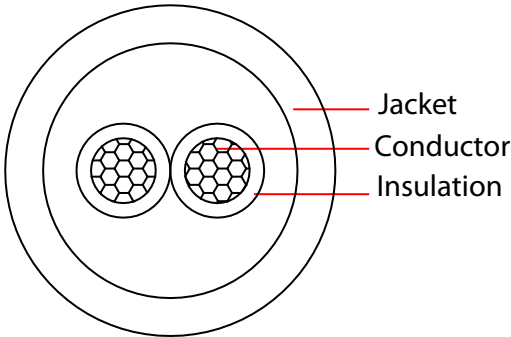


Construction & Material :

Item		Specifications
Product		CMR Security/Alarm Wire
Conductor	Construction	Stranded, 2 x22AWG(7/0.25mm)
	Material	Bare Copper
Insulation	Material	PVC
	Avg.thickness	0.15mm
	Diameter	1.0± 0.05 mm
	Color	Black and Red
Jacket	Material	PVC
	Avg.thickness	0.38 mm
	Diameter	OD Average 2.134 / Final Diameter 2.896mm
	Color	White
Marking	STRUCTURED CABLE PRODUCTS --- P/N 22/2 --- (UL) CL3R Exxxxxx-SCP (UL) C(UL) CMR UNSH 2/C 22 AWG --- ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 RoHS	

Characteristics	
Mutual Capacitance	24.2 pF/ft
DC Resistance 25°C	16 Ohms / 1000 ft
Impedance	80 Ohms
Velocity of Prop	59 %
Inductance	1.4 mH/km
Temp/Voltage	60°C / 300V
Operating Temperature	-20°C to 60°C

PART NO.	Length	Weigth
10K4-02912SF	500FT	4 lbs / 2.0 kgs
10K4-02912SH	1000FT	9 lbs / 4.0 kgs

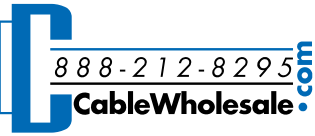Item Number:	10K4-02912Sx	
Title:	Security/Alarm Wire, 22/2 (22AWG 2 Conductor), White, Stranded, CMR / Inwall rated, Pullbox	
Drawn by:	JL	
Approved by:	MAC	
ID:	123	

No.	Specifications
-----	----------------