


REV.	DESCRIPTION	DATE
A		02-2018

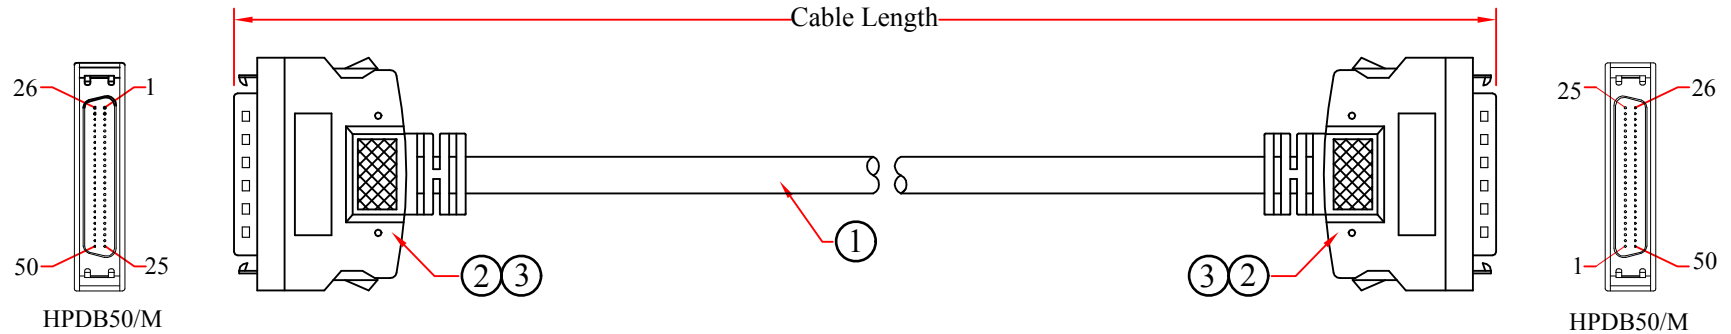

**Pin Assignment**

HPDB50/M	HPDB50/M	HPDB50/M	HPDB50/M	HPDB50/M	HPDB50/M
1	1	10	10	19	19
26	26	35	35	44	44
2	2	11	11	20	20
27	27	36	36	45	45
3	3	12	12	21	21
28	28	37	37	46	46
4	4	13	13	22	22
29	29	38	38	47	47
5	5	14	14	23	23
30	30	39	39	48	48
6	6	40	40	49	49
31	31	16	16	25	25
7	7	41	41	50	50
32	32	17	17		
8	8	42	42	Shield	Braid+Drain
33	33	18	18		Shield
9	9	43	43		
34	34				

RoHS

PART NO	CABLE LENGTH
10P1-0211H	1.5 FT
10P1-02103	3 FT
10P1-02106	6 FT
10P1-02110	10 FT

ITEM NUMBER	10P1-021xx		DRAWER	JL
TITLE	HPDB50 (Half Pitch DB50) Male, SCSI II cable, 25 Twisted Pairs		CHECKED	
MATERIAL	SCALE		APPROVED	
REV.	A	UNIT	INCH	
DRAWING NO:				
ID(NO.)	1			

3	Beige Molded PVC Hood, w/Copper Foil
2	HPDB50 Male with Latch 2 Pcs, Gold Flash On Contacts, Black Insulator
1	UL2990 25 Twisted Pairs 28AWG, AL-Mylar and Copper Braid Shielding, with Drain Wire, OD:8.2mm, Beige PVC Jacket
NO.	SPECIFICATIONS
BOM LIST	