


REV.	DESCRIPTION	DATE
A		01-2018

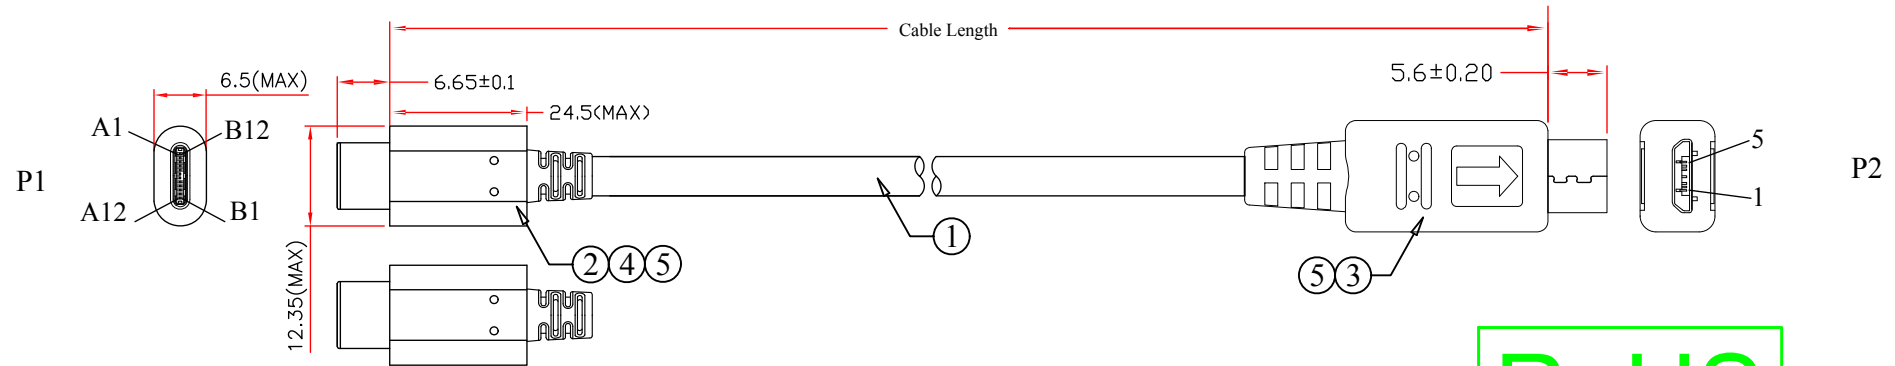

RoHS

Pin Assignment	
	P2
A4+B4+A9+B9	Red 1 24#
A7	Green 2
A6	White 3
A1+B1+A12+B12	Black 5 24#
A5	(10K Ω ± 5%)0420
Shield	Shield

NOTES:

1. Electrical Test:

- (1) 100% Open Short & Miswire Test.
- (2) Insulation Resistance: DC 300V ≥ 5MΩ
- (3) Conductor Resistance: ≤ 2 Ω

PART NO.	CABLE LENGTH
10U2-33003	3 FT
10U2-33006	6 FT

ITEM NUMBER		10U2-330xx		DRAWER	JL
5	Molded Black PVC Hood	TITLE USB2.0 Type C Male to Micro B Male , 480mb		CHECKED	
4	PE Matural			APPROVED	
3	USB2.0 Micro 5 (B) Male ,Black Insulation, Solder Type	MATERIAL	SCALE		
2	USB2.0 C Type Male ,Black Insulation, Solder Type, (10K Ω ± 5%)0420 (Type C 2.0)	REV.	A UNIT MM		
1	USB 2725 28AWG*1P+24AWG*2C+ADB,OD: 4.5mm, Black Outer PVC Jacket	DRAWING NO:			
NO	SPECIFICATIONS	ID(NO.)	44		
BOM LIST					