




Rev.	Description	Date
A		03-2019

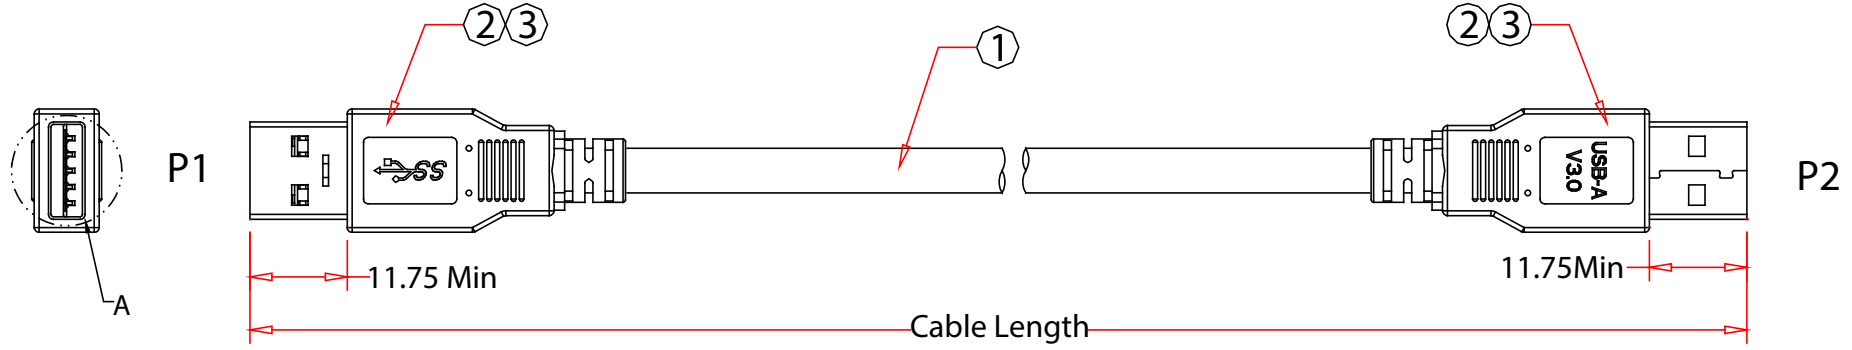


RoHS

Pin Assignment		
P1		P2
1	Red	1
2	Green	2
3	White	3
4	Black	4
5	Yellow	8
6	Blue	9
7	Drain	7
8	Orange	5
9	Purple	6
Shell	Braid	Shell

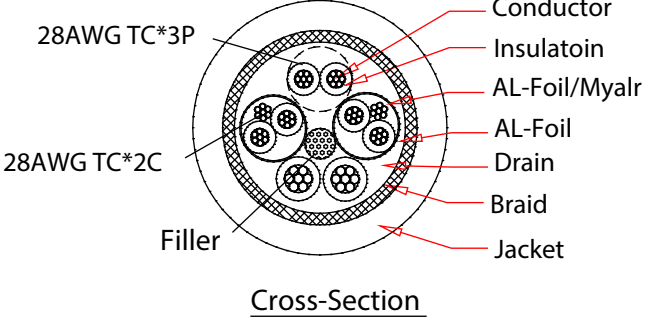

NOTES:
 Rating Temperature: -10°C ~ +80°C
 Rating Voltage: 30V
 Insulation Resistance: DC 250V 10MΩ Min.
 Withstand Voltage: AC 250V 5mA For One Minute
 Conductor Resistance: 2Ω Max.

PART NO.	CABLE LENGTH
10U3-02101	1 ft
10U3-02103	3 ft
10U3-02106	6 ft
10U3-02110	10 ft

Item Number:	10U3-021xx	
Title:	USB 3.0 Cable, Blue, Type A Male / Type A Male	
Drawn by:	JL	
Approved by:	MAC	
ID:	108	

No.	Specifications
4	
3	Blue Molded PVC
2	USB3.0 Type A Male, Contact:Gold Flash, Shell: Nickel Plated, Insulation Blue
1	UL2725[28AWG(7/0.127TC)*1P+D(7/0.12TC)+AL-Foil/Mylar]*2C+28AWG(7/0.27TC)*1P+28AWG(7/0.12TC)*2C+Filler+AL+Braid, Blue Outer PVC Jacket