

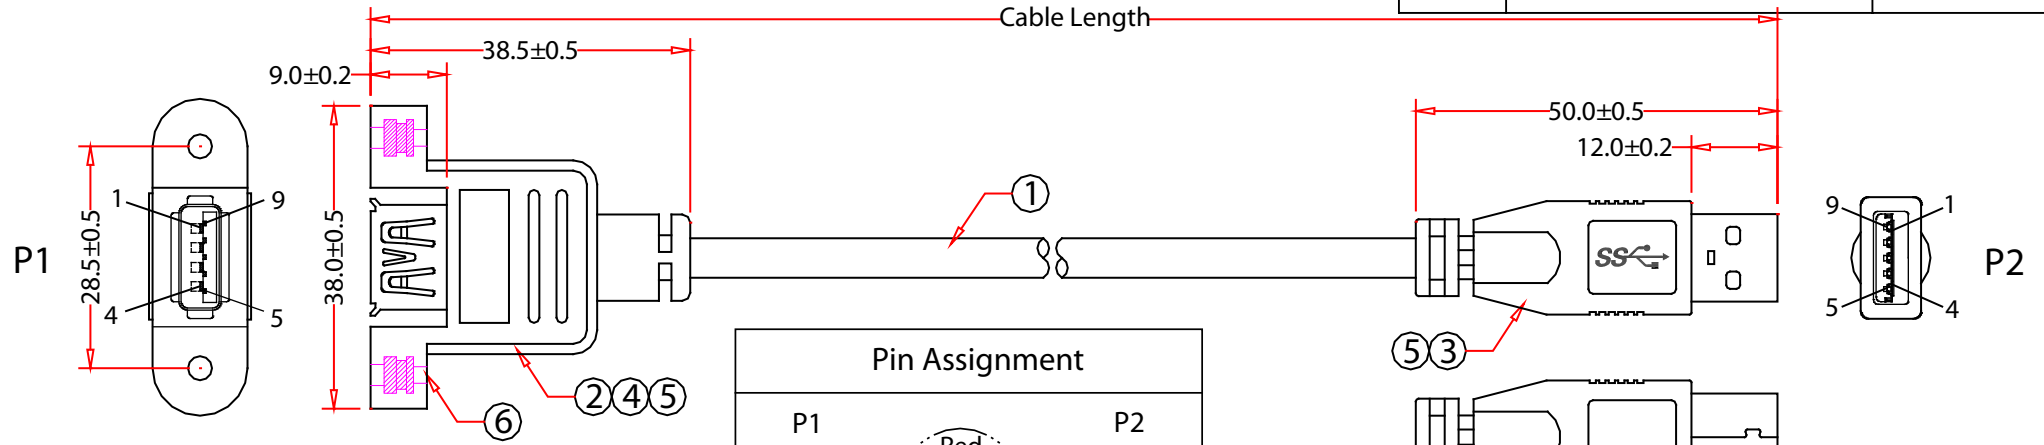


Rev.	Description	Date
A		07-2021

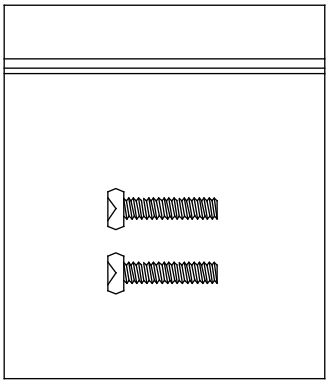

Packing:
 Inside Self-Given Pag:
 Screw 5.2*14mm(2 Pcs)




Pin Assignment		
P1		P2
1	Red	1
2	Green	2
3	White	3
4	Black	4
5	Yellow	5
6	Blue	6
7	Drain	7
8	Orange	8
9	Purple	9
Shell	Braid	Shell

RoHS

PART NO.	CABLE LENGTH
10U3-24101	1 FT
10U3-24103	3 FT
10U3-24106	6 FT
10U3-24108	8 FT
10U3-24110	10 FT

NOTES:
 1.Electrical Test:
 (1)100% Open Short & Miswire Test.
 (2) Insulation Resistance 1 MΩ MIN.

7	Screw 5.5*8.0mm
6	Hex-Nut 5*7.7mm
5	Black Molded PVC
4	Inner Molded PE, Color Transparent
3	USB A Type Female ,Gold Flash on Contact,White Insulation
2	USB A Type Male ,Gold Flash on Contact, White Insulation, Crimp Two Pierce Type
1	USB 2.0 Cable, UL 2725 28AWG*1P+24AWG*2C+AL+AMA Braid, OD: 4.5mm, Black Outer PVC Jacket
No.	Specifications

Item Number:	10U3-241xx	
Title:	USB 3.0 Panel Mount Extension Cable, Type A Male to Panel Mount Female, Black	
Drawn by:	JL	
Approved by:	MAC	
ID:	1	