


Rev.	Description	Date
A		05-2021

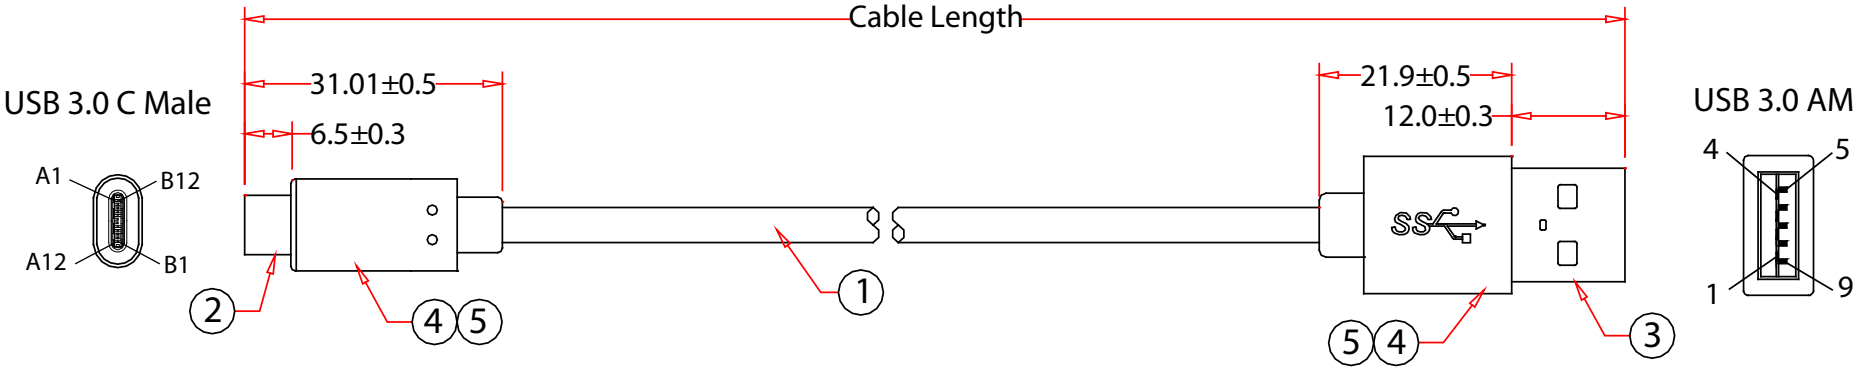


Pin Assignment	
P1	P2
A4+B4+A9+B9	1 Red
A7	2 White
A6	3 Green
A1+B1+A12+B12	4 Black
A3	5 Blue
A2	6 Yellow
A1+B1+A12+B12	7 Shield
B10	8 Purple
B11	9 Orange
Shield	Shield

RoHS

PART NO.	CABLE LENGTH
10U3-31200.5	0.5 Meter(1.64ft)
10U3-31201	1 Meter(3.28ft)

5	Molded PVC Black
4	Molded PE Color Transparent
3	USB3.0 A Male ,Gold Flash on Contacts, Blue Insulation, Short A Piece Type
2	USB3.0 C Male ,Gold Flash on Contacts, with PCB, Black Insulation, Resistance 56K ohm & Capacitor 10nF
1	UL2725 Cable, 32AWG*1P+(32AWG*2P+D+AML)*2Pcs+26AWG*2C+AL +Copper Braid(70%), OD: 4.5±0.2mm, Black Outer PVC Jacket
No.	Specifications

Item Number:	10U3-312xx	
Title:	USB 3.0 Type A Male to Type C Male	
Drawn by:	JL	
Approved by:	MAC	
ID:	156	