


REV.	DESCRIPTION	DATE
A		03-2016

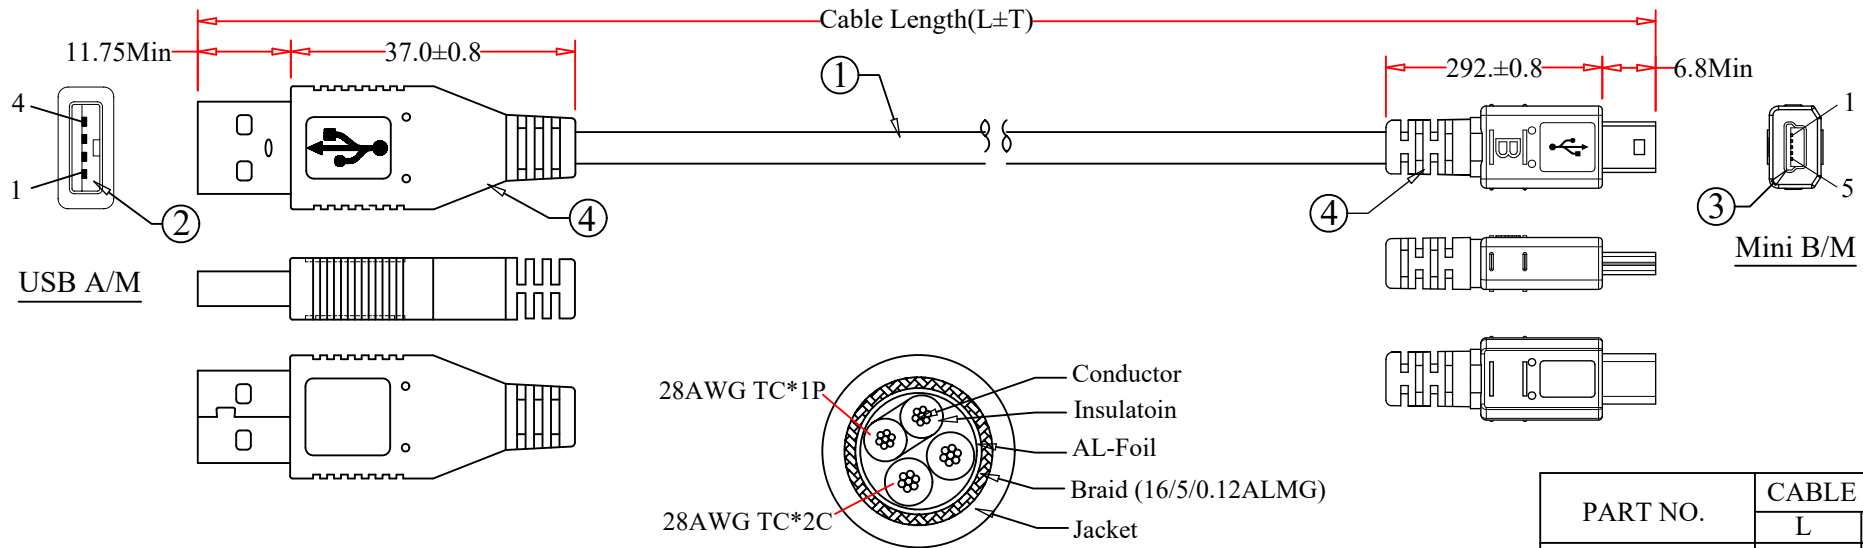

Pin Assignment		
USB AM		Mini BM
1	Red	1
2	Green	2
3	White	3
4	Black	5
Shell	Braid	Shell

RoHS

NOTES:

- 1. Electrical Test:
- (1) 100% Open Short & Miswire Test.
- (2) Insulation Resistance 1 MΩ MIN.

PART NO.	CABLE LENGTH	
	L	±T(mm)
10UM-02101BK	1 FT	-10/+30
10UM-02101.5BK	1.5 FT	±30
10UM-02103BK	3 FT	±30
10UM-02106BK	6 FT	±50
10UM-02110BK	10 FT	±50
10UM-02115BK	15 FT	±50

4	Black Molded PVC
3	USB Mini 5Pin (B Type) Male ,Contact:Gold Flash, Shell: Nickel Plated, Insulation Black
2	USB A Type Male ,Contact:Gold Flash, Shell: Nickel Plated, Insulation White
1	USB 2.0 CABLE UL 2725 28AWG*1P+28AWG*2C+AB(16/5/0.12ALMG), OD: 3.8±0.15mm, Black Outer PVC Jacket
NO.	SPECIFICATIONS

ITEM NUMBER	10UM-021xxBK			DRAWER	JL
TITLE	Micro USB 2.0 Cable, Black, Type A Male / Mini -B Male			CHECKED	
MATERIAL		SCALE		APPROVED	
REV.	A	UNIT	INCH		
DRAWING NO:				 888-212-8295.com	
ID(NO.)	124				

BOM LIST	
----------	--