


REV.	DESCRIPTION	DATE
A		06-2015

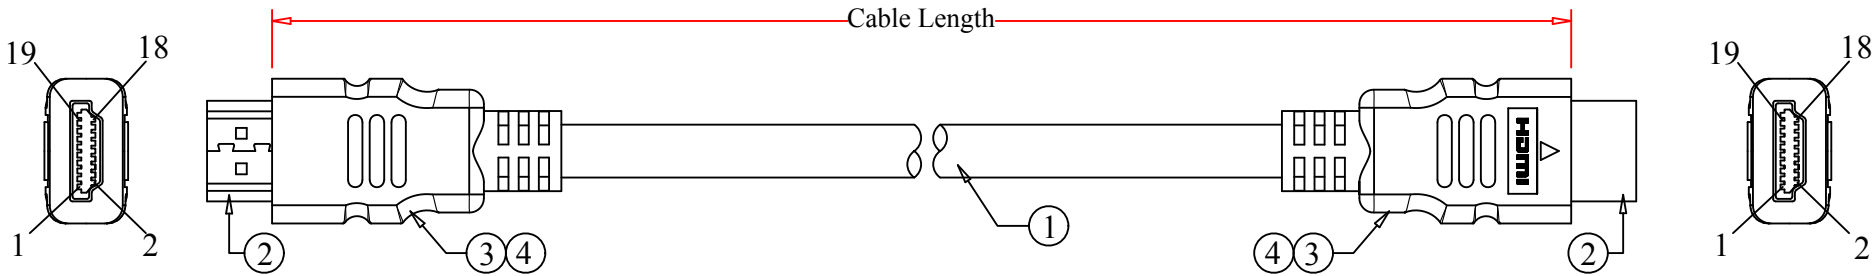

Cable Specifications	
1P*1/0.23mm Solid Bare Copper Conductor	
4P*1/0.23mm Solid CCS Conductor	
AL-Mylar Shield	
OD:5.5mm OD PVC Jacket	
Foam PE(1P*5) and HD-PE(4C) Insulation	

Pin Assignment			
P1	P2	P1	P2
1	1	10	10
3	3	12	12
4	4	14	14
6	6	19	19
7	7	13	13
9	9	15	15
		16	16
		18	18
		Shell	Shell
		Drain	

RoHS

PART NO.	CABLE LENGTH
10V1-41103	3 FT
10V1-41106	6 FT

4	45P PVC, Color: Black
3	Inner Molding, Color: Clear
2	HDMI 19/M , Insulation: Black, Shell Gold Plated
1	[(1/0.23 BC*1P)w/AL-Foil]*1Pcs+(1/0.23 CCS*1P)w/AL-Foil]*4Pcs+1/0.23 CCS*4C, w/AL-Foil+Drain,OD: 5.5mm, Black PVC Jacket
NO.	SPECIFICATIONS
BOM LIST	

ITEM NUMBER	10V1-411xx		DRAWER	JL
TITLE	HDMI Cable, High Speed with Ethernet, HDMI 19P Male to Male		CHECKED	
MATERIAL	SCALE		APPROVED	
REV.	A	UNIT	INCH	
DRAWING NO:				
ID(NO.)	223			