



REV.	DESCRIPTION	DATE
A		
B		03-2009

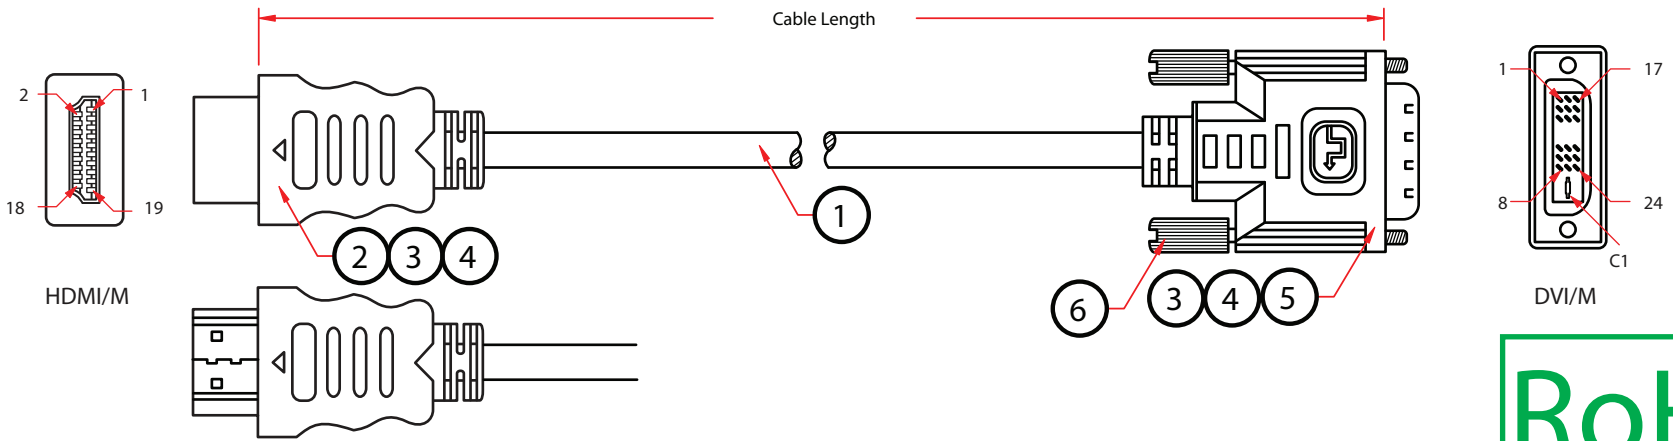

Cable Specifications:

28AWG 7/0.127mm Stranded Tinned Copper Conductor
 0.025mm AL-Mylar Foil Shield
 Tinned Copper Braid 16/10/0.12mm, 85% Coverage
 0.98mm Foam PE(1P*4) and 0.70mm HD-PE(1P+5C) Insulation
 28AWG 7/0.127mm Stranded Tinned Copper Drain Wire
 7.3 mm OD PVC Jacket

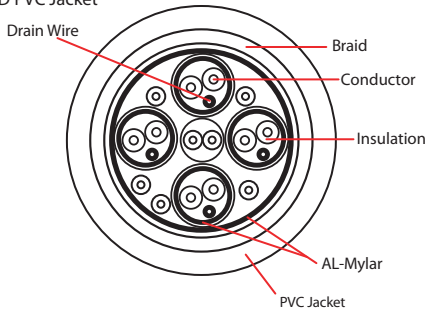

Pin Assignment

HDMI Male	DVI-D Male	HDMI Male	DVI-D Male
1 White	2 Drain	10 White	23 Drain
2 Drain	3 Red	11 Drain	22 Green
3 Red	1 White	12 Green	24 Grey
4 White	10 Drain	15 Grey	6 White
5 Drain	11 Brown	16 White	7 Yellow
6 Brown	9 White	17 Yellow	15 Orange
7 White	18 Drain	18 Orange	14 Purple
8 Drain	19 Blue	19 Purple	16 Shell
9 Blue	17 Shell	Shell Braid	Shell



Note:
 1. 100% Open and Short Testing
 2. Voltage: 500V DC
 3. Dielectric: 300V AC for 3ms
 4. Insulation Resistance: 20M ohm
 5. Conductor Resistance: 3 ohm

PART NO.	CABLE LENGTH
10V3-21503	3 ft
10V3-21506	6 ft
10V3-21510	10 ft
10V3-21515	15 ft

7	
6	4/40 Molded Thumbscrew, Black Color
5	DVI-I Single Link 19 Pin Male W/Gold Plating Contacts
4	45P PVC, Color: Black
3	Inner Molding, Color: Clear
2	HDMI 19/M 30U, Insulation: Black, Solder Type, HDMI Shell: Gold Plated, 15u
1	CL2 Inwall Rated, UL20276 3C [(28AWG*1P + Drain) w/Al-Foil] *4 + 28AWG*1P + 28AWG*5C, w/Al-Foil + Braid, OD: 7.3mm, Black PVC Jacket
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	10V3-215xx		DRAWER	LIBRA
TITLE	HDMI to DVI cable CL2 rated In-wall		CHECKED	
			APPROVED	
MATERIAL		SCALE		
REV.	A	UNIT	INCH	
DRAWING NO:				

