



REV.	DESCRIPTION	DATE
A		
B		01-2010

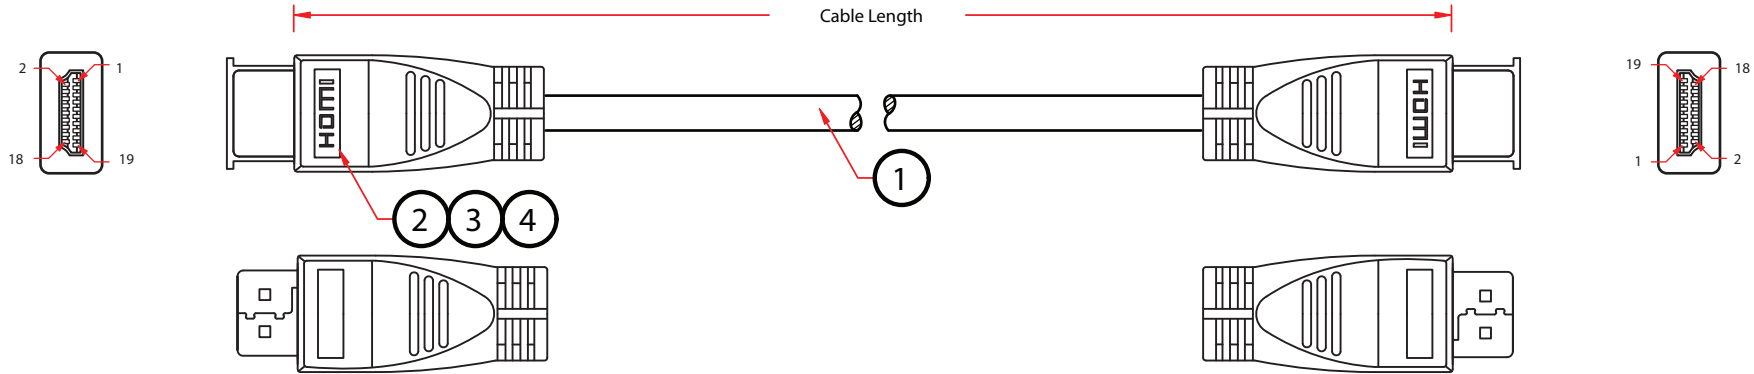

**Cable Specifications:**

28AWG 7/0.127mm Stranded Tinned Copper Conductor  
 0.025mm AL-Mylar Foil Shield  
 Tinned Copper Braid 16/10/0.12mm, 85% Coverage  
 1.0mm Foam PE(1P\*5) and 0.75mm HD-PE(1P+2C) Insulation  
 7.3 mm OD PVC Jacket

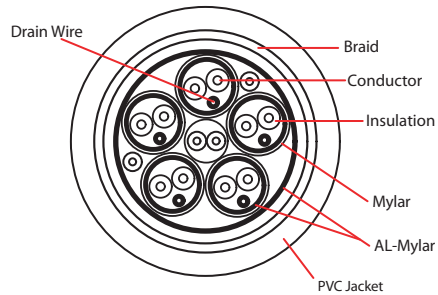

**Pin Assignment**

HDMI Male		HDMI Male		HDMI Male		HDMI Male	
1	White	1	White	10	White	10	White
2	Drain	2	Drain	11	Drain	11	Drain
3	Red	3	Red	12	Green	12	Green
4	White	4	White	13	Yellow	13	Yellow
5	Drain	5	Drain	14	White	14	White
6	Brown	6	Brown	17	Drain	17	Drain
7	White	7	White	19	Black	19	Black
8	Drain	8	Drain	15	Red	15	Red
9	Blue	9	Blue	16	Green	16	Green
				18	Purple	18	Purple
				Shell	Braid	Shell	Braid



PART NO.	CABLE LENGTH
10V3-41101.5	1.5ft
10V3-41103	3 ft
10V3-41106	6 ft
10V3-41110	10 ft
10V3-41115	15 ft

5	
4	45P PVC, Color: Black
3	Inner Molding, Color: Clear
2	HDMI 19/M 30U, Insulation: Black, Solder Type, HDMI Shell: Gold Plated, 15u
1	CL2 Inwall Rated, UL20276 [(28AWG*1P + Drain) w/Al-Foil] *5 + 28AWG*1P + 28AWG*2C, w/Al-Foil + Braid, OD: 7.3mm, Black PVC Jacket
NO.	SPECIFICATIONS
	BOM LIST

ITEM NUMBER	10V3-411xx			DRAWER	LIBRA
TITLE	HDMI Male to HDMI Male Cable, 1.4 Version, TC-Braid,Black, CL2-rated			CHECKED	
MATERIAL		SCALE		APPROVED	
REV.	A	UNIT	INCH		
DRAWING NO:					