


REV.	DESCRIPTION	DATE
A		
B		06-2007

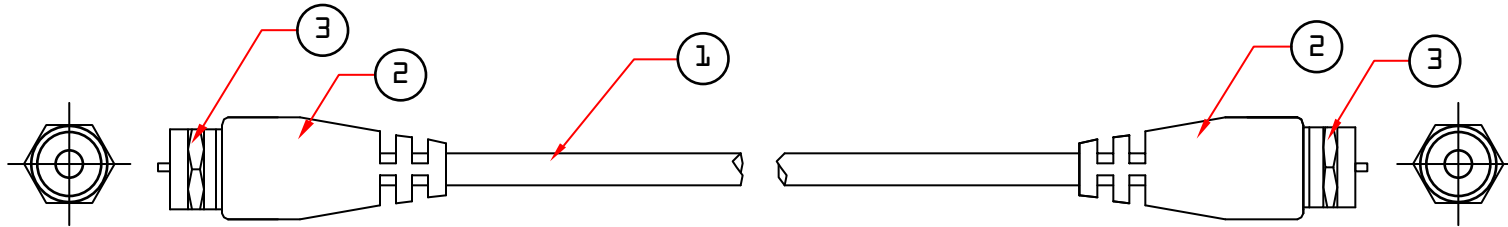


F-Pin / M

F-Pin / M

Cable Specifications:

R66 U-75 Ohm Coaxial Cable
 18AWG 1.0mm Copper Clad Steel Central Conductor
 0.025mm Aluminium-Polyester Foil Shield
 AL-Braid (60% Coverage)
 4.57mm OD PE Dielectric
 6.9mm OD Black Flex PVC Jacket

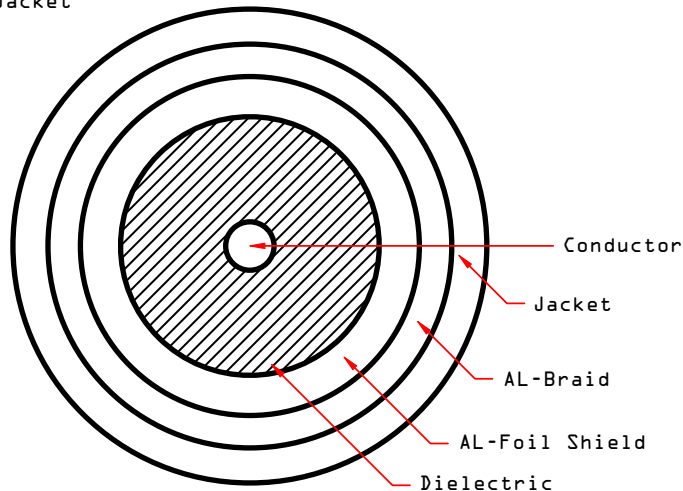

PART NO.	CABLE LENGTH
10X4-01103	3 ft
10X4-01106	6 ft
10X4-01112	12 ft
10X4-01115	15 ft
10X4-01118	18 ft
10X4-01125	25 ft
10X4-01150	50 ft
10X4-01175	75 ft
10X4-011HD	100 ft
10X4-011150	150 ft

3	F-Pin R66/UL Nickel Plated
2	F-Pin Male (R66) Nickel Plated
1	R66/UL Cable Conductor Coaxial OD:1.0 + PE + AL-Foil + 60% AL-Braid Shield, Jacket OD: 6.9mm, Black PVC Jacket
NO. SPECIFICATIONS	
BOM LIST	

ITEM NUMBER	10X4-011xx	DRAWER	MPD
TITLE	R66 F-Pin Male / R66 F-Pin Male Coax Cable	CHECKED	MAC
		APPROVED	MAC
MATERIAL		SCALE	
REV.	A	UNIT	INCH
DRAWING NO:			