
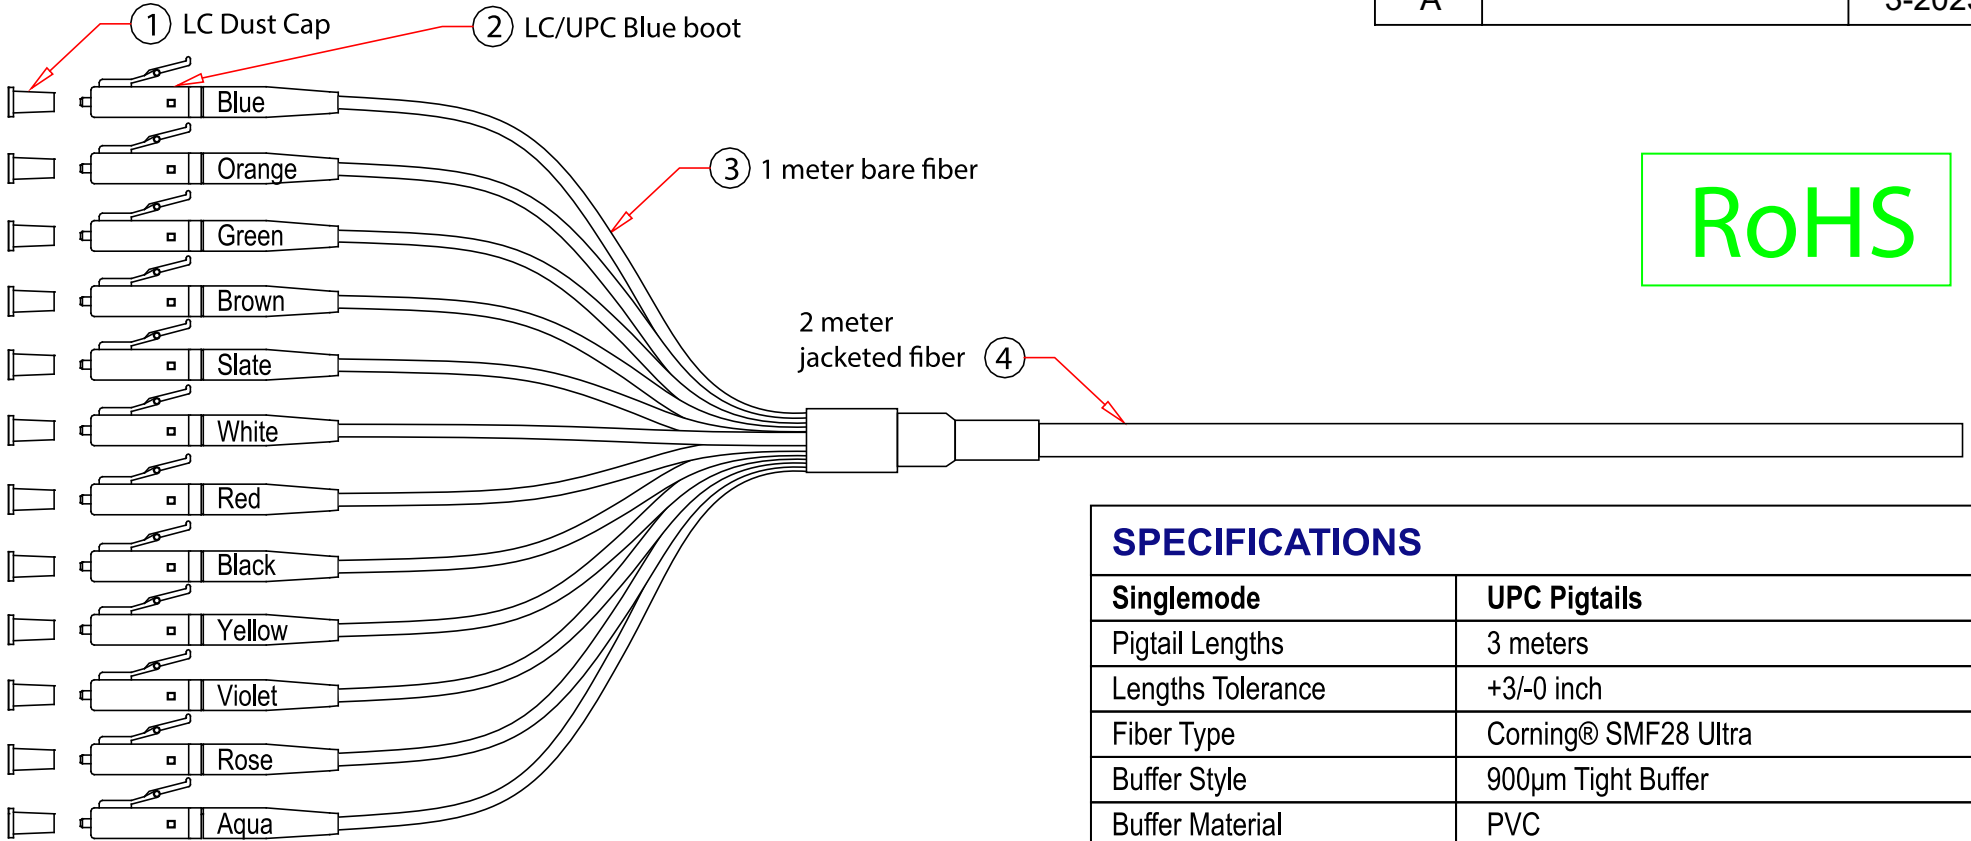


Rev.	Description	Date
A		3-2023



RoHS

SPECIFICATIONS	
Singlemode	UPC Pigtails
Pigtail Lengths	3 meters
Lengths Tolerance	+3/-0 inch
Fiber Type	Corning® SMF28 Ultra
Buffer Style	900µm Tight Buffer
Buffer Material	PVC
Insertion Loss	0.3dB (max)
Back Reflection	-55dB
Operating Temperature	-20 to +70 degrees Celsius
Storage Temperature	-40 to +70 degrees Celsius

Item Number:	15F2-02112	
Title:	Color-coded distribution style pigtail packs	
Drawn by:	MNM	
Approved by:	MAC	
ID:		

Pin Assignment	
Side	Open
1	Blue
2	Orange
3	Green
4	Brown
5	Slate
6	White

Pin Assignment	
Side	Open
7	Red
8	Black
9	Yellow
10	Violet
11	Rose
12	Aqua

- Notes:**
- Pigtail length: 3 meters
 - Length tolerance: +3 inch
 - Fiber Type: Corning SMF25Ultra
 - Buffer Material: PVC
 - Insertion Loss: 0.3dB (max)
 - Back Reflection -55dB
 - Operating Temperature -20 to +70 degrees C