
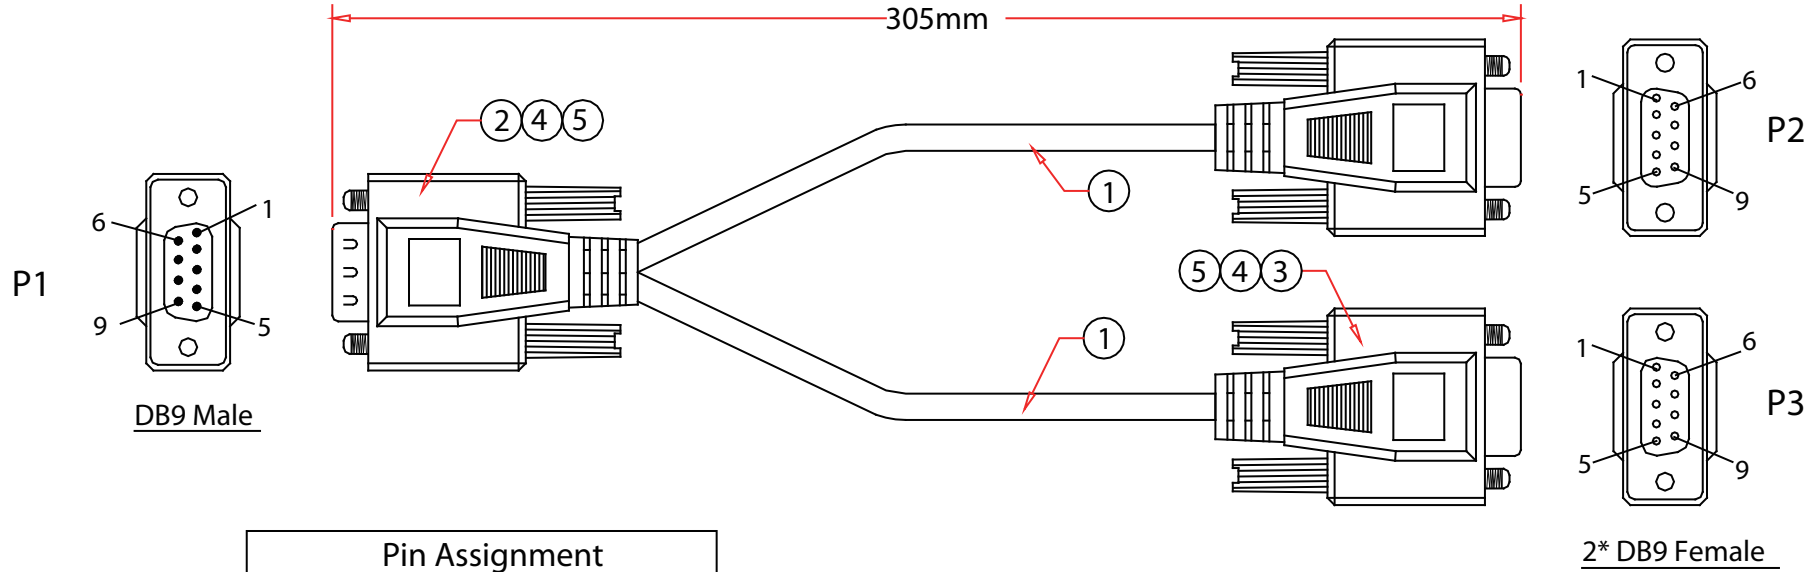


| | | |
|------|-------------|---------|
| Rev. | Description | Date |
| A | | 03-2020 |



| Pin Assignment | | | | |
|----------------|-------|-------|-------|-------|
| P1 | P2 | P3 | | |
| 1 | 1 | 1 | — | 1 |
| 2 | 2 | 2 | — | 2 |
| 3 | 3 | 3 | — | 3 |
| 4 | 4 | 4 | — | 4 |
| 5 | 5 | 5 | — | 5 |
| 6 | 6 | 6 | — | 6 |
| 7 | 7 | 7 | — | 7 |
| 8 | 8 | 8 | — | 8 |
| 9 | 9 | 9 | — | 9 |
| Shell | Drain | Shell | Drain | Shell |

RoHS

| | | | |
|--------------|---|---|--|
| Item Number: | | 30D1-27212 | |
| Title: | | DB9M TO DB9F*2 , 1FT , Y CABLE | |
| Drawn by: | | JL | |
| Approved by: | | MAC | |
| ID: | | 1 | |
| No. | Specifications |  | |
| 5 | #4-40 Molded Thumbscrew, L:46.5mm, Color Beige | | |
| 4 | Beige Molded PVC Hood, Fully Shielded w/AL-Foil | | |
| 3 | DB9P Female, Gold Flash on Contacts, Insulation Blue, Shell Nickel Plated | | |
| 2 | DB9P Male, Gold Flash on Contacts, Insulation Blue, Shell Nickel Plated | | |
| 1 | 28AWG, 9 C+Drain Wire, Single Shielded with AL-Foil, OD:5.0, Beige Outer PVC Jacket | | |