



Rev.	Description	Date
Α		08-2019

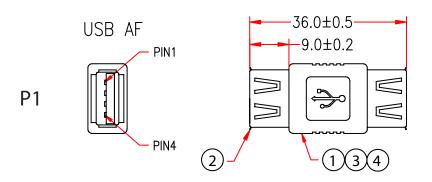





Pin Assig	nment
P1	P2
1 ————————————————————————————————————	1 2 3 4 Shield



RoHS

4 Molded PVC Gray 3 Molded PE Color Transparent 2 USB A Female 2.0, Gold Plating 30u" on Coatacts, White Insulation, Nickel Plated 1 NON-UL 28AWG Insulator Soft PVC. Length 13mm(4 Pcs) & 20mm(1 Pcs)		
3 Molded PE Color Transparent 2 USB A Female 2.0, Gold Plating 30u" on Coatacts, White Insulation, Nickel Plated		
2 USB A Female 2.0, Gold Plating 30u" on Coatacts, White Insulation, Nickel Plated	4	Molded PVC Gray
	3	Molded PE Color Transparent
1 NON-UL 28AWG Insulator Soft PVC Length 13mm(4 Pcs) & 20mm(1 Pcs)	2	USB A Female 2.0, Gold Plating 30u" on Coatacts, White Insulation, Nickel Plated
11011 01 20111 01 110 110 110 110 110 1	1	NON-UL 28AWG Insulator Soft PVC, Length 13mm(4 Pcs) & 20mm(1 Pcs)
No. Specifications	No.	Specifications

Item Number:	30U1-02400		
Title:	USB Coupler / Gender C Type A Female to Type		
Drawn by:	JL		
Approved by:	MAC	88	
ID:	1	400	

	nder Changer, Type A Female
- [	8 8 8 - 2 1 2 - 8 2 9 5 CableWholesale