




REV.	DESCRIPTION	DATE
A		01-2014

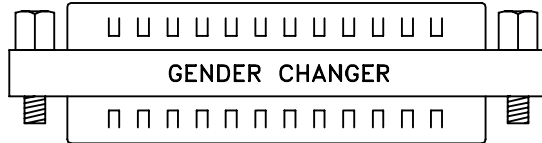

DB37 Male





DB37 Male

RoHS

Specification:

1. Voltage Rating: 300 VAC(rms).
2. Current Rating: 5 AMP Continuous.
3. Dielectric Strength: 1000 VAC.
4. Insulation Resistance: 5000 Mohm min.
5. Durability: 30 Cycles for Gold Flash,
150 Cycles for 15u Gold Plated.
6. Corrosion Resistance: Meet MIL-STD-202F Method
101 Condition B Salt Water, Spray for Gold Plated Over 15u.
7. Mating Force Insertion Force: 1 oz -6 oz
Average 150 gram, Extraction Force: 1 KG min.

ITEM NUMBER	31D4-03100		DRAWER	JL
TITLE	Serial Mini Gender Changer / Coupler DB37 Male to DB37 Male		CHECKED	
			APPROVED	
MATERIAL		SCALE	 	
REV.	A	UNIT		MM
DRAWING NO:			