

Rev.	Description	Date
A	LC Single-mode	1-2023

**Intermateability:** Compliant with TIA/EIA 604-10; Free of hazardous substances according to RoHS 2002/95/EG

**SPECIFICATIONS**


General Specifications	
Fiber Category	Single-mode (OS2)
Product Type	Field-Installable Connectors
Corning Logo	Yes
Keyed (security)	No
Technology	Field Polish (anaerobic)

Standards	
RoHS	Free of hazardous substances according to RoHS 2011/65/EU


Environmental Conditions	
Temperature Range, Operation	-40 °C to 75 °C (-40 F to 167 F )

Design - Connector	
Connector Type	LC
Housing Color	Blue
Housing Material	Composite
Boot Color	Blue

Optical Specifications - Connector	
Insertion Loss, Max.	0.75 dB
Reflectance	≤ -40 dB
Insertion Loss, Typical	≤ 0.1 dB
Package Contents	Connector, Trigger, Crimp Band (1.6/2.0 mm), Crimp Band (3.0 mm), Boot (900 µm), Boot (2.0 mm), Boot (3.0 mm)

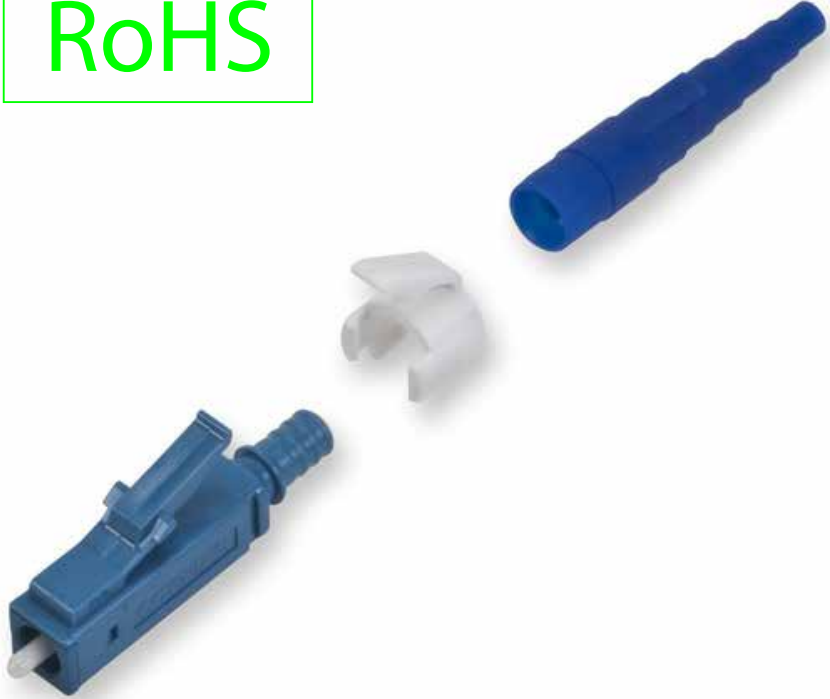

Corning 95-201-98-SP

Item Number:	32LC-01295	
Title:	95-201-98-SP Corning Anaerobic Connector, LC, 9um OS2	
Drawn by:	MNM	
Approved by:	MAC	
ID:		