


| REV. | DESCRIPTION | DATE |
|------|-------------|---------|
| A | | 08-2013 |
| | | |

RoHS

| Pin Assignment | | |
|----------------|--------|---------------|
| DB25P/F I/O | Switch | DB25/F A&B |
| 1 | 1 | 1 |
| 2 | 2 | 2 |
| 3 | 3 | 3 |
| 4 | 4 | 4 |
| 5 | 5 | 5 |
| 6 | 6 | 6 |
| 7 | 7 | 7 |
| 8 | 8 | 8 |
| 9 | 9 | 9 |
| 10 | 10 | 10 |
| 11 | 11 | 11 |
| 12 | 12 | 12 |
| 13 | 13 | 13 |
| 14 | 14 | 14 |
| 15 | 15 | 15 |
| 16 | 16 | 16 |
| 17 | 17 | 17 |
| 18 | 18 | 18 |
| 19 | 19 | 19 |
| 20 | 20 | 20 |
| 21 | 21 | 21 |
| 22 | 22 | 22 |
| 23 | 23 | 23 |
| 24 | 24 | 24 |
| 25 | 25 | 25 |
| Shell | | Shell |

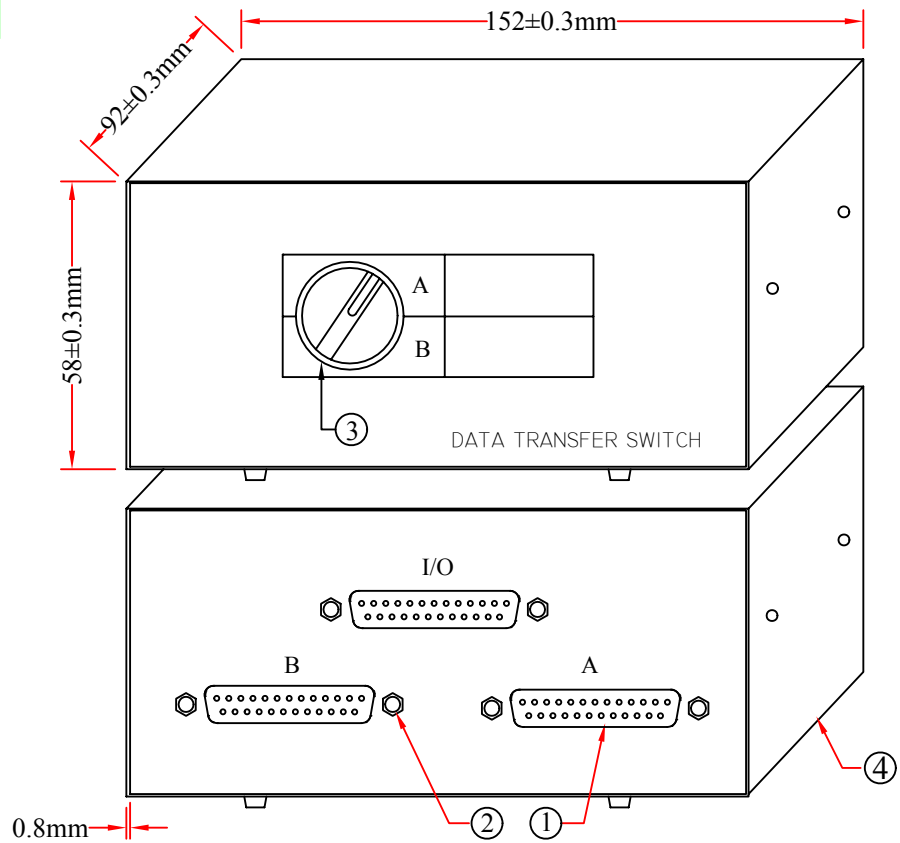

| | |
|----------|--|
| 4 | Metal Case, Thickness 0.8mm |
| 3 | Manual Rotary Switch (2 Positions) |
| 2 | Hex-Nut Screw 4.75*12.3m |
| 1 | D-USB 25Pin Female,Gold Plating Contacts, Blue Insulator |
| NO. | SPECIFICATIONS |
| BOM LIST | |

| | | | | | |
|-------------|----------------------------------|-------|------|----------|----|
| ITEM NUMBER | 40D3-17602 | | | DRAWER | JL |
| TITLE | AB 2 Way Switch Box, DB25 Female | | | CHECKED | |
| MATERIAL | | SCALE | | APPROVED | |
| REV. | A | UNIT | INCH | | |
| DRAWING NO: | | | | | |